


Input Handler

This function initializes all required variables for input handling.

Cracking

This function starts, according with chosen parameters, the cracking.

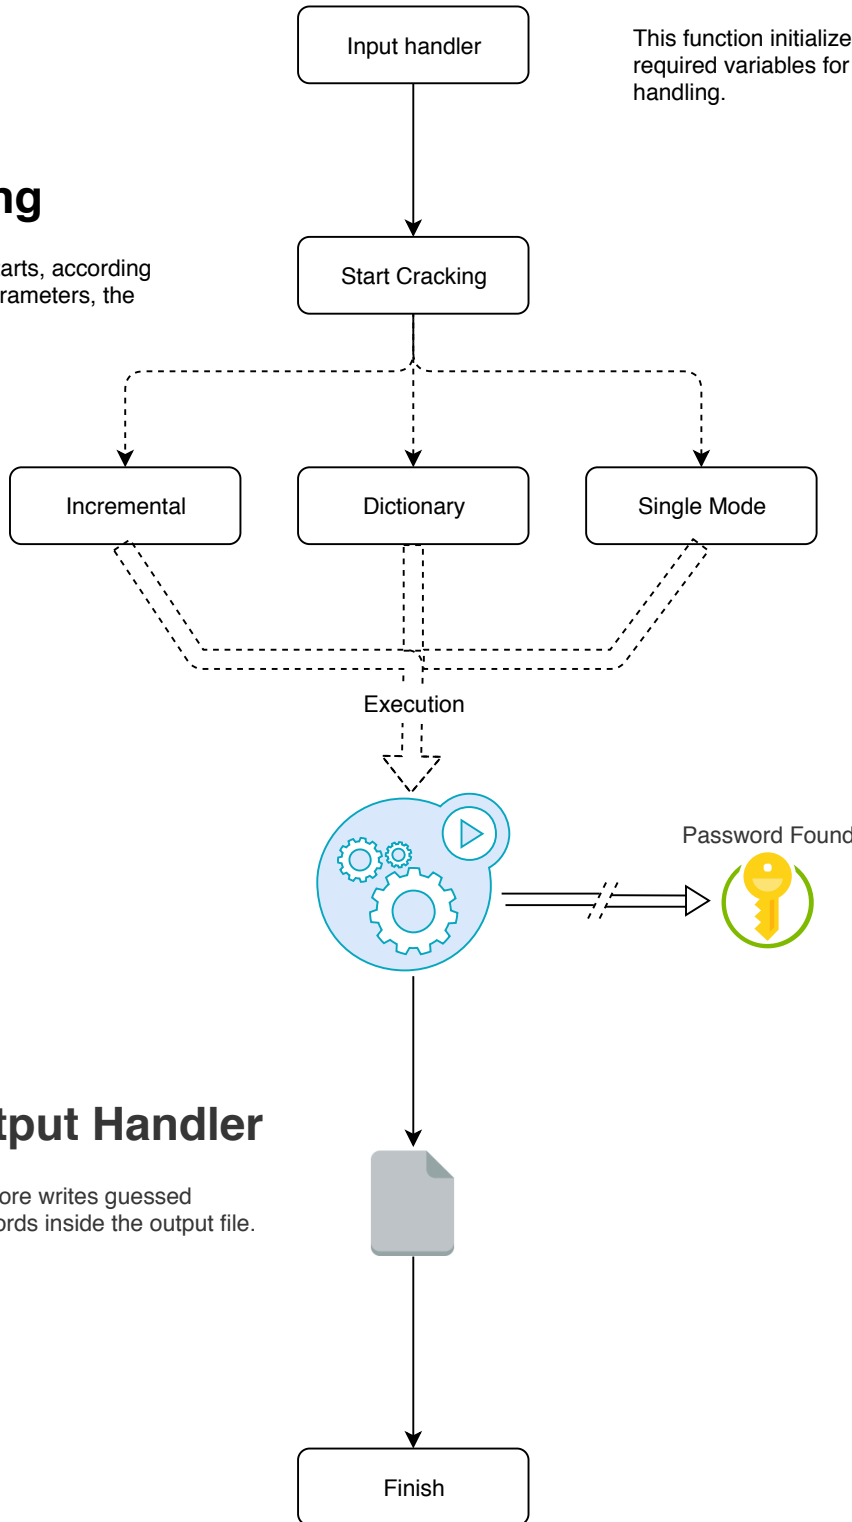

Password Found

When a password is found a message is sent from the core that founds the password to each other core.



Output Handler

Each core writes guessed passwords inside the output file.