

1 Function authorizations

Overview

Menu	System administration → User administration → Function authorizations
Transaction code	faut
Function authorization	faut

Use

You use function authorizations to control which user can access or execute a specified application/function.

You can assign individual function authorizations for specified functions, or you can assign [Function profiles](#) (defined groups of authorizations). All applications, which include editing functions for recorded data, are protected. Only authorized users can use the functions.

Integration

Function authorizations are used in the client to control the access to e.g. applications or fields.

Requirements

You must create the users before you can assign function authorizations.

Selection criteria

The application provides the following selection criteria:


User

Select the function authorizations that are assigned to a user.

Function

Select the function authorizations assigned to a user via the function.

Field description

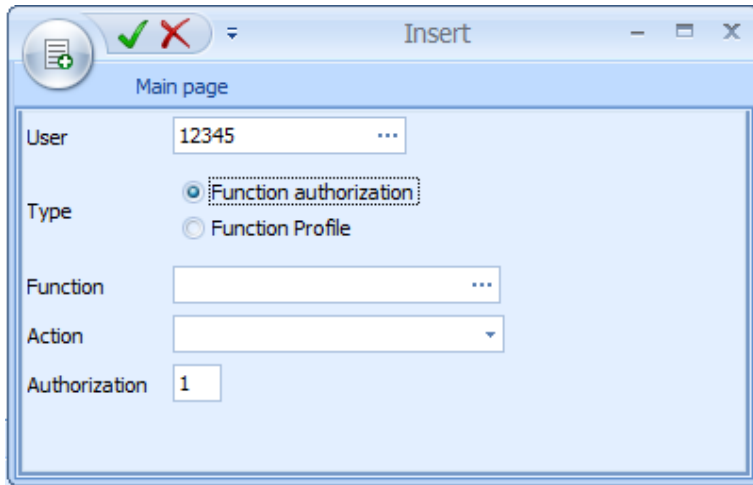

Type "Function authorization" (single authorization)

Function

If you assign authorizations for a specific function, you can not only assign the authorization for the function, but also for specific actions.

Action

To edit data, the following actions are available in the selection list:

- create
- copy
- edit
- delete
- view (= view only)

You can enter further actions. Actions are documented in the application that processes the special actions.



If you assign a function without restriction to the possible data maintenance actions (the "Action" field remains empty), authorization is assigned for the create/copy/change/delete/display actions.

If you want to assign several actions of a function authorization to a user, then you must define the required authorization with the respective actions.

The actual function authorization is made up of the *function* and the *action* in the form "<function>.<action>".



The independent field *Action* is only available when you create data records. You can easily select the respective actions then. In the other detail applications, the *Action* is included in the field *Function*.

Example:

If you want to assign the authorizations *Create user* and *Edit user* to a user, but not *Delete*, the required authorizations are user.create and user.edit.

Authorization

The usual function authorizations do not process this field. You should set the value of this field to the default value 1.

In special use cases, you can enter an authorization level or another key number for the function authorization. The authorization level is rarely used and is then documented by the user where this exception is required.

Function locks

To improve the protection of personal data, Service Pack 13 has introduced the option of locking individual functions for specific users:

- Print
- Export, STRG+C



The function locks are available for the application "Persons". You can add functions if a customization of the standard is required.



The field "Action" remains empty if you create function locks.

Available function locks

You can deactivate the print function in the HR master data application by assigning "pers_disprt" to a user or profile (buttons "Print preview" and "Print all" are hidden and the associated keyboard shortcuts are deactivated).

You can deactivate an export in the HR master data by assigning "pers_disexp" (Excel export buttons in the context menu and the export buttons in the print preview are hidden. Furthermore, the key combination CTRL+C is ineffective for selected table cells).

Type "Function profile"

Function profile

You can assign an existing [Function profile](#) to a user.