

1 Messages (MOC)

Overview

Menu	Information management → Postings → Messages
Transaction code	hms
Function authorization	hms

Purpose

With the application "Messages" you can create and send messages. The application provides the following functions:

- Create new messages
- Mark messages read
- Answer messages
- Forward messages
- Close messages

Integration

The application "Messages" allows the communication with other persons. The following clients offer the possibility to send and receive messages:

- AIP2
- MOC
- SMA (requires a separate license)

The application is based on the HYDRA escalation management. Creating, answering, forwarding or closing messages are functions that follow the mechanisms of the escalation management. Possible restrictions that are valid for the escalation management also apply to the use of this application.

Requirements

The implementation of the HYDRA Messaging Services (HMS) includes the necessary programs and configurations.

You have linked HYDRA users of the [User administration](#) to persons of the [HR master](#). These users/persons can exchange messages. If you want to send messages to function groups, you have to generate the groups beforehand in the application [Function groups](#).

If you want to send a message to a terminal, the MOC does not require specific configurations.



In general, you can send a message to all persons, function groups or terminals. A specific workflow is not defined, i.e. it is not defined who can send a message to which recipient. The system does not guarantee that the recipient reads a message.

Selection criteria

In general, the function shows all active message histories i.e. that are not closed. In addition, the function shows all messages (histories) that were closed within the last <number> days:

Showing messages closed within the last <number> days

In addition to the active message histories, the function shows the messages marked closed within the last <number> days.



The system checks the time a message was closed. The time is displayed in the column *End* of the detail application *Overview*.

You can specify how long closed messages (histories) are shown. Two settings define this period: The entry of the <number> of days and the time the data is retained in the online data area of the escalation management. The document [MBL_ESK_Archiving.pdf](#) provides further information on archiving of messages in the escalation management.

Toolbar

The application offers the following functions. The chapter [Editing functions](#) includes further information on the individual functions.

The buttons are context sensitive.



New message

Function authorization: hms.new

Use this button to create a new message.



Read

Function authorization: hms.read

Use this button to mark a message read. The button is only active, if a message addressed to the user is selected in the detail application *Messages* and if the user has not yet marked the message read.



Clicking on this button does not open a dialog. The message is directly marked read.

Answer

Function authorization: hms.answer

Use this button to answer a message.

The button is only active, if a message addressed to the user is selected in the detail application *Messages*. The status column shows the symbol  and the column *Person* (category *Recipient*) shows the personnel number. It is the number that the user administration has assigned to the logged in MOC user.



Forward

Function authorization: hms.forward

Use this button to forward a message.

The button is only active, if a message addressed to the user is selected in the detail application *Messages*. The status column shows the symbol  and the column *Person* (category *Recipient*) shows the personnel number. It is the number that the user administration has assigned to the logged in MOC user.



Close

Function authorization: hms.close

Use this button to close a message history.

The button is only active, if the message history has not yet been closed.



Each person involved in the message history can close the message history. This is not restricted to the person who has created a new message.

When you close a message, it is automatically marked read. When you close a message, the time of the last message is updated. This message history is now shown on top (in case of descending chronological order).



Overview

Use this button to expand the message header in the detail application *Overview*. The expanded row shows the text of the first message of the message history.



Messages

Use this button to expand the messages in the detail application *Messages*. The expanded row shows the text of the message.

Detail application Overview

The detail application *Overview* shows all messages that were sent by or to the logged in MOC user.

If the logged in MOC user has not yet marked a message *Read* in the detail application *Overview*, the data row is highlighted in **bold**. The detail application [Messages](#) indicates which message of the whole message history has not yet been read. You can also see who has marked a message read. If the logged in user has not read a message of the message history, you can see this in the detail application *Overview*. If one of the other communication partners has not read a message of the message history, this message is only marked unread in the detail application *Messages*.

The columns available in the table are described below. Use the column selection function to add columns that are not displayed by default. The actual order of the fields described and the assignment to a category need not comply with the description below.

No title

No title

The column *No title* shows the status of the message history. Possible entries in the column *No title*:

Symbol	Meaning
	The message history is closed.
	The message history is active and still in process.

Unread messages

If the message history includes at least one unread message for the MOC user, the checkbox is checked ☒.

Status

The column *Status* shows the status of the message history. Possible entries in the column *Status*:

- Completed
 - The message history was closed.
- In process

- The message history is active and still in process.

Reference

The column *Reference* displays the internal identification of the message history in the database table *esk_event_msg*.

Final comment

Once the message history is closed, the column *Final comment* shows the comment of the message history.

Last message

Date/Time

The column *Date/Time* shows date/time of the most recent message of the message history.

Communication partner

The column *Communication partner* shows the last communication partner of the message history.

Subject

Subject

The column *Subject* shows the subject of the message that was entered on creating a new message.

Text

The column *Text* shows the text of a message that was entered on creating a new message.

Start

The column *Start* shows the Time/Date of the first message of the message history.

End

Once the message history is closed, the column *End* shows the point in time when the message history was closed.

Detail application Messages

The detail application Messages shows all messages of a selected message history.

By default, the messages are in descending chronological order (most recent message on top). If you send a message to a function group with several persons, the display order of the recipients is random.

If a message is unread, one data row is highlighted in **bold**. A message is unread, if:

- the logged in user has not yet marked the message read.

- the recipient of the message has not yet marked the message read.

The columns available in the table are described below. Use the column selection function to add columns that are not displayed by default. The actual order of the fields described and the assignment to a category need not comply with the description below.

Status

No title 1

The column *No title 1* displays symbols that provide information on the history of the communication. The symbols and their meaning are:

Symbol	Meaning
	The logged in user has received the message.
	The logged in user has sent the message.
	The message is part of a message history that was created before being forwarded to the logged in user OR the sender has sent the message to a function group including further persons than the logged in user.

No title 2

The column *No title 2* displays symbols that provide information on the status of the message. The symbols and their meaning are:

Symbol	Meaning
	The message is read.
	The message is unread.

Message

Date/Time

The column *Date/Time* shows the point in time when the corresponding message was created in the message history.

Communication partner

The column *Communication partner* shows the communication partner of the message.



If a message has been forwarded, the recipient of the forwarded message is displayed as communication partner.

Type of communication partner

The column *Type of communication partner* shows the type of the communication partner.

Sender/recipient

The column *Sender/recipient* shows an abbreviation that identifies the communication partner of a message as sender or recipient.

R – Recipient

S – Sender

Text

The column *Text* shows the text of a message.

Reference

Reference

The reference is the internal identification of a message (being part of a message history) in the database table *esk_event_msgdet*.

ESK reference

The ESK reference is the internal identification of the message history in the database table *esk_event_msg*.

Sender

Type of sender

The column *Type of sender* shows the type of the sender that has sent the message.

- P – Person
- T – Terminal

Person

If the sender of a message is a person, the column *Person* displays the personnel number of the sender.

Terminal

If the sender of a message is a terminal, the column *Terminal* displays the terminal number of the sender.

Recipient

Type of recipient

The column *Type of recipient* shows the type of the recipient of a message. The following entries are possible:

- Terminal
- Person
- Function

Person

If the recipient of a message is a person, the column *Person* displays the personnel number of the recipient.

If the recipient of a message is a function group, the message is "resolved" and sent to every person of the function group. The column *Person* then displays the personnel number of each person.

Terminal

If the recipient of a message is a terminal, the column *Terminal* displays the terminal number of the recipient.

Function

If the message is sent to a function group, the column *Function* shows the function group.

Person currently logged in

Person currently logged in

The column *Person currently logged in* shows the personnel number of the person currently logged in.

Editing functions

The following field descriptions refer to the functions that you can start via the toolbar. Depending on the corresponding function, some fields can be edited, some can be read only.

Overview of the fields you can edit in each function

	New message	Answer	Forward	Close
Type of recipient	✓	read-only	✓	not available
Recipient (Person/Function/Terminal)	✓	read-only	✓	not available
Subject	✓	read-only	not available	not available

	New message	Answer	Forward	Close
Text/Comment/Final comment	✓	✓	✓	✓
E-mail	✓	✓ / read-only for terminal	✓	not available

Field descriptions

Type of recipient

In the field *Type of recipient* you can select the type of recipient. Depending on the selection made, the field shows *Person*, *Function* or *Terminal*.



The search function of the fields *Person/Function/Terminal* does not filter. The application shows all created persons, function groups and terminals.

The system does not verify, if the recipient can display the message. Persons without sufficient authorizations or clients that do not support the messaging function might be recipients of a message without being able to display the message.

Person

In the field *Person* you enter the unique personnel number of the recipient.

Function

In the field *Function* you enter the name of the function.

Terminal

In the field *Terminal* you enter the terminal number of the receiving terminal.



Not only can the shop floor terminals AIP2 receive and send messages.

Subject

In the field *Subject* the subject of a message is entered.



You can use a maximum number of 50 characters.

Text

In the field *Text* you enter the message content.



You can use a maximum number of 600 characters.

E-mail

If you select this function, an e-mail is sent in addition to the message.



You can only use the option *E-mail* in connection with the types of recipient *Person* and *Function*. The necessary configurations for sending e-mails require the escalation management license. The configurations are described in the documentation dealing with the escalation management.

Comment (only Forward)


If you forward a message, you can use this field. You can enter a comment on the forwarded message in this field. The original message content is not changed.

Comment (only Close)

If you close a message history, you can use this field. You can enter a final comment in this field that is displayed in the column *Final comment* of the detail application [Overview](#). The original message content is not changed.

Further notes on processing

When the logged in MOC user receives a new message, a pop-up appears on the bottom right.

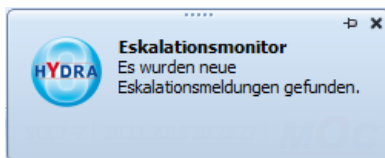

If the user clicks on the text in the pop-up, the user is led to the MOC application *Current escalations*. The messages are listed in the escalation HMS.MESSAGE.



The escalation applications do not support the function of sending messages. Only use the application *Messages* to this end.