

Manual

Interface Wage and Salary Programs (Payroll) EIS-LUG 8.2

Version 1.0.22770

Last changed on: 06.08.2020

Copyright

©Copyright 2020 All rights reserved.

SAP® and R/3® are registered trademarks of SAP AG.

WINDOWS® is a registered trademark of Microsoft Corporation.

MPDV® and HYDRA® are registered trademarks of MPDV Mikrolab GmbH.

ORACLE® is a registered trademark of ORACLE Corporation, California, USA.

Copying and distribution of this documentation or any part thereof, for any purpose or in any form, is prohibited without prior written permission from MPDV Mikrolab GmbH.

The information contained in this documentation is subject to change without prior notice.

Contents

1	Interface Wage and Salary Programs: Overview	7
2	HR Master Transfer	8
2.1	Character set	8
2.2	Formatting of different data types	8
2.3	Available dialogs	9
2.4	Parameters for the transfer of HR master data	10
2.5	Notes on some parameters	15
2.5.1	Personnel number PNR.PNR	15
2.5.2	Badge PNR.KNR	15
2.5.3	Authorization levels PNR.ASTUFE and PNR.MSTUFE	16
2.5.4	Info fields	16
2.6	HR master with version control	17
2.6.1	Overview	17
2.6.2	Please note for PNR.MODIFY	18
2.7	Sample data record for a person	18
2.8	Import of data in HYDRA	18
2.8.1	Manual start of the interface program	18
2.8.2	Definition for transferring data from SAP	19
2.8.3	Transfer from other systems (file-based via MLE)	20
3	Transferring Account Balances	22
3.1	Parameters for transferring the balance accounts	23
3.2	Data record as an example of an account modification	23
4	Interface to Payroll Accounting Programs - Summary	24
5	Blocking time and attendance data after end of month	26
6	Interface configuration	27
6.1	General configuration of the interfaces	27
6.1.1	Calculation rules for MONTH=xxx and DAY=xxx	29
6.1.2	Configuration of the absence interface	31
6.1.3	Set person-related options	32

6.2	Configurations specific to interfaces	33
7	Formats used to Upload Data to Payroll Accounting	34
7.1	HYDRA standard format.....	34
7.1.1	Upload of monthly wage types.....	34
7.1.2	Upload of absences.....	36
7.2	Abacus.....	38
7.2.1	Upload of monthly wage types.....	38
7.3	Exakt LohnXL / XXL	39
7.3.1	Upload of monthly wage types.....	39
7.4	CSS fixed wage.....	41
7.4.1	Upload of monthly wage types.....	41
7.5	DATEV (LODAS).....	43
7.5.1	Upload of monthly wage types.....	43
7.5.2	Upload of absences.....	47
7.6	DATEV comfort	48
7.6.1	Upload of monthly wage types.....	48
7.6.2	Datev_comfort.ini	49
7.6.3	hylobu.dat.....	49
7.6.4	Example file.....	51
7.7	eGecko (CSS)	53
7.7.1	Upload of monthly wage types.....	53
7.7.2	Upload of absences.....	55
7.8	FOSS-Lohn (ORDAT)	56
7.8.1	Upload of monthly wage types.....	56
7.9	GENERIC.....	59
7.9.1	Upload of monthly wage types.....	59
7.9.2	Upload of absences.....	63
7.10	HANSALOG (record type V1).....	64
7.10.1	Upload of monthly wage types.....	64
7.11	HANSALOG (record type V3).....	65
7.11.1	Upload of monthly wage types.....	65
7.12	INTEGRA.....	67
7.12.1	Upload of monthly wage types.....	67
7.13	KASPAR	69
7.13.1	Upload of monthly wage types.....	69

7.14	KDVLOHN_V2 (Kanne, new format CSV file).....	71
7.14.1	Monthly wage types: 77n (data without cost center)	71
7.14.2	Absences: 7Fn (calendar dates).....	73
7.15	KDVLOHN (Kanne, old format fixed record length).....	76
7.15.1	Upload of monthly wage types.....	76
7.16	LGVSofT	78
7.16.1	Data format of the wage types: V4 (wage types)	78
7.16.2	Data format for absence times data: V9 (events).....	79
7.17	LOGA.....	81
7.17.1	Upload of monthly wage types.....	81
7.17.2	Upload of absences.....	83
7.18	LOGA 400	86
7.18.1	Upload of monthly wage types.....	86
7.18.2	Upload of absences.....	89
7.19	Navision Wage	91
7.19.1	Upload of monthly wage types.....	91
7.20	ORGATIME	92
7.20.1	Upload of monthly wage types.....	92
7.21	Paisy	93
7.21.1	Upload of monthly wage types.....	93
7.21.2	Upload of absences.....	95
7.22	PASBAS (Syllwasschy)	97
7.22.1	Upload of monthly wage types.....	97
7.23	PEWISO (S+P payroll accounting)	99
7.23.1	Upload of monthly wage types.....	99
7.24	proLOHN (proALPHA).....	100
7.24.1	Upload of monthly wage types.....	101
7.24.2	Upload of absences.....	103
7.25	sage KHK.....	104
7.25.1	Upload of monthly wage types.....	104
7.26	Taylorix	105
7.26.1	Upload of monthly wage types.....	105
7.27	TOPAS.....	108
7.27.1	Upload of monthly wage types.....	108
7.27.2	Upload of absences.....	110
7.28	Varial.....	111

7.28.1 Upload of monthly wage types.....	111
7.29 Winlohn (Sage Schweiz AG)	113
7.29.1 Upload of monthly wage types.....	113
7.30 VEDA	115
7.30.1 Upload of monthly wage types.....	115
7.30.2 Upload of absences.....	118
8 Set person-related options	120
9 Interface to Payroll Accounting	122
10 Premium/ Incentive Wage Uploads.....	126
10.1 Data record structure for incentive wage uploads.....	126
10.2 Description of data fields for incentive wage uploads	127
10.3 Example file:.....	128
11 Synchronizing File Interfaces	129

1 Interface Wage and Salary Programs: Overview

Possible fields of application

This function package includes functions to transfer the HR master from and to the payroll system for transferring monthly wage types and absences.

Implementation notes

The function package is used if you:

- Would like to transfer the HR master from a higher level system.
- Would like to transfer the results of time management to a payroll system.

Integration

This function package can only be used if time management is done in HYDRA (function package "assessment of labor times").

Functions

- Provision of monthly results
 - Provision of total wage types and absences in the HYDRA standard format
 - Provision of data in the specific format for SAP R/3 HR, DATEV, IBM Lohn und Gehalt, PAISY, LOGA (P&I), LOGA 400 (P&I), Exact.Lohn XL / XXL, Taylorix, SAGE KHK, Pro Lohn, Varial, Hansalog, CSS Fix Lohn, Abacus, Integra, Microsoft Dynamix NAV, FOSS, KDVLOHN, PASBAS, and much more besides.
 - Transfer of account balances by the end of the month in the form of wage types.
- Block month
 - The month is blocked for specific users, once data has been transferred to payroll accounting.
- Transfer of people
 - Transfer of people and their account balances (if required) in the HYDRA-standard format.

2 HR Master Transfer

This interface for transferring HR data to HYDRA has been implemented using a new technology for universal interfaces. Using this technology, a separate command (so-called "dialogs") is listed in the interface file for each line to import the required data. The interface program processes these dialogs sequentially and writes a log file of the results.

Each line of the interface file contains a dialog with all of the relevant data. The most important components are the **dialog ID** and the **parameters** belonging to the dialog.

Example of a dialog (one line from an interface file):

```
DLG=PNR.DELETE|PNR.FIR=012|PNR.PNR=002449|...
```

Explanation

PNR.DELETE is the dialog identification. Vertical lines ("|", ASCII 124) are used to separate the different parameters (PNR.FIR, PNR.PNR, ...). Select a field width for the different parameters that is wide enough for the presentation. However a fixed file structure can also be realized by adding leading zeros (for numbers) and trailing spaces. The sequence of the parameters is irrelevant. Some parameters are mandatory and must always be included in a dialog. Other parameters are optional and are specified if required or left out. Fields that are not included in the interface are assigned the default value when a person is created. These fields are not overwritten when you change the data of a person. You therefore manage these fields in HYDRA.

2.1 Character set

As of MESWeaver 2.1, HYDRA is based on Unicode. Interface files are therefore expected in format UTF-8 without BOM (Byte Order Mark).

2.2 Formatting of different data types

The following formats are supported:

Data type	Format	Examples
N<x>	Digits, maximum of <x> places	PNR . PNR=2449 or PNR . PNR=002449
N<x>.<y>	Decimal number with a maximum of <x> predecimal places and <y> decimal places. A dot is the decimal separator.	PNR . PSTDSATZ=30.5 or PNR . PSTDSATZ=00030.5

Data type	Format	Examples
C<x> Texts (character)	Character string with the maximum length <x>; the maximum length does not need to be filled up with blank characters.	PNR.NAME=Huber or PNR.NAME=Huber
Date	MM/DD/YYYY (American format: month, day, year. Slashes are used as separator.)	STMP.DAT=12/31/2002
Times or durations	Seconds since midnight or HH:MM or HH:MM:SS or HH,DDD or HH.DDD H hours (as many places as required) M Minutes (in groups of 60) S Seconds D Industrial or decimal minutes (in groups of 100)	STMP.ZEI=52200 or STMP.ZEI=14:30 or STMP.ZEI=14:30:00 or STMP.ZEI=014,5 or STMP.ZEI=14.500

2.3 Available dialogs

The following dialogs are available to transfer the persons:

- PNR.INSERT to create a person
- PNR.UPDATE to change a person
- PNR.DELETE to delete a person
- PNR.MODIFY This dialog checks on the basis of the personnel number whether or not the person already exists in HYDRA. If the person is available, the person is modified, if not, the person is created.

Note:

If a person is created using PNR.INSERT or PNR.MODIFY, the system automatically assigns basic authorizations for the clockings of the time and attendance (PZE) and for the access of the access control (ZKS). In PZE, the person is authorized for the terminal group 99, and in ZKS, the access profile 999 is assigned automatically.

2.4 Parameters for the transfer of HR master data

The identifiers in column "Mandatory" specify the dialogs with mandatory fields:

- I For INSERT and MODIFY
- U For UPDATE and MODIFY
- D FOR DELETE

Dialog: PNR.*				
Parameter	Type	Mandatory	Contents	Description
General data				
PNR.PNR	N8	I/U/D	Personnel number	The personnel number is the key field to access the person's data
PNR.PNAME	C 40		Name	
PNR.PVORNAME	C 20		First name	
PNR.PVORNAME:2	C 20		Middle name	
PNR.KUERZEL	C10		Initials	Initials of the person (*1)
PNR.FIR	C 4	I	Company	Company of the person
PNR.BER	C 8	I	Area	
PNR.KST	C10	I	Cost center	The person's regular cost center
PNR.EINTRITT	Date	I	Date of joining	
PNR.AUSTRITT	Date		Date of leaving	
PNR.SVERTRETER1	Integer		Replacement 1	Personnel number of replacement 1 (*1)
PNR.SVERTRETER2	Integer		Replacement 2	Personnel number of replacement 2 (*1)
PNR.KNR	C10		Staff badge	Badge number
PNR.ANREDE	C 20		Salutation	Salutation of the person (*1)
PNR.PRODEPLOY EE	C1		Production employees	Identifies if it is a production employee or not (available as of SP13/25.10.2018)

Dialog: PNR.*				
Parameter	Type	Mandatory	Contents	Description
PNR.VAB	C 15		Responsibility area	ID controlling which user is authorized to access the data of which persons. If the responsibility area remains empty, every user can access the person's data.
PNR.TAETIGKEIT	C 20		Activity	
PNR.TITEL	C 20		Title	Academic titles (form of address)
PNR.NATION	C 3		Nationality	e.g. "D" or "F" or "CH" or "GB" or "US" or "CZ",etc.
PNR.GEBDAT	Date		Date of birth	
PNR.GEBORT	C 30		Place of birth	Place of birth of a person (*1)
PNR.SCHULE1	C 50		School-leaving qualification	School-leaving qualification of the person (*1)
PNR.SCHULE2	C 50		Secondary school-leaving qualification	Secondary school-leaving qualification of the person (*1)
PNR.STRASSE	C50 (*1)		Street	Street and street number of place of residence
PNR.PLZ	N5		Zip code	ZIP code of the place of residence
PNR.ORT:WOHN	C 20		Domicile	
PNR.TEL:FIR	C 20		Company phone	
PNR.TEL:PRIVAT	C 20		Private phone	
PNR.MOBILTEL:FIR	C 20		Company mobile	
PNR.MOBILTEL:PRIVAT	C 20		Private mobile	
PNR.EMAIL:FIR	C 50		Company e-mail	
PNR.EMAIL:PRIVAT	C 50		Private e-mail	
PNR.GESCHLECHT	C1		Gender	M: male W: female
PNR.FAMSTAND	C1		Family status	L: Single V: Married W: Widowed G: Divorced
PNR.PNR:VGS	N8		Supervisor	Personnel number of supervisor
PNR.INFOFOTXT:n	C 40		Text field n (n from 1 to 10)	Free text field with a maximum of 40 characters. In particular with existing or planned interfaces to SAP, pay attention to the notes on the info fields below.
PNR.INFOFOTXT:n	C 20		Text field n (n from 11 to 15)	Free text field with a maximum of 20 characters. In particular with existing or planned interfaces to SAP, pay attention to the notes on the info fields below.
PNR.INFOFOTXT:n	C10		Text field n (n from 16 to 20)	Free text field with a maximum of 10 characters. In particular with existing or planned interfaces to SAP, pay attention to the notes on the info fields below.

Dialog: PNR.*				
Parameter	Type	Mandatory	Contents	Description
PNR.INFOWERT:n	N8		Number field n (n from 1 to 5)	Free number field with a maximum of 8 characters. In particular with existing or planned interfaces to SAP, pay attention to the notes on the info fields below.
PNR.INFODAT:n	Date		Date n (n from 1 to 5)	Free date field. In particular with existing or planned interfaces to SAP, pay attention to the notes on the info fields below.
Data for the Personnel Time Management PZW				
PNR.ABT	C 8		Department	
PNR.PKREIS	C 8		Employee subgroup	
PNR.GLZJMOD	N4		Working time model	Number of the model
PNR.SCHZARTJMOD	N4		Shift rhythm model	Number of the model
PNR.ENTLJMOD	N4		Payment model	Number of the model
PNR.ENTLTMOD:MEHRARB	N4		Overtime type	Number of the payment day type
PNR.BESCHVERH	C1		Type of contract	G: Salaried A: Non-salaried
PNR.AVGAZ	Duration		Average working time	If configured accordingly, this time is posted for absences.
PNR.TZGRAD	N3.3		Part-time rate	Part-time rate in percent with a maximum of three decimal places
PNR.ETGAWDAT	Date		First allocation	Date when this person is first evaluated by the PZE workday evaluation. You can fill in this field if the date is not the date of joining.
PNR.ZNWL	N3		Time sheet	Number of time sheet for display in SMA or WEB
PNR.DGBERECHT	C1		Business trip authorization	J/N
PNR.SPERR:PZE	C1		Blocking indicator PZE	S: Person is blocked for PZE. Empty: Person is not blocked.
PNR.OPT:NSTMP	C1		Person does not clock	J/N
PNR.OPT:AVGAZVERB	C1		Allocate average working time	J/N
PNR.URLANSR:NORM	N3.1		Annual leave entitlement	Annual entitlement to vacation.
PNR.URLANSR:SONDER	N3.1		Special leave entitlement	Annual entitlement to special leave.
PNR.URLANSR:ZUSATZ	N3.1		Additional leave entitlement	Annual entitlement to additional leave.
Data for Shop Floor Data Collection BDE				
PNR.PGRP	N3		Employee group	
PNR.BDEJMOD [PNR.SJMOD:BDE]	N3		Year model	Number of the BDE shift year model (The ID PNR.SJMOD:BDE is outdated and only used if PNR.BDEJMOD is not set.)

Dialog: PNR.*				
Parameter	Type	Mandatory	Contents	Description
PNR.SMNR	C 8		Workplace	Regular workplace. Leading zeros are required for numeric machine numbers!
PNR.MEHRMNR	C1		Multi machine operation	Logon to multiple machines allowed J/N.
PNR.OPT:AGWAUTO	C1		Automatic OP change	J/N
PNR.PLAUS: PNRANAG	C1		BDE check whether or not the person has to be logged on to the OP	J/N
PNR.PLAUS: SMENGE	N1		Activate BDE target quantity check	0: The operation can be logged off at any time 1: A check is performed indicating whether or not the current actual quantity is within the "underproduction" and "overproduction" limits. If this is not the case the logon is rejected. 2: as in 1, in addition the person has to be logged on to the OP!
PNR.UPG	N3		Minimum target quantity	For the target quantity check, in percent of the planned quantity.
PNR.OPG	N3		Maximum target quantity	For the target quantity check, in percent of the planned quantity.
PNR.OPT:PABSKE	C1		Automatic logoff of personnel when shift ends	J/N. Default=J. This option is used if the automatic shift change function is in use and if the person is logged on to an operation where the option <i>Use workplace settings</i> is defined for the relevant order type and if the person is logged on to a workplace where the <i>Use personal settings</i> option is set.
PNR.ASTUFE:1	N1		Authorization for orders	0..9: Authorization level specifying whether or not the person may log on orders (comparison with the authorization level of the operation). see below.
PNR.ASTUFE:2	C1		Log OP on	J: The above authorization level refers to the logon of operations.
PNR.ASTUFE:3	C1		Log OP off	J: The above authorization level refers to the logoff of operations.
PNR.ASTUFE:4	C1		Log off all staff	J: The person may execute the terminal function "log all people off".
PNR.MSTUFE:1	N1		Authorization for machine status changes	0..9: Authorization level specifying whether or not the person is allowed to change statuses (comparison of the authorization level from the (machine) status assignment).

Dialog: PNR.*				
Parameter	Type	Mandatory	Contents	Description
PNR.MSTUFE:2	C1		Change only if person is logged on	The person may only change statuses on the terminal if the person is currently logged on to the workplace.
PNR.MSTUFE:4	C1		Change of production lock (from HYDRA-MDE 7.2 on)	J: Authorization available N: No authorization By default = N.
PNR.SSTUFE:1	N1		Authorization to change target cycle and target partitioning on the terminal	0: No authorization 1: Authorization available
PNR.SSTUFE:2	C1		Authorization to change the target quantity on the terminal	J: Authorization available N: No authorization
PNR.SSTUFE:2	C1		Authorization to change the target quantity on the terminal	J: Authorization available N: No authorization
PNR.RSTUFE	N1		Status change of resources	0..9: Authorization level specifying whether or not the person is allowed to change resource statuses (comparison with the authorization level from the resource status assignment). Only relevant if HYDRA WRM or HYDRA DNC is in use
PNR.DLSTUFE	N1		DNC download authorization	0 = No authorization 9 = Authorization available Only relevant if HYDRA DNC is in use
PNR.ULSTUFE	N1		DNC upload authorization	0 = No authorization 9 = Authorization available Only relevant if HYDRA DNC is in use
PNR.SPERR:BDE	C1		Blocking ID BDE	S: Person is blocked for BDE (shop floor data collection). Empty: Person is not blocked. Please note: The field is NOT visible on the console.
Data for the Incentive Wage LLE				
PNR.PRKZ	C1		Premium indicator	'E' = individual piecework, 'G' = group piecework 'Z' or empty = time wage Default: empty.
PNR.PRGRP	C 3		Premium group •	
PNR.ANTFAKTLBON	N3		Premium factor	
PNR.BPOS	C 6		Operator position/function	
PNR.LPKZ	C10		Wage/premium indicator	

Dialog: PNR.*				
Parameter	Type	Mandatory	Contents	Description
PNR.LART	C 4		Wage type	
PNR.LGRP	C 4		Wage group	
PNR.OPT:PZEADEA BGL	C1		BDE/PZE comparison	J/N

Note:

When the persons are initially created (first interface run), do not pass the parameters PNR.PNR:VGS(supervisor); PNR.SVERTRETER1 (replacement 1); PNR.SVERTRETER2 (replacement 2) because this can lead to errors. An error occurs if a person is assigned to a supervisor that comes later in the interface file and is therefore not yet created. Recommendation: perform two inface runs one after the other. The first run is used to create the persons without supervisor. It guarantees that all persons are available. The second run is used to assign the supervisor. This run includes the parameters PNR.PNR:VGS(supervisor); PNR.SVERTRETER1 (replacement 1); PNR.SVERTRETER2 (replacement 2).

2.5 Notes on some parameters

2.5.1 Personnel number PNR.PNR

Unique number of the person. The personnel number has a maximum length of eight characters.

2.5.2 Badge PNR.KNR

Number on the staff badge that is assigned to the person. HYDRA can process badge numbers that are up to 10 characters long, however the number of characters considerably depends on the ID badge in use. If barcode badges are used for identification, numbers that are four characters long are recommended. The number of characters for the badge number may be defined in HYDRA, i.e. the interface program only transfers the configured number of characters. If the badge number is shorter than defined in the HYDRA setup, it is filled with leading zeros. If it is too long an error message appears and the dialog is rejected.

Note:

The badge number of a person can be empty. If a number is assigned, it must be unique in HYDRA like the personnel number. If a badge number is passed for a person that had been assigned to a person that has already left the company, the badge number of the person who has left is deleted and assigned to the new person.

2.5.3 Authorization levels PNR.ASTUFE and PNR.MSTUFE

Authorization logic that may be defined individually for ADE and MDE activities on the shop floor terminals. 0 = no authorization, .1 = low authorization, 9 = highest authorization.

2.5.4 Info fields

If your system has interfaces to SAP or will have SAP interfaces at a later stage, then please mind that part of the info fields is assigned SAP-specific additional data when the MINI HR master data is downloaded from SAP-HCM. Some fields are also required to control the person-related upload of data to the correct SAP system.

Free info text 9

When downloading the MINI HR master data from SAP, this field is assigned the "Customer Field 2" from SAP. By default, this field is not used by HYDRA.

Free info text 14

When downloading the MINI HR master data from SAP, this field is assigned the "Customer Field 1" from SAP. By default, this field is not used by HYDRA.

Free info text 16

When downloading the MINI HR master data from SAP, this field is assigned the "Source System" from SAP.



When uploading person-related data via interfaces to SAP, the Source System heads for the target SAP system the data of the person is transferred to. This applies for the following interfaces:

- Uploading time events via HR-PDC
- Uploading data of the Personnel Time Management to SAP-HCM, e.g. wage type postings or absences
- Uploading data of the Incentive Wage to SAP-HCM
- Other customer-specific interfaces with person-related data to SAP in the HR context (not PP-PDC)

If these interfaces are used, the customer must ensure that no other field contents are assigned to the info text 16. The info text 16 can remain empty, then the source system is identified using other methods; see documentation of the relevant interface.

Free info text 17

When downloading the MINI HR master data from SAP, this field is assigned the "Country Grouping" from SAP. This field can be used in HYDRA with the Time and Attendance PZE as subsystem of SAP-HCM (HR-PDC) when data is collected in combination with plausibility checks.

Free info text 18

When downloading the MINI HR master data from SAP, this field is assigned the field "ES_GRPGE_WORK_SCHED" from SAP. This field can be used in HYDRA with the Time and Attendance PZE as subsystem of SAP-HCM (HR-PDC) when data is collected in combination with plausibility checks.

Free info text 19

When downloading the MINI HR master data from SAP, this field is assigned a content that is made up of the fields PS_GRPGE_ATT_ABS_TYPE and ATT_ABS_REASON_GRPGE. This field can be used in HYDRA with the Time and Attendance PZE as subsystem of SAP-HCM (HR-PDC) when data is collected in combination with plausibility checks.

Free info text 20

When downloading the MINI HR master data from SAP, this field is assigned the field "EXT_WAGETYPE_GRPGE" from SAP. This field can be used in HYDRA with the Time and Attendance PZE as subsystem of SAP-HCM (HR-PDC) when data is collected in combination with plausibility checks.

2.6 HR master with version control

2.6.1 Overview

Optionally, you can manage the HYDRA HR master data in versions. You can manage different versions of a person that are/were valid at different times. To this end, the additional parameter **PNR.DATB** is used as "validity start date". It includes the validity start date in the date format.

The unique key for a HR master version consists of the personnel number PNR.PNR and the validity start date PNR.DATB. This applies for the update and deletion of HR master versions.

HYDRA automatically manages the validity end date of a version. An HR master version applies until the next version becomes effective. The validity date is not restricted if there is no subsequent version.

In case the validity start date is not specified, the interface always refers to the HR master version that is in effect at the time when the interface process is running.

2.6.2 Please note for PNR.MODIFY

If the validity start date PNR.DATB is not specified for the PNR.MODIFY dialog and there is currently no applicable HR master version, a currently applicable HR master version will be added by using the parameters transferred. Moreover, all existing HR master versions that are applicable from this day on are updated by the parameters transferred.

If the validity start date PNR.DATB is specified for the PNR.MODIFY dialog and this HR master version does not yet exist in HYDRA, this version will be added and an already existing version that is applicable on the validity start date will be used as basis (copied) and updated by the transferred parameters.

2.7 Sample data record for a person

All fields affecting a person are written in one line in the interface. In the below example, however, data is written in two lines to make it readable:

```
DLG=PNR.MODIFY|PNR.PNR=153443|PNR.KNR=001324|PNR.FIR=BSP|PNR.KST=B12_54|  
PNR.BER=Halle 17|PNR.EINTRITT=01/15/2010|PNR.PNAME=Maier|PNR.PVORNAME=Hans|
```

2.8 Import of data in HYDRA

2.8.1 Manual start of the interface program

Existing personnel data can be processed using the program hymw.

Windows: `hymw -u 199 -b filename.bap > filename.log`

or

Linux: `hymw.out -u 199 -b filename.bap > filename.log`

Note: You must call the program in the HYDRA directory.

Parameter

-u <usernummer>

Here, a unique numeric value must be selected as the <UserNumber>. If interfaces run at the same time with the same UserNumber, they interfere with each other and supply false results. Recommended are numbers ranging between 1 to 200.

-b <inputFile>

Name of file with HR master data.

> <logfile>

If you redirect the output, the GUI output is redirected to a log file. The processing results can then be analyzed later on.

Example

Sample file myFile.bap

```
DLG=PNR.MODIFY|PNR.PNR=1111111|PNR.KNR=1111|PNR.FIR=BSP|PNR.KST=costc_001|PNR.BER=Area57|PNR.EINTRITT=01/15/2019|PNR.PNAME=Miller|PNR.PVORNAME=Heinz|
DLG=PNR.MODIFY|PNR.PNR=12345678|PNR.KNR=001324|PNR.FIR=BSP|PNR.KST=B12_54|PNR.BER=Area17|PNR.EINTRITT=12/01/2017|PNR.PNAME=Maier|PNR.PVORNAME=Hans|
```

Request via command line

```
hydadm:2:E:\hydra2>hymw.exe -u999 -bmyFile.bap > myFile.log
hydadm:2:E:\hydra2>
```

Log file myFile.log

```
EXEC:DLG=PNR.MODIFY|PNR.PNR=1111111|PNR.KNR=1111|PNR.FIR=BSP|PNR.KST=costc_001|PNR.BER=Area57|PNR.EINTRITT=01/15/2019|PNR.PNAME=Miller|PNR.PVORNAME=Heinz|
RES: RET=0|KT=|LT=|RET=0|KT=|LT=|
EXEC:DLG=PNR.MODIFY|PNR.PNR=153443|PNR.KNR=001324|PNR.FIR=BSP|PNR.KST=B12_54|PNR.BER=Area17|PNR.EINTRITT=12/01/2017|PNR.PNAME=Maier|PNR.PVORNAME=Hans|
RES: RET=1703|KT=Invalid badge no.|LT=Invalid badge number 001324|
```

The first data record has been processed by the system without error ("RET=0"). The second data record produced an error (RET=1703). The following texts shortly describe the error.



To change the language of the error texts, set the environment variable HYLANG in the command line to "en" or "de" before you execute the command:

```
hydadm:2:E:\hydra2>set HYLANG=en
```

or

```
hydadm:2:E:\hydra2>set HYLANG=de
```

2.8.2 Definition for transferring data from SAP

The below structure has been designed to transfer HR master data from SAP in the HYDRA BAPI format using a customer-specific function module.

Message type:	ZHYDRA_PERSONS
IDoc type:	ZHYDRA_PERSONS01
Segments:	Z2BAPI000

NOTE

To generate segment names in HYDRA inbound processing as described above, the segments must have been created in SAP according to the pattern Z1<segment name>. The SAP outbound processing then generates versions using the segment names Z2<segment name><version>.

Example: **Z1BAPI** becomes **Z2BAPI000**

Field name	Type		Description	Example
Transaction	CHAR	20	Transaction ID (dialog ID in HYDRA)	PNR.MODIFY
Description	CHAR	40	Plain text designation as comment	Download HR master
Data	CHAR	940	Dialog data string for HYDRA	DLG=PNR.MODIFY PNR.PNR=12345678 PNR.KNR=00000001 Details see section 2.3.1

2.8.3 Transfer from other systems (file-based via MLE)

The communication between HYDRA and higher level systems generally depends on the technical configuration and capabilities of the corresponding system. HYDRA provides the RFC technology or the classic transfer option using ASCII files ("Text Files" = .txt files) for the communication (to and from HYDRA).

"IDOCs" combine data to logical units within one file. These IDOCs act like a "bracket" and combine logically similar data structures to transfer several of these "clusters" within one file. Although each IDOC corresponds to a defined data type/structure, the format does not depend on the content or the content type.

For details on the configuration of the interface, refer to the document "MES Weaver" (SIS-MWV_30.PDF).

Data is transferred using the following basic structure:

Field name	Type	Length	Designation (name)	Data field and meaning
SEGNAM*	Char	30	Segment	To this field, the writing system assigns the respective segment name. This segment name distinctly defines the structure of the data record (field SDATA). Example: Z2BAPI000
MANDT*	Char	3	Instance	Reserved; fixed: '000'
DOCNUM*	Char	16	IDoc number	Consecutive number for IDOCs Reserved: fixed '0000000000000000'
SEGNUM*	Char	6	Segment number	Reserved: fixed '000000'

Field name	Type	Length	Designation (name)	Data field and meaning
PSEGNUM	Char	6	Number of the parent segment	Reserved; fixed: '000000'
HLEVEL	Char	2	Hierarchy level	Reserved; fixed: '00'
SDATA	Char	1000	Payload	This field contains the actual data content/payload. The SEGNAM field specifies the structure of this field.

* = Key field

The below structure has been designed to transfer HR master data from other systems using the HYDRA file interface "File Port":

Message type / file name: ZHYDRA_PERSONS

Message function / file extension: .dat

Segments: Z2BAPI000

The segment Z2BAPI000 has the following structure:

Field name	Type		Description	Example
Transaction	CHAR	20	Transaction ID (dialog ID in HYDRA)	PNR.MODIFY
Description	CHAR	40	Plain text designation as comment	Download HR master
Data	CHAR	940	Dialog data string for HYDRA	DLG=PNR.MODIFY PNR.PNR=12345678 PNR.KNR=00000001 Details see section 2.3.1

3 Transferring Account Balances

A person's current account balances can be set using the PNRKTO.UPDATE dialog.

To perform account modifications, the following combination of values can be transferred:

Combination	Compensation in HYDRA	Logging (e.g. in the "Account journal" list)
New account balance	The actual current account balance will be set to the new account balance that was transferred.	The actual old account balance is revised by the difference made up of the new to the old balance.
Account modification	The actual current account balance is revised by the transferred account modification.	The actual account balance is revised by the transferred modification.
New and old account balance	The desired modification is derived from the difference between the transferred old and new account balance. The actual current account balance is revised by the calculated account modification.	The old transferred account balance is revised by the calculated modification. Please keep in mind that the transferred account balance may deviate from the actual account balance at the time of the modification.

The details about the account balances and the account modifications are provided in different formats and do not depend on the account type:

1. Time accounts

The values are transferred in seconds for time accounts. Example: To achieve an account modification of one hour, the value "|PNRKTO.KTODIFF=3600|" is transferred. If there are any decimal places, these are ignored.

2. Day accounts

For day accounts, the values are expected as decimal places. Example: To achieve an account modification to the leave account by four and a half days, the value "|PNRKTO.KTODIFF=4.5|" is transferred. If there are any decimal places, they are only considered allowing for the number of decimal places defined at the time the accounts were configured.

If the value is negative, a minus sign is placed in front of the number.

3.1 Parameters for transferring the balance accounts

In the "Must" column in the table shown below you will see IDs that show the fields where the dialogs are necessary:

U For UPDATE

The following parameters are available:

Dialog: PNRKTO.UPDATE				
Parameter	Type	Must	Content	Description
PNRKTO.FIR	C4		Company	Person's company
PNRKTO.PNR	N8	U	Personnel number	Person's personnel number
PNRKTO.KTO	N1	U	Account number (1 to 8)	Number of the account to be modified. The assignment is shown at the console when the PZE accounts are configured.
PNRKTO.KTODIFF	N9.3	see above	Account modification	
PNRKTO.KTOSTAND	N9.3	see above	Old account balance	
PNRKTO.KTOSTAND:Z	N9.3	see above	New account balance	

3.2 Data record as an example of an account modification

The following example reduces the account balance of the account with the number 4 (usually a leave account) by one day:

DLG=PNRKTO.UPDATE | PNRKTO.PNR=906000 | PNRKTO.KTO=4 | PNRKTO.KTODIFF=-1.0 |

4 Interface to Payroll Accounting Programs - Summary

Summary

Menu	Human Resource Management → Month-End Closing → Interface to Payroll Accounting
Transaction code	
Function authorization	

The module *Interface to payroll accounting* is used to transfer wage types cumulated across the settlement period to the wage and salary program. The information is written into an interface file in a predefined formation and it can then be imported into the settlement program.

Interface to payroll accounting

Main page Profile

Request data Cancel Print preview Print all Save wage type postings Save absences Save Help on operation Help on application Help on detail application Help

Selection

Person from ... to ...

Company ... Area ... Cost center ...

Year 2011 Settlement period 1 Date from 1/1/2011 to 1/31/2011

Wage type postings interface

```
[Allgemein]
Ziel=LODAS
BeraterNr=51437
MandantenNr=01
Feldtrennzeichen=|
Zahlenkomma=,
Datumsformat=TT.MM.JJJJ

[Satzbeschreibung]
1;u_lod_bwd_buchung_standard;pnr#bwd;abrechnung_zeitraum#bwd;bs_nr#bwd;la_eigene#bwd;bs_wert_butab#bwd;kostenstelle#bwd;
2;u_lod_bwd_fehlzeiten;pnr#bwd;datum_von_ttmmjjjj#bwd;datum_bis_ttmmjjjj#bwd;grund_fehlzeiten#bwd;

[Bewegungsdaten]
1;667;01.02.2011;01;100;-8,60;4712;
1;667;01.02.2011;01;100;-3,40;5133;
1;667;01.02.2011;01;100;5,00;5187;
1;667;01.02.2011;01;400;1,60;4712;
1;667;01.02.2011;01;400;2,40;5133;
1;667;01.02.2011;01;400;4,00;5187;
1;667;01.02.2011;01;450;3,20;4712;
1;667;01.02.2011;01;450;4,80;5133;
1;667;01.02.2011;01;450;8,00;5187;
1;667;01.02.2011;01;526;2,00;4712;
1;667;01.02.2011;01;526;3,00;5133;
1;667;01.02.2011;01;526;5,00;5187;
1;667;01.02.2011;01;600;3,20;4712;
```

Wage type postings interface Absence interface

Usage

In addition, the data can be displayed on the screen and printed out on a connected printer.

In addition to the *Wage type postings interface*, absences can also be displayed in the *Absence interface* tab when it is active.

Selection criteria

The following selection criteria are available in the application:

Year, settlement period

Settlement period for which the data is to be transferred

Toolbar



Save wage type postings

A Save as dialog opens for saving the wage type postings.



Save absences

A Save as dialog opens for saving the absences.

5 Blocking time and attendance data after end of month

When the interface file is created, the monthly events for the people concerned are marked as finished. The function authorization PZD (PZE temporary data access) can be used as a control mechanism for specific users to define that data can no longer be modified once the month has been settled. Here, the authorization level determines how many months the user is allowed access:

PZD function authorization	Meaning
<i>Does not exist</i>	<i>Unlimited access</i>
<i>Authorization level 1</i>	<i>Access to the current month</i>
<i>Authorization level 2</i>	<i>Access to the current and the previously completed month</i>
<i>Authorization level 3</i>	<i>Access to the current and the two previously completed months</i>
<i>...</i>	<i>...</i>

6 Interface configuration

To make settings for the interface to the payroll accounting, you must first create an entry in the INI configuration (System administration → System settings → Ini configuration):

Input:

Name	HYD-LUG
MOC user	0
Comment	Interface payroll accounting
Responsibility area	<empty>

6.1 General configuration of the interfaces

To configure the interface (System administration → System settings → INI data configuration) for the transfer of wage types, the keys mentioned below are available. Store the keys in the function "INI data configuration" as follows:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
WAGETYPES_DAILY	ON Upload/confirmation of daily wage types instead of monthly totals
WAGETYPES_ONCE	ON Compression to one record per wage type. If the compression is activated, the upload for the cost center is empty. You must not enable this option together with the daily upload of wage types (WAGETYPES_DAILY=ON).
MONTH	CURRENT / NEXT MONTH=CURRENT uploads the data for the current month (payroll month). MONTH=NEXT transfers the next month as upload date to the interface. The specification for this key depends on the set FORMAT. You should therefore set the key explicitly. See the rules to identify a date as described below.
DAY	FIRST / LAST If the upload date includes a day, then you transfer for DAY=FIRST the first day and for DAY=LAST the last day of the respective month. The specification for this key depends on the set FORMAT. You should therefore set the key explicitly. See the rules to identify a date as described below.
BALANCES_MONTH BALANCES_DAY	Optional and separate options to assign dates to wage types that are issued when transferring account balances. The valid values correspond to the options MONTH and DAY. If the options BALANCES_MONTH and BALANCES_DAY are not set, the values of the options MONTH and DAY are valid.
CONSIDER_LEAVING	ON/OFF

	If this option is enabled and the upload date is after the date of leaving of a person, the date of leaving is used instead of the upload date.
COSTCENTER	OFF The cost center is set to empty during upload. In combination with this option, it might be useful to set WAGETYPES_ONCE=ON in order to have only one entry per wage type if the duration of some wage types extends to several cost centers.
COSTCENTER	ON Use this key to activate the output of the cost center.

6.1.1 Calculation rules for MONTH=xxx and DAY=xxx

Please note that the configuration possibilities of the options MONTH= and DAY= are based on calendar months. If you disregard this fact, the configuration of payroll periods that are not calendar months can issue unexpected results.

The calculation is always based on the first day of the configured payroll period (base date).

With the setting "First day of payroll month", the base date is not changed.

Please note that not all interface formats transfer the day of the payroll date.

Setting	Calculation		
MONTH=	DAY=	Month or period	Day
CURRENT	FIRST	Month that includes the first day of the configured payroll period	Day of the first day of the configured payroll period
CURRENT	LAST	Month that includes the first day of the configured payroll period	Last day of the calendar month that includes the first day of the payroll period
NEXT	FIRST	Calendar month following the month that includes the first day of the payroll period.	First day of the calendar month following the month that includes the first day of the payroll period.
NEXT	LAST	Calendar month following the month that includes the first day of the payroll period.	Last day of the calendar month following the month that includes the first day of the payroll period.

Examples for the calculation of the payroll day:

Please note that not all interface formats transfer the day of the payroll date.

Setting		Configured payroll period	
MONTH=	DAY=	Calendar months: 01-DEC-2014 to 31-DEC-2014	Not regular: 24-NOV-2014 to 23-DEC-2014
CURRENT	FIRST	01-DEC-2014	24-NOV-2014 (base date, not changed)
CURRENT	LAST	31-DEC-2014	30-NOV-2014 (based on calendar month)
NEXT	FIRST	01-JAN-2015	01-DEC-2014 (based on calendar month)
NEXT	LAST	31-JAN-2015	31-DEC-2014 (based on calendar month)



If you set the payroll periods so that the accounting is made from mid-month to mid-month of the next month, then the period is divided into 2 payroll periods at the end of the year. In this case, both payroll periods have the same date in December for DAY=LAST. For MONTH=NEXT and DAY=FIRST, the two payroll periods in January have the same problem. To solve this problem, you must add an interface extension.

6.1.2 Configuration of the absence interface

The following keys are available to configure the interface for the transfer of absences.

Key	Value
FORMAT	The format is specified by the key of the monthly wage types. A manufacturer-specific format for the absence interface is only available for the formats DATEV, DATEV_COMFORT, KASPAR, LGVSOFT, LOGA, PAISY, PROLOHN, SAP45, SAP_IT2010, TOPAS and KDVLOHN_V2 (also new CSV format). The other formats issue the HYDRA standard format.
ABSENCES	ON Activation of the absence interface. The absence interface is only available for specific formats (this information is described for each interface in the section "Confirmation/upload of absences").
ABSENCES_SEPARATE_DAYS	ON If this option is enabled, the absences are uploaded as individual days and not as periods from...to.
ABSENCES_WEEKEND	OFF Usually, the absence period includes non-working days when it is uploaded. You can use the option ABSENCES_WEEKEND=OFF to disable this behavior.
ABSENCES_PARTIAL_DAYS	OFF/ONLY ABSENCES_PARTIAL_DAYS=OFF disables the upload of partial day absences. With ABSENCES_PARTIAL_DAYS=ONLY, only partial day absences are uploaded.
ABSENCES_ONLY_CONFIGURED	ON If this option is enabled, only the absences are

	uploaded that are included in the absence processing. This way, you can suppress unplanned absences or public holidays that are not identified as public holidays because of the shift type remuneration.
--	--

6.1.3 Set person-related options

You can make different configurations of the interface HYD-LUG for specific organization characteristics in the HR master data (e.g. per company). You distinguish between options that can be different for each person in the interface (**person-related** options) and options that must be identical for the entire interface file (**global** options).

In the configuration, the options that must be identical for the entire interface file (global option) can also be defined for the company of the HR master data. But in this case, the options are identified once in the interface on start of the interface run for the company of the first person and are then valid for all subsequent persons. The company is the only organization characteristic that is supported with global options.

The following **person-related** options are supported:

MONTH, BALANCES_MONTH, DAY, BALANCES_DAY, DATE, CUSTOMER, COMPANY, COMPANY_SALARIED_EMPLOYEES, COMPANY_NONSALARIED_EMPLOYEES, CONTRACT, CONSULTANT, COSTCENTER, WAGETYPES_DAILY, WAGETYPES_ONCE, ABREKZ, ROUND_MODE.

To make a deviating setting for a specific company, you can add an organization characteristic (=reference) and a value to the section "OPTIONS". Always use capital letters for the value. For example, OPTIONS_FIR_KUS defines the options of the company "KuS".

The following organization characteristics/references are possible for **person-related** options:

Reference	Explanation
FIR	Company from HR master data, value in capital letters!
BER	Area from HR master data, value in capital letters!
ABT	Department from HR master data, value in capital letters!
KST	Cost center from HR master data, value in capital letters!
PKREIS	Employee subgroup from HR master data, value in capital letters!
TAETIGKEIT	Activity from HR master data, value in capital letters!
BESCHVERH	Employment relationship from HR master data. Values: "A" and "G"

NSTMP	Option "Person does not clock" from HR master data. Values: "J" and "N"
-------	---

Example of a deviating setting of the person-related key CUSTOMER for the company "BSP":

The screenshot shows the 'INI data configuration' window. It has a top toolbar with icons for 'Request data', 'Cancel', 'Print preview', 'Print all', 'Insert', 'Edit', 'Delete', 'Save', and 'Help'. Below the toolbar is a 'Selection' section with input fields for 'Name' (HYD-LUG), 'MOC user', 'Section', 'Key', and 'Responsibility area'. The main area is divided into two panes. The left pane shows a table of configurations:

Name	Section	Key	Value	Active	Commentary
HYD-LUG	OPTIONS	CONSULTANT	1234	☒	Consultant number
HYD-LUG	OPTIONS	CUSTOMER	4711	☒	Client
HYD-LUG	OPTIONS	FORMAT	DATEV	☒	Interface in DATEV format
HYD-LUG	OPTIONS_FIR_...	CUSTOMER	4712	☒	Client for Company BSP

The right pane shows the 'INI configuration' details for the selected row (CUSTOMER, 4712). It includes fields for 'Section' (OPTIONS_FIR_KUS), 'Key' (CUSTOMER), 'Value' (4712), 'Active' (checked), and 'Commentary' (Client for Company BSP).

In this example, the deviating system number "4712" is entered for the company "BSP" in the interface.



You must only enter the deviating settings with person-related options. The other keys are taken over from the general configuration.

6.2 Configurations specific to interfaces

The section "Formats for the upload/confirmation to the payroll accounting" shows and explains the individual configurations that are specific to the interfaces. The respective subchapters give details on the individual payroll systems.

7 Formats used to Upload Data to Payroll Accounting

This document describes the formats that HYDRA supports for the different payroll accounting systems. The format is usually specified in the HYDRA configuration. This configuration is made by the person implementing the system or the HR consultant.

7.1 HYDRA standard format

The format outlined in this chapter is issued if the customer does not set up their own format. The HYDRA standard format contains the uploads for monthly wage types and absences.

7.1.1 Upload of monthly wage types

The entries in the following columns for **data type** have the following meaning:

Type	Description
Cx	Character field with length x; left-justified; missing digit is filled with blanks;
Nx.y	Numeric field of the length x and y decimal places. Example: 123 in the format N7.2: 0012300
" "	Constant value

The format has the following structure:

Field	Item	Type	Description
Record type	1	C3	Always "760"
Company	4	C3	Company from the HR master data
Area	7	C8	Area from the HR master data
Accounting year	15	N4	
Accounting month	19	N2	
Accounting number	21	C1	Always empty
Personnel number	22	C8	Left-aligned, filled with blanks
Last day evaluated	30	N2	Last day of the configured monthly period. Configuration of evaluation periods of the monthly evaluation in calendar months, e.g. "30" or "31".
Wage type	32	C4	Left-aligned, filled with blanks

			Wage type from HYDRA-PZE. Also a <i>Payment day type</i> can be entered here used in HYDRA for absence planning. You can differentiate whether this is a wage type or a payment day type using the assignment options for the fields <i>Hours to wage type</i>, <i>Full days absent</i> and <i>Partial days absent</i> described in more detail below: - If a value is only available in <i>Hours</i>, then it is a wage type. - If a value is only available in <i>full or partial days</i>, then it is a payment day type. - If a value is available in <i>Hours</i> and in <i>full or partial days</i>, then it is a wage type and a payment day type. In this case, the wage type of an absence is identical to the payment day type used for planning.
Algebraic sign	36	C1	For "Hours of a wage type", always use "+"
Hours of a wage type	37	N5.2	The two decimal places are stored in industrial minutes.
Full days of absence	42	N3	Number of days with a full day absence. In field Wage type, the number of the payment day type used is uploaded. If a wage type with the same number exists, a common data record is used for the transfer.
Partial days of absence	45	N3	Number of days with a partial absence. In field Wage type, the number of the payment day type used is uploaded. If a wage type with the same number exists, a common data record is used for the transfer.
Different wage group	48	C3	Always empty
Different hourly rate	51	N5	Always 0
Amount	56	N7	Always 0
Year of successive payment	63	N4	Always empty
Month of successive payment	67	N2	Always empty
Exec. cost center	69	C8	The person's regular cost center at the end of the accounting period
Debited Cost center	77	C8	Cost center of the daily wage type postings The sum total of the wage types is transferred separately for each cost center.

Order number	85	C10	Always empty
Work sequence	95	C4	Always empty
Comment	99	C18	Always empty
Reserved for incentive wage data	117	C25	Always empty
Document number	142	C5	Always empty
Administrative reference	147	C1	Always "1"

Example file

```

1      10      20      30      40      50      60      70      80      90      100      110      120      130      140      147
760BSPEREICH 199808.5001...31100.-13950000000...00000.....19980854310...54310.....1
760BSPEREICH 199808.5001...31100.+14050000000...00000.....54310...54310.....1
760BSPEREICH 199808.5001...31200.+005500000001...00000.....54310...42120.....1
760BSPEREICH 199808.5001...3130..+01600002000...00000.....54310...54310.....1
760BSPEREICH 199808.5002...31100.+19750000000...00000.....33570...33570.....1

```

The dots stand for blanks. Each data record consists of one row. The first rows are for orientation purposes in the data record.

7.1.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	XXXXXX
Value	XXXXXX
Active	☒

Key	Value
FORMAT	HYDRA
	Output format

7.1.2 Upload of absences

A separate interface file is provided for the absence times. This file is provided with the monthly wage types. It is stored on the HYDRA server in the HYDRA directory under the name "hyfehl.dat".

The interface is made available as an ASCII file. The interface has not column with. The separator between the columns is the semicolon. The file complies with the CSV format and can be easily imported into spreadsheets and other office applications.

The maximal length of the column can increase for future HYDRA versions.

Field	Type / Max. length	Comment
Company	C4	Company from the HR master data
Personnel number	N8	Without leading zeros
Start date	YYYYMMTT	First day of absence
End date	YYYYMMTT	Last day of absence
Reason	N4	Number of the payment day type of absence times
Short name	C6	Abbreviation of the remuneration day type for absence
Name	C40	Name of the remuneration day type for absence
Absence reason	C10	Reserved, always empty

Additional notes

- The absence periods are transferred as one data record including weekends and days off.
- If the absence period includes a change of month, the period is divided. This means: If the absences include several months, they are divided into several periods.
- If you have configured a period of continued pay in HYDRA (LFZ), the LFZ period is finished when the specified time has expired and a period with another absence reason is transferred.
- Using the *Control of absences*, you can control which absences are transferred.
- You can transfer full-day absences and partial absences.

7.2 Abacus

7.2.1 Upload of monthly wage types

When the monthly wage types are uploaded in abacus format, the columns are separated by commas and have no fixed width.

Example: „L001,99999,31/12/2010,1,201,,CHF,,87.1250,1,,,105,,,L001"

No.	Column	Contents
1	Identification	Fixed „L001“
2	Personnel number	Personnel number from HYDRA
3	Date	First day of the consecutive month in format DD/MM/YY
4	1 (consecutive number)	Average type from the wage type configuration
5	Wage type	Wage type from HYDRA
6	empty	empty
7	Currency	ISO code CHF
8	empty	empty
9	Hours	In decimal notation with period as decimal separator, with 4 decimal places.
10	1	Fixed „1“
11	empty	empty
12	empty	empty
13	Cost center	Cost center > of the wage type posting
14	empty	empty

15	empty	empty
16	Identification	Fixed „L001“

7.2.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	ABACUS
	Output format

7.3 Exakt LohnXL / XXL

This chapter outlines the upload process of monthly wage types to the payroll accounting system Exact LohnXL / XXL.

7.3.1 Upload of monthly wage types

Legend:

A(n) Alphanumeric, maximum with n digits

N(n) Numeric with digits

N(n,i) Numeric with n digits, of which i are decimal places. The dot is the decimal separator.

Total length of the field is then n+1.

Example: A field N(4,2) reads "03.21". This is the number 3,21.

K(n) Constant text of length n

Field name	Data type / format	Item	Contents	Example
Personnel number	N(6)	1	Personnel number with leading zeros	014234
Entry date	YYYYMMDD	7	First day of the consecutive month	19990901
Accounting date	YYYYMMDD	15	First day of the consecutive month	19990901
Wage type	A(3)	23	Wage type	"035"
Processing ID	K(2)	26	always "99"	"99"
Algebraic sign	K(1)	28	constant "+"	"+"
Einheit	N(11,3)	29	Duration of the wage type with 8 places before and 3 after the decimal point and a period as separator.	00000138.250
Record per entry	K(12)	41	constant "+00000000.00"	"00000000.00"
Amount	K(12)	53	constant "+00000000.00"	"00000000.00"
Cost center	A(8)	65	Cost center	"4711 "
Cost object	K(12)	73	constant " "	" "
Unit 2	K(13)	85	constant "+0000000.000"	"00000000.000"
Space bar	K(30)	98	constant " "	" "
Line feed	K(1)	128	constant line feed	

Note:

Wage types are alphanumeric in HYDRA and are transferred to the interface how they are created in HYDRA. If leading zeros are required before the wage type, the user has to enter these in HYDRA.

7.3.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	C wage Output format

7.4 CSS fixed wage

7.4.1 Upload of monthly wage types

Data set to transfer monthly wage types to the CSS fixed wage has to following structure:

Field name	Data type / format	Contents	Example
Company number	N(4)	Company number of the person	1111
Personnel number	N(5)	Personnel number from HYDRA. (The personnel number has 8 digits in HYDRA and only the last 5 digits are transferred.	12345
Period of accounting	DDMMYY Y	Accounting period = last of the month	2009-02-28
Wage type	N(4)	Wage type number	100
Record date of the document	DDMMYY Y	Record date of the document	2009-02-01
Valid from	DDMMYY Y	Reference <i>start of the the wage type</i>	2009-02-01
Valid until	DDMMYY Y	Reference <i>end of the wage type</i>	2009-02-28

Account no.	N(8)	Financial accounting /fixed "0"	0
Cost type	N(8)	Cost type / fixed "0"	0
Executing cost center	N(8)	Cost center of the person	48723
Cost center	N(8)	Cost center of the wage type postings	48723
Cost object	A(16)	Cost object / fixed „0“	0
OP 1	N(7,2)	Monthly sum total of time posted for the wage type.	128.00
OP 2	N(7,2)	Fixed "0.0"	0.0
OP 3	N(7,2)	Fixed "0.0"	0.0
OP 4	N(7,2)	Fixed "0.0"	0.0
OP 5	N(7,2)	Fixed "0.0"	0.0
RKZ	N(1)	Error ID / fixed "0"	0

The data record is finished via carriage return and linefeed (CRLF).

Example:

101^906000^2009-03-31^100^2009-02-01^2009-02-01^2009-02-28^0^0^	5187^	5187^0^3.00^0.0^0.0^0.0^0^0^
101^906000^2009-03-31^142^2009-02-01^2009-02-01^2009-02-28^0^0^	5187^	5187^0^2.00^0.0^0.0^0.0^0^0^
101^906000^2009-03-31^470^2009-02-01^2009-02-01^2009-02-28^0^0^	5187^	5187^0^4.00^0.0^0.0^0.0^0^0^

7.4.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	CSSFIX Output format

7.5 DATEV (LODAS)

The header interface provides the following information:

```
[General]
Target=LODAS (target)
ConsultantNo=<xxx> (tax consultant)
ClientNo=<xxx> (client)
Field separator=; (field separator)
Number comma=, (number separator)
Date format=DD. MM.YYYY (date format)

Record description]1
1;u_lod_bwd_buchung_standard;pnr#bwd;abrechnung_zeitraum#bwd;la_eigene#bwd;bs_wert_bu
tab#bwd;bs_nr#bwd;kostenstelle#bwd;
```

You can set the tax consultant number and the client number per customer via the HYDRA configurator.

Legend:

A(n) Alphanumeric, maximum with n digits

N(n) Numeric with digits

N(n,i) Numeric with n digits, of which i are decimal places Example A field N(4,2) contains "13,21". This is the number 13,21.

K constant text

7.5.1 Upload of monthly wage types

The monthly wage types are uploaded with the following format:

Field name	Data type / format	Contents	Example
Record type	N (=night)	Number of the record type in relation to the formats in the [Record Description] section	1

Table name	K	For monthly wage types constant "u_lod_bwd_buchung_standard"	"u_lod..."
Personnel number	N(5)	Personnel number (max. 5 digits, if the personnel number are greater, then the last 5 digits are transferred).	41
Accounting time	DDMMYYYY	Accounting month date	2007-12-01
Processing key	N(2)	The processing key can be set in the configuration of wage types in the control identifier field with 'BS' in the front (e.g. BS02, available from hylobu version 8.1.1.212). The specification is 01 = hours	01
Wage type	N(3)	The wage type must be numeric and can have a maximum of 3 digits.	"100"
Value	N(11,2)	Duration of the wage type with 2 decimal numbers	173.75
Cost center	A(8)	Cost center (max. 8 digits)	"415687"

The data is in the section [transaction data]. The different fields are separated by a semicolon (;). This separator also appears at the end of the row.

Example:

```
[transaction data]
1;96665;01.01.2008;01;100;85,90;5187;
1;96665;01.01.2008;01;450;80,00;5187;
1;96665;01.01.2008;01;526;11,00;5187;
1;96665;01.01.2008;01;600;8,00;5187;
```

7.5.1.1 Interface configuration

The interface format is then enabled via INi data configuration (System administration → System settings → INi data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	DATEV Output format
CUSTOMER or COMPANY or COMPANY_NONSALARIED_EMPLOYEES and COMPANY_SALARIED_EMPLOYEES	For DATEV formats, the client to be transferred must be set using this key.
CONTRACT or CONSULTANT	With FORMAT=DATEV, the tax consultant number that must be transferred must be set via this key.
LEAVE_DAYS	The number of holidays is confirmed using the wage type set here. In the case of DATEV, the entry LEAVE_DAYS=BS71 causes the holidays to be transferred without a wage type with processing key 71.
ILLNESS_DAYS	The number of sick days is determined by the number set here. In the case of DATEV, the entry ILLNESS_DAYS=BS72 causes the sick days to be transferred without a wage type with the processing key 72. Whole and half days of absence are uploaded, whereby an absence of 3.5 hours or more counts as half a day. Illness is interpreted as all absences that are assigned to one of the two categories LFZ (sickness with continued pay) or LFZ (sickness without continued pay) when processing the absences.
ROUND_MODE	If you use interfaces FORMAT= DATEV the hours are rounded commercially. If required, you can enable the option ROUND_MODE=FLOOR to cut off the decimal places of the hours of a wage type (cut off =

	round down).
--	--------------

7.5.2 Upload of absences

The following fields are transferred with the absence times:

Field name	Data type / format	Contents	Example
Record type	N (=night)	Number of the record type in relation to the formats in the [Record Description] section	2
Table name	K	For absences constant "u_lod_bwd_fehlzeiten"	"u_lod..."
Personnel number	N(5)	Personnel number (max. 5 digits, if the personnel number are greater, then the last 5 digits are transferred).	41
Date from	DDMMYYYY	Start date of the absence	2007-12-14
Date to	DDMMYYYY	End date of the absence	2007-12-17
Reason	N(3)	Absence reason (number of the payed leave, may. 3 digits)	450

There is a separate entry with record type 2 for absences in the section [Record description].

The data is in the section [transaction data]. The different fields are separated by a semicolon (;). This separator also appears at the end of the row.

Example:

<pre>[record description] 2;u_lod_bwd_fehlzeiten;pnr#bwd;datum_von_ttmjjjj#bwd;datum_bis_ttmjjjj#bwd;grund_fehlzeiten#bwd; [Bewegungsdaten] 2;96665;01.01.2008;01.01.2008;600; 2;96665;07.01.2008;11.01.2008;450; 2;96665;14.01.2008;18.01.2008;450;</pre>

7.5.2.1 Interface configuration

Key	Value
FORMAT	DATEV The key of the monthly wage types also specifies the format. A manufacturer-specific format for the absence interface is only available for the format DATEV_COMFORT. The other formats issue the HYDRA standard format.
ABSENCES_SEPARATE_FILE	ON In case of the DATEV format, the absences are written in the same file as the wage types. You can use this option to specify that also with these formats the absences are written in a separate file using the name <i>hyfehl.dat</i> .

7.6 DATEV comfort

When the "DATEV Lohn und Gehalt Comfort" interface is called up, 2 files are written to the Hydra system directory on the shop floor scheduling. In addition to the file with the wage type postings, an INI file with the format description is created. The interface files are text files containing one record per row:

datev_comfort.ini

INI file with format descriptions for importing time management data.

hylobu.dat

Interface file to transfer the wage types. The file contains contains coummulated data for one calendar month and for each person.

7.6.1 Upload of monthly wage types

There are the following formats for the separate field types:

A(n) Alphanumeric, with n digits

N(n) Numeric with n digits

N(n,i) Numeric with n digits, of which i are decimal places

Example A field N(7,2) contains "3,21".

7.6.2 Datev_comfort.ini

INI file with format descriptions for importing time management data.

[General]

Field number = 11

Field separator = semicolon

Record separator = enter/return

Number separator = ,

Date separator = /

[Field content]

Field1 = Personnel number

Field2 = Calendar day

Field3 = Downtime key

Field4 = Wage type numbers

Field5 = Number of hours

Field6 = Number of days

Field7 = Value

Field8 = Deviating factor

Field9 = Deviating wage change

Field10 = Cost center number

Field11 = Cost object

7.6.3 hylobu.dat

Only postings for monthly data entry are output - for this reason the fields "Downtime key", "Calendar day", "Number of hours" and "Number of days" are empty.

The Datev interface has separated fields due to the semicolon.

The file contains a header line so that the time management data of several clients and different accounting months can be recognized in a tax office:

Field	Type	Meaning
Tax consultant number	N7	Unique identifier for a tax consultant, value range from 1000 to 9999999
Client number	N5	Unique identifier of a client in a tax office, value range from 1 to 99999
Accounting date	C7	Month and year for which transaction data is provided. Format: MM/YYYY

Data format of the wage transaction data

Field	Type	Meaning
Personnel number	N5	Unique indicator for an employee of a client, value range from 1 to 99999. HYDRA possible transfers the last five digits.
Calendar day	N2	Must remain empty to collect the month.
Downtime key	C2	Must remain empty to collect the month.
Wage type	N4	Wage type from HYDRA The Datev value range is from 1 to 5999 and from 9000 to 9999. The value range must be included in the configuration of wage types.
Number of hours	N (=night)	Must remain empty to collect the month.
Number of days	N (=night)	Must remain empty to collect the month.
Value	N5.2	Duration of the wage type The last two digits are decimal places. Example: 30 hours and 45 minutes result in a field content of "+030.75".
Deviating factor	N5.2	Empty
Deviating wage changes	N5.2	Empty
Cost center number	C8	Assignment of cost center for posting
Cost object	C8	Empty

Note: Errors in DATEV

If the maximum field length is exceeded or if the contents of mandatory fields are incorrect, the incorrect data records are not read in Datev. The relevant place in the file is output as row (and column) number in a log record in Datev. Data records with correct format, but incorrect contents are read and can be displayed and corrected in a dialog in Datev.

7.6.4 Example file

```
253154;1000;01/2009
9;;;1000;;;150.00;;;5187;
9;;;1100;;;2.00;;;4711;
9;;;41;;;13.50;;;4711;
9;;;450;;;4.00;;;5187;
9;;;51;;;0.08;;;4711;
9;;;600;;;16.00;;;5187;
```

7.6.4.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	DATEV_COMFORT Output format
CUSTOMER or COMPANY or COMPANY_NONSALARIED_EMPLOYEES and COMPANY_SALARIED_EMPLOYEES	For DATEV formats, the client to be transferred must be set using this key.
CONTRACT or CONSULTANT	With FORMAT=DATEV, the tax consultant number that must be transferred must be set via this key.
ROUND_MODE	If using the interface FORMAT=DATEV_COMFORT, the hours are rounded (arithmetic rounding). If required, you can enable the option ROUND_MODE=FLOOR to cut off the decimal places of the hours of a wage type (cut off = round down).

7.6.4.2 Interface configuration

Key	Value
FORMAT	DATEV_COMFORT The key of the monthly wage types also specifies the format. A manufacturer-specific format for the absence interface is only available for the format DATEV_COMFORT. The other formats issue the HYDRA standard format.
ABSENCES_SEPARATE_DAYS	ON If this option is enabled, the absences are uploaded as separate days and not as periods from...to. If the absences are transferred in the format PROLOHN and DATEV_COMFORT, this

	option must be enabled because the interface format only provides a date field.
--	---

7.7 eGecko (CSS)

eGecko is the follow-up product of CSS Fixlohn. The interfaces are similar.

The different fields are separated by a semicolon (;). The data record is finished via carriage return and linefeed (CRLF).

Important:

To separate fields, HYDRA uses the semicolon (;), which is different to the standard settings of eGecko. In eGecko, you must therefore change the default field separator circumflex (^) to a semicolon in the interface import settings.

To encode characters, HYDRA uses UTF-8 without BOM. You can configure the character encoding in the eGecko interface program. Here, the default is CP1252 (Windows-1252).

7.7.1 Upload of monthly wage types

Column P – Mandatory field Y (yes) / N (no)

The data record to transfer monthly wage types to eGecko has the following structure:

Field / attribute	Type	P	Description	Example
FIRMANR	String	N (=nicht)	HYDRA's company number of the person	BSP
MITARBEITERNR (employee number)	String	J	Personnel number from HYDRA	12345
APER	String	J	Date of accounting period DD.MM.YYYY The contents can be configured in HYDRA. By default, it is the first day of the consecutive month.	2012-02-01
LOHNARTNR (wage type number)	String	J	Wage type number	100
DATE	Date	J	Document date DD.MM.YYYY. Last day of the accounting month	2012-01-31
Date from	Date	N (=nicht)	Date from. The date must be included in the month/year of APER. Is not filled by HYDRA.	<empty>

Date to	Date	N (=n igh t)	Date to. The date must be included in the month/year of APER. Is not filled by HYDRA.	<empty>
PLATZHALTER (placeholder)	String	N (=n igh t)	Is ignored	<empty>
KOSTENART (wage type)	String	N (=n igh t)	Empty	<empty>
PLATZHALTER (placeholder)	String	N (=n igh t)	Is ignored	<empty>
KOSTENSTELLE (cost center)	String	N (=n igh t)	Cost center of the wage type postings	48723
KOSTENTRAEGER (cost object)	String	N (=n igh t)	Cost object	<empty>
PARAMETER1	Decimal	J	Monthly sum total of time posted for the wage type.	128.75
PARAMETER2	Decimal	N (=n igh t)	Parameter 2 of the wage type	<empty>
PARAMETER3	Decimal	N (=n igh t)	Parameter 3 of the wage type	<empty>
PARAMETER4	Decimal	N (=n igh t)	Parameter 4 of the wage type	<empty>
PARAMETER5	Decimal	N (=n igh t)	Parameter 5 of the wage type	<empty>
HKZ	Decimal	N (=n igh t)	Not used	<empty>

Example:

```
001;1006;2016-02-01;099;2016-01-31;;;;;419012;;133.20;;;;;
001;1006;2016-02-01;101;2016-01-31;;;;;419012;;133.20;;;;;
001;1006;2016-02-01;221;2016-01-31;;;;;419012;;37.00;;;;;
001;1006;2016-02-01;223;2016-01-31;;;;;419012;;7.40;;;;;
001;1006;2016-02-01;330;2016-01-31;;;;;419012;;7.40;;;;;
001;1006;2016-02-01;331;2016-01-31;;;;;419012;;14.80;;;;;
001;1007;2016-02-01;330;2016-01-31;;;;;419072;;7.40;;;;;
001;1007;2016-02-01;331;2016-01-31;;;;;419072;;148.00;;;;;
```

```
001;1008;2016-02-01;093;2016-01-31;;;;;7000;;148.00;;;;;
001;1008;2016-02-01;101;2016-01-31;;;;;7000;;148.00;;;;;
001;1008;2016-02-01;330;2016-01-31;;;;;7000;;7.40;;;;;
001;1015;2016-02-01;099;2016-01-31;;;;;419011;;140.60;;;;;
001;1015;2016-02-01;101;2016-01-31;;;;;419011;;140.60;;;;;
001;1015;2016-02-01;221;2016-01-31;;;;;419011;;37.00;;;;;
001;1015;2016-02-01;223;2016-01-31;;;;;419011;;7.40;;;;;
001;1015;2016-02-01;234;2016-01-31;;;;;419011;;7.40;;;;;
001;1015;2016-02-01;330;2016-01-31;;;;;419011;;7.40;;;;;
001;1021;2016-02-01;099;2016-01-31;;;;;419011;;148.00;;;;;
001;1021;2016-02-01;101;2016-01-31;;;;;419011;;148.00;;;;;
001;1021;2016-02-01;221;2016-01-31;;;;;419011;;74.00;;;;;
001;1021;2016-02-01;330;2016-01-31;;;;;419011;;7.40;;;;;
001;1022;2016-02-01;099;2016-01-31;;;;;419098;;133.20;;;;;
```

7.7.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	C wage Output format
ABSENCES	ON
MONTH	CURRENT
DAY	LAST

7.7.2 Upload of absences

Column P – Mandatory field Y (yes) / N (no)

HYDRA does not support to cancel data records.

The data record to transfer absences to eGecko has the following structure:

Field / attribute	Type	P	Description	Example
MITARBEITERNR (employee number)	String	J	Personnel number from HYDRA	12345
ZEITART (time type)	String	J	Absence reason. Number of the payment day type or absence reason defined in the Control of absences for the payroll accounting.	URL

VONDATUM (date from)	Date	J	Date from DD.MM.YYYY	2016-02-15
VONDATUM (date to)	Date	J	Date to DD.MM.YYYY	2016-02-29
STORNO (cancellation record)	String	N (=n ight)	Is left empty by HYDRA. (D is reserved for cancellations).	

Additional notes

- The absence periods are transferred as one data record including weekends and days off.
- If the absence period includes a change of month, the period is divided. This means: If the absences include several months, they are divided into several periods.
- If you have configured a period of continued pay in HYDRA (LFZ), the LFZ period is finished when the specified time has expired and a period with another absence reason is transferred.
- Using the *Control of absences*, you can control which absences are transferred.
- You can transfer full-day absences and partial absences.

Example:

```
1006;LFZ krank;28.01.2016;31.01.2016;;
1007;LFZ krank;04.01.2016;08.01.2016;;
1007;LFZ krank;09.01.2016;22.01.2016;;
1007;LFZ krank;25.01.2016;29.01.2016;;
1015;234;2016-01-15;2016-01-15;;
1022;700;2016-01-25;2016-01-25;;
1031;LFZ krank;18.01.2016;22.01.2016;;
1033;700;2016-01-25;2016-01-25;;
1042;Krankengel;01.01.2016;08.01.2016;;
1042;Krankengel;09.01.2016;15.01.2016;;
1042;Krankengel;16.01.2016;25.01.2016;;
```

7.8 FOSS-Lohn (ORDAT)

7.8.1 Upload of monthly wage types

The interface for transferring monthly wage types to FOSS Lohn (wage accounting system) from ORDAT contains fields with a fixed record length. For each person, one header record and one or more data records are written to the interface file.

There are the following formats for the separate field types:

- <x>n:
Numeric- with leading zeros
- <x>a:
Alphanumeric x-digits followed by a space.

Note:

When using this interface, only numeric companies, cost centers and wage types are allowed in HYDRA.

The header record has the following structure:

Field name	Data typ/ format	Contents	Example
Record type	2a	constant "SE"	SE
Company number	6n	Company number with leading zeros (the company number has four digits in HYDRA).	000100
Filler	17n	constant 17 zeros	0000000000000000000
Company number	6n	Company number with leading zeros (the company number has four digits in HYDRA).	000100
Filler	1a	constant 1 space	" "
Filler	1n	constant 0	0
Filler	4n	constant 9999	9999
Filler	4n	constant 0000	0000
Filler	2n	constant 11	11
Filler	1n	constant 4	4
Filler	6n	constant 000000	000000
Month	2n	Payroll month	07
Year	2n	Payroll year (two digits)	00

Filler	4n	constant 0000	0000
--------	----	---------------	------

The data record has the following structure:

Field name	Data type/ format	Contents	Example
Record type	2a	constant "S5"	S5
Company number	6n	Company number with leading zeros (the company number has four digits in HYDRA).	000100
Filler	5n	constant 00000	00000
Filler	2n	constant 00	00
Change field	8n	Deviating hour record constant 00000000	00000000
Decimal value / hours	8n	Duration of the wage type in decimal hours with two decimal places.	00003250
Algebraic sign	1a	constant 1 space	" "
Wage type	5n	Wage type with leading zeros (the wage type has 4 characters in HYDRA)	01100
Cost center	8n	Cost center with leading zeros	00234511
Personnel number	5n	Personnel number (The personnel number has 8 digits in HYDRA. The last five digits of the personnel are transferred). HYDRA possible transfers the last five digits.	08142
Date from	4n	constant 0000	0000
Date to	4n	constant 0000	0000

7.8.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	FOSS Output format
ROUND_MODE	With the interface FORMAT= FOSS, the hours are rounded (arithmetic rounding). If required, you can enable the option ROUND_MODE=FLOOR to cut off the decimal places of the hours of a wage type (cut off = round down).

7.9 GENERIC

7.9.1 Upload of monthly wage types

Available as of hylobu version 8.1.1.220.

This format is a generic standard format in the HYDRA PDM list format. A large number of data columns are output, which can be provided by HYDRA PZW.

The primary purpose of this format is used by MPDV as a starting point for further processing of customizations. However, this format can also be used by customers for further processing by customer-specific software or payroll accounting programs.

The file consists of a header line with column names and the following data rows:

The columns have no specific width and separator is the pipe "|". Date fields are in the format: MM/DD/YYYY. Decimal separator for floating point numbers is the point. The maximal length of the column can increase for future HYDRA versions.

Note: The order is not fixed. MPDV can at all times enter additional columns or change the order. Therefore, bear in mind the header row when evaluating data.

Field	Type	Contents
-------	------	----------

PNR	N (=night)	HR master data: pesonnel number
PNAME	A	HR master data: last name
PVORNAME	A	HR master data: first name of a person
PVORNAME_2	A	HR master data: middle name of the person
PFIR	A	HR master data: company
PBER	A	HR master data: area
PKST	A	HR master data: cost center
PABT	A	HR master data: department
PKREIS	A	HR master data: employee subgroup
Entry	D	Master data: date of entry
Leaving	D	HR master data: leaving date
BESCHVERH	A	HR master data: employment relationship
GEBDAT	D	HR master data: date of birth
INFOTXT_1	A	HR master data: free configurable info field from the HR master data
INFOTXT_2	A	HR master data: free configurable info field from the HR master data
INFOTXT_3	A	HR master data: free configurable info field from the HR master data
INFOTXT_4	A	HR master data: free configurable info field from the HR master data
INFOTXT_5	A	HR master data: free configurable info field from the HR master data
INFOTXT_6	A	HR master data: free configurable info field from the HR master data
INFOTXT_7	A	HR master data: free configurable info field from the HR master data
INFOTXT_8	A	HR master data: free configurable info field from the HR master data
INFOTXT_9	A	HR master data: free configurable info field from the HR master data
INFOTXT_10	A	HR master data: free configurable info field from the HR master data
INFOTXT_11	A	HR master data: free configurable info field from the HR master data
INFOTXT_12	A	HR master data: free configurable info field from the HR master data
INFOTXT_13	A	HR master data: free configurable info field from the HR master data
INFOTXT_14	A	HR master data: free configurable info field from the HR master data
INFOTXT_15	A	HR master data: free configurable info field from the HR master data
INFOTXT_16	A	HR master data: free configurable info field from the HR master data
INFOTXT_17	A	HR master data: free configurable info field from the HR master data
INFOTXT_18	A	HR master data: free configurable info field from the HR master data
INFOTXT_19	A	HR master data: free configurable info field from the HR master data
INFOTXT_20	A	HR master data: free configurable info field from the HR master data
INFOWERT_1	N (=night)	HR master data: free configurable info field from the HR master data
INFOWERT_2	N (=night)	HR master data: free configurable info field from the HR master data

INFOWERT_3	N (=night)	HR master data: free configurable info field from the HR master data
INFOWERT_4	N (=night)	HR master data: free configurable info field from the HR master data
INFOWERT_5	N (=night)	HR master data: free configurable info field from the HR master data
INFODAT_1	D	HR master data: free configurable info field from the HR master data
INFODAT_2	D	HR master data: free configurable info field from the HR master data
INFODAT_3	D	HR master data: free configurable info field from the HR master data
INFODAT_4	D	HR master data: free configurable info field from the HR master data
INFODAT_5	D	HR master data: free configurable info field from the HR master data
LART	A	Wage type from HYDRA-PZE. Also a <i>Payment day type</i> can be entered here that is used in HYDRA for absence planning. You can differentiate between a wage type and a remuneration day type by referring to the fields TERM_ANW, TERM_FEAR, FEARDAYS and PARTIAL_FEARDAYS described below: - If there is only a value in <i>DAUER_ANW</i> und <i>DAUER_FEHL</i> , then it is a wage type. - If a value is only available in <i>full</i> or <i>half days</i>, then it is a payment day type. - If a value exists in <i>DURATION_ANW</i>, <i>DURATION_FEHL</i> as well as in the <i>full</i> or <i>half days</i>, then it is both a wage type and a remuneration day type. In this case, the wage type of an absence is identical to the payment day type used for planning.
LGRP	A	Wage group (not used in the standard)
KST	A	Cost center
DAUER_ANW	N (=night)	Duration from attendance times in seconds
DAUER_FEHL	N (=night)	Duration from absences in seconds
ZEITGRAD	N (=night)	Performance efficiency rate multiplied by factor 1000 (not used in the standard system)
FEHLTAGE	N (=night)	Number of days with a full day absence. In field Wage type, the number of the payment day type used is uploaded. If a wage type with the same number exists, a common data record is used for the transfer.
TEILFEHLTAGE	N (=night)	Number of days with a partial absence. In field Wage type, the number of the payment day type used is uploaded. If a wage type with the same number exists, a common data record is used for the transfer.
DAT_VON	D	Start date of the accounting period
DAT_BIS	D	Last date of the accounting period
LOHNSATZ	N (=night)	Wage record (constant 0 in the standard)
LOHNBETRAG	N (=night)	Wage amount (0 constant in the standard)
DATE	D	Posting date of the data Default is the start of the accounting period
LART_AVGART	A	Average type from the wage type master data

Example file

Page 62 of 129

7.9.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
 Section OPTIONS
 Key xxxxxx
 Value xxxxxx
 Active ☒

Key	Value
FORMAT	GENERIC
	Output format

7.9.2 Upload of absences

Available as of hylobu version 8.1.1.220.

A separate interface file is provided for the absence times. This file is provided with the monthly wage types. It is stored on the HYDRA server in the HYDRA directory under the name "hyfehl.dat".

The interface is made available as an ASCII file. This format is a generic standard format in the HYDRA PDM list format.

The file consists of a header row with column names and the following data rows:

The columns have no specific width and separator is the pipe "|". Date fields are in the format: MM/DD/YYYY. Decimal separator for floating point numbers is the point. The maximal length of the column can increase for future HYDRA versions.

Note: The order is not fixed. MPDV can at all times enter additional columns or change the order. Therefore, bear in mind the header row when evaluating data.

Field	Type / Max. length	Comment
FIR	A	Company from the HR master data
PNR	N (=night)	Personnel number without leading zeros
DATB	D	First day of absence

DATE	D	Last day of absence
GRUND	N (=night)	Number of the payment day type of absence times
BEZK	A	Abbreviation of the remuneration day type for absence
BEZAUSF	A	Name of the remuneration day type for absence

Additional notes

- The absence periods are transferred as one data record including weekends and days off.
- If the absence period includes a change of month, the period is divided. This means: If the absences include several months, they are divided into several periods.
- If you have configured a period of continued pay in HYDRA (LFZ), the LFZ period is finished when the specified time has expired and a period with another absence reason is transferred.
- The *Processing of absence times* can be used to control which absence times are transferred.
- You can transfer full-day absences and partial absences.

7.10 HANSALOG (record type V1)

7.10.1 Upload of monthly wage types

Uploading the monthly wage types is performed with the following data record structure:

Field	Type	Position	Max. length	Decimal places	Contents
Record type	alpha	1	2		V1
Company	num	3	3		HYDRA company, the first 3 digits
Personnel number	num	6	5		HYDRA personnel number
Accounting key	num	11	1		0 (zero)
Monat	num	12	2		Monat
Wage type	num	14	3		HYDRA wage type (converted to three numeric digits)
Time	num	17	6	2	HHHHII
Factor	num	23	5	2	Empty (blanks)

Amount	num	28	8	2	Empty (blanks)
Percentage	num	36	5	2	Empty (blanks)
Cost center	num	41	6		Cost center wage type posting
Cost object	num	47	6		HR master data cost center
Free field 1	alpha	53	38		blanks
Accounting year	num	91	4		Year
Free field 2	alpha	95	34		blanks

The total record length is 128 characters. Numeric fields are transferred with leading zeros.

Negative content only exists for the fields Time and Amount. In this case, the first character in the field is not a leading zero, but a minus sign.

7.10.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	HANSALOG
	Output format

7.11 HANSALOG (record type V3)

7.11.1 Upload of monthly wage types

The wage type totals determined at the end of the month are transferred to Hansalog Payroll Accounting via V3 records (and imported there as file LGT.BEWEG). When the interface file is created, the file is stored in the HYDRA directory of the HYDRA shop floor scheduling with the name "hylobu.dat".

Field	Type	Item	Contents
Record type	C2	1	V3

System	N2	3	00 constant
Company	N3	5	HYDRA company number
Personnel number	N10	8	Personnel number
Accounting key	N1	18	Constant 0. (0: for running month, 3 for previous month)
Accounting date	N6	19	YYYYMM from the start of the accounting period
Wage type	N4	25	HYDRA wage type
Time	N 8.2	29	Time for the wage type in the format HHHHHHII
Factor	N 5.2	37	Empty
Amount	N 9.2	42	Empty
Percentage	N 5.2	51	Empty
Cost center	N 12 or C 12	56	HYDRA cost center
Cost object	N12	68	Empty
Internal field 1	C72	80	Empty
Created date	N8	152	YYYYMMDD of the interface run
Created system	C8	160	"HYDRA P" for data from PZE („HYDRA L" for data from LLE)
User	C8	168	HYDRA
Internal field 2	C25	176	Empty

The total length that can be used is 200 byte.

Numeric fields can be set blank or 0 if not needed. At least one of the fields time, factor, amount or percentage must be filled.

The cost center in Hansalog can only be administered numeric or alphanumeric.

The fields creation date, creation system, creation user can be used in Hansalog to delete the transferred data.

If there is a negative numeric value, the minus is put in front instead of a leading zero. That means the field length is shorter.

Example:

```

V300 0      90200701 100  93.00      123
V300 0      90200701 400   8.00      105
V300 0      90200701 400  80.00      123
V300 0      90200701 888  24.00      123
V300 0      100200701 100  24.00      123

```

```

20070202 HYDRA PHYDRA
20070202 HYDRA PHYDRA
20070202 HYDRA PHYDRA
20070202 HYDRA PHYDRA
20070202 HYDRA PHYDRA

```

V300 0 100200701 410 160,00
V300 0 100200701 888 6,00

123
123

20070202 HYDRA PHYDRA
20070202 HYDRA PHYDRA

7.11.1.1 Interface configuration of the monthly wage types

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	HANSALOG_V3 Output format
CUSTOMER or COMPANY or COMPANY_NONSALARIED_EMPLOYEES and COMPANY_SALARIED_EMPLOYEES	With the formats HANSALOG_V3, you can use these options to specify the company.
ABREKZ	With FORMAT= HANSALOG_V3, you can use these options to specify the accounting key.

7.12 INTEGRA

7.12.1 Upload of monthly wage types

The interface to transfer the monthly wage types have the following format:

Field name	Position	Data typ/ format	Contents	Example
FIRMENNR	1	C(4)	Company	TER
ABRJAHR	5	C(4)	Payroll year	2005
ABRMONAT	9	C(2)	Accounting month	06
PERSNR	11	N(6)	Personnel number	142356
SATZART	17	C(1)	constant 1	1
LANR	18	C(3)	Wage type	100

LFDNR	21	N(4)	Always 0	0000
STDTAGE	25	N(10,2)	Duration (10 digits with 2 decimal places)	00000058.23
FAKTOR	35	C(10)	Constant empty	
PROZENT (percentage)	45	C(10)	Constant empty	
BETRAG (amount)	55	C(10)	Constant empty	
KST	65	C(10)	Cost center	22-105
KTR	75	C(10)	Constant empty	
PROJEKT	85	C(10)	Constant empty	
TAG	30	C(2)	Constant empty	
VERARBKZ	32	C(1)	Processing ID 0 = new	0
FREE	35	C(21)	Reserve	

At the end of each row is CR/LF

Example:

001 200503000002110000000000107.33	0	0
001 200503000002110100000000038.75	0	0
001 200503000002120000000000000.33	0	0
001 200503000002120500000000009.58	0	0
001 200503000002130100000000010.00	0	0
BSP 200503000009110000000000013.00	22-1	0
BSP 200503000009141000000000004.00	22-1	0
BSP 200503000009157500000000008.00	22-1	0

7.12.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	INTEGRA
	Output format

7.13 KASPAR

7.13.1 Upload of monthly wage types

To upload the monthly wage types, the semicolon ";" is used as column separator.

Data types:

Type	Meaning	Formatting
Cn	Character (string, text)	with max. length n
Nn	Integer	The maximum number of digits n. Negative values are preceded by the sign "-".
Nx.y	Decimal number	with "." (Point) as decimal separator and maximum x total digits and y decimal places. Negative values are preceded by the sign "-".

Structure:

Field/meaning	Column name	Data type
Customer number (Fix)	Kundennr	C5
Personnel number (with leading zeros)	Pnr	C7
Year (YYYY)	Jahr	C4
Month (MM)	Monat	C2
Wage type (with leading zeros)	Lohnartenschlüssel	C4
Hours (or day) for wage type	Einheit	N8.2
Temporary field (fixed value 0)	Temp1	C15
Start date absence (YYYYMMDD)	Startdatum	C8
End date of absence (YYYYMMDD)	Endedatum	C8
Temporary field (fixed value 0)	Temp2	C15
Temporary field (fixed value 0)	Temp3	C1

At the end of each row is CR/LF

Example:

00519;0000061;2004;08;0001;	168.00;	0;	;	;	0;0
00519;0000061;2004;08;0199;	16.00;	0;20040826;20040827;			0;0

7.13.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	KASPAR Output format

7.13.1.2 Interface configuration

Key	Value
FORMAT	INTEGRA The key of the monthly wage types also specifies the format. A manufacturer-specific format for the absence interface is only available for the formats KASPAR. The other formats issue the HYDRA standard format.
ABSENCES_SEPARATE_FILE	ON With the formats KASPAR, the absences are written in the same file as the wage types. You can use this option to specify that also with these formats the absences are written in a separate file using the name <i>hyfehl.dat</i> .

7.14 KDVLOHN_V2 (Kanne, new format CSV file)

7.14.1 Monthly wage types: 77n (data without cost center)

With this interface, the field lengths are not fixed. To separate the fields, a semicolon ";" is used. The field lengths listed below are maximum values.

The comma is the decimal separator.

The interface has the following format.

Position	Field	Type	Contents	Example
1	Record ID	Fixed	always "77"	77
[2]	File number	C(10)	Optional field that must be activated explicitly in the configuration. See also notes on the configuration below. This field includes a configurable value.	0584
[3 or 2]	Plant	C(20)	Optional field that must be activated explicitly in the configuration. See also notes on the configuration below. This field includes a configurable value.	G
4 or 3 or 2	Personnel number	N(8)	Personnel number from the HYDRA HR master data	87654321
5 or 4 or 3	Payroll month	YYYYMM	By default, the Accounting month is output (not the consecutive month).	201602
6 or 5 or 4	Leave days	N(3.1)	Leave taken (full or half days) as booked in the leave account in HYDRA.	12.5
7 or 6 or 5	Sick leave	N(2)	Sick leave are days when wage types are booked that have a "K" in field <i>Selection indicator</i> in the wage type master data.	5
8 or 7 or 6	Public holidays	N(1)	Public holidays are days when wage types are booked that have an "F" in field <i>Selection indicator</i> in the wage type master data.	1
9 or 8 or 7	Wage type	C(4)	Wage type	0004
10 or 9 or 8	Value	N(5.2)	Hours of a wage type	123.75

In each data record, the number of leave days, sick leave and public holidays is transferred. If no wage type data records are transferred for a person, the system creates an additional data record with empty wage type and value=0,00 if one of the day field does not equal 0.

Example data:

```
77;0584;G;568;201502;4,5;0;1;;0,00
77;0584;G;667;201502;1,5;5;1;100;97,50
77;0584;G;667;201502;1,5;5;1;200;4,25
77;0584;G;667;201502;1,5;5;1;220;14,00
77;0584;G;667;201502;1,5;5;1;400;34,50
77;0584;G;667;201502;1,5;5;1;450;12,00
77;0584;G;667;201502;1,5;5;1;528;1,00
77;0584;G;667;201502;1,5;5;1;600;8,00
77;0584;G;667;201502;1,5;5;1;996;21,50
77;0584;G;667;201502;1,5;5;1;999;40,00
77;0584;L;10003645;201502;0,0;0;0;526;1,00
77;0584;L;10003645;201502;0,0;0;0;996;18,50
77;0584;L;10003645;201502;0,0;0;0;999;13,50
```

INI data configuration INI name HYD-LUG

Note: In most cases, the following settings are valid for the wage type interface and the absence interface. In addition to the below-mentioned special configurations, the general configuration options for absence interfaces still apply.

OPTIONS / FORMAT=KDVLOHN_V2

Sets the format.

OPTIONS / COMPANY

or **COMPANY_SALARIED_EMPLOYEES** or **COMPANY_NONSALARIED_EMPLOYEES**

Using this option, the column "Plant" is activated and the contents are defined. Using **COMPANY_SALARIED_EMPLOYEES** or **COMPANY_NONSALARIED_EMPLOYEES**, you can configure the contents independent of the HR master data field Employment relationship.

OPTIONS / CONTRACT

Using this option, the column "File number" is activated and the contents are defined.

Other

This interface does not include a cost center field. If this format is therefore activated, the options "Without cost center" (→ **COSTCENTER=OFF**) and "Summarize wage types" (→ **WAGETYPES_ONCE=ON**) are implicitly activated. The option "Upload of daily wage type postings" is deactivated.

Further notes on the configuration

Wage types

In the master data of the wage types, you use the field *Selection indicator* to control which wage type days are used to identify *Sick leave* or *Public holiday*.

Selection indicator "K": Sick leave

Selection indicator "F": Public holiday

You use the standard options in the group *Payroll accounting* to control whether and how the wage type is transferred from HYDRA to KDVLOHN.

7.14.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	KDVLOHN_V2 Output format
CONTRACT or CONSULTANT	In the FORMAT=KDVLOHN_V2, you can enable and set the field <i>File number</i> via these options.

7.14.2 Absences: 7Fn (calendar dates)

With this interface, the field lengths are not fixed. To separate the fields, a semicolon ";" is used. The field lengths listed below are maximum values.

The interface has the following format.

Position	Field	Type	Contents	Example
1	Record ID	Fixed	always "7F"	7F
[2]	File number	C(10)	Optional field that must be activated explicitly in the configuration. See also notes on the configuration below. This field includes a configurable value.	0584

[3 or 2]	Plant	C(20)	Optional field that must be activated explicitly in the configuration. See also notes on the configuration below. This field includes a configurable value.	G
4 or 3 or 2	Personnel number	N(8)	Personnel number from the HYDRA HR master data	87654321
5 or 4 or 3	Payroll month	YYYYMM	By default, the Accounting month is output (not the consecutive month).	201602
6 or 5 or 4	From	YYYYMMDD	Date from.	20160201
7 or 6 or 5	To	YYYYMMDD	Date to.	20160229
8 or 7 or 6	Indicator	C(10)	Identifies the absence reason. See notes on configuration.	AK
9 or 8 or 7	Record indicator	I/D	I=Insert, D=Delete. HYDRA only supports I=Insert.	I

Additional notes

- The absence periods are transferred as one data record including weekends and days off.
- If the absence period includes a change of month, the period is divided. This means: If the absences include several months, they are divided into several periods.
- If you have configured a period of continued pay in HYDRA (LFZ), the LFZ period is finished when the specified time has expired and a period with another absence reason is transferred.
- You can transfer full-day absences and partial absences.
- The outputs of the record type 7Fn for absences and the record type 77n for wage types are included in the same file. If required, you can change the configuration and output absences and wage types in separate files.

INI data configuration INI name HYD-LUG

Note: In most cases, the following settings are valid for the wage type interface and the absence interface. In addition to the below-mentioned special configurations, the general configuration options for absence interfaces still apply.

OPTIONS / FORMAT=KDVLOHN_V2

Sets the format.

OPTIONS / ABSENCES= ON | OFF

Switches the absence interface on or off.

OPTIONS / COMPANY

or **COMPANY_SALARIED_EMPLOYEES** or **COMPANY_NONSALARIED_EMPLOYEES**

Using this option, the column "Plant" is activated and the contents are defined. Using **COMPANY_SALARIED_EMPLOYEES** or **COMPANY_NONSALARIED_EMPLOYEES**, you can configure the contents independent of the HR master data field Employment relationship.

OPTIONS / CONTRACT

Using this option, the column "File number" is activated and the contents are defined.

Further notes on the configuration

Control of absences

Using the *Control of absences*, you can control which absences are transferred with which "indicator".

Example data:

```
77;0584;G;667;201502;1,5;5;1;100;97,50
77;0584;G;667;201502;1,5;5;1;200;4,25
77;0584;G;667;201502;1,5;5;1;220;14,00
77;0584;G;667;201502;1,5;5;1;400;34,50
77;0584;G;667;201502;1,5;5;1;450;12,00
77;0584;G;667;201502;1,5;5;1;528;1,00
77;0584;G;667;201502;1,5;5;1;600;8,00
77;0584;G;667;201502;1,5;5;1;996;21,50
77;0584;G;667;201502;1,5;5;1;999;40,00
7F;0584;G;667;201502;20150202;20150205;K;I
7F;0584;G;667;201502;20150211;20150211;U;I
7F;0584;G;667;201502;20150217;20150217;F;I
7F;0584;G;667;201502;20150224;20150224;U;I
7F;0584;G;667;201502;20150225;20150225;K;I
7F;0584;G;667;201502;20150226;20150227;100;I
77;0584;G;885;201502;0,0;0;0;526;1,00
77;0584;G;885;201502;0,0;0;0;997;2,00
77;0584;G;885;201502;0,0;0;0;998;3,75
7F;0584;G;885;201502;20150202;20150202;100;I
77;0584;G;40563;201502;0,0;0;0;100;124,00
77;0584;G;40563;201502;0,0;0;0;200;12,25
77;0584;G;40563;201502;0,0;0;0;220;2,75
77;0584;G;40563;201502;0,0;0;0;526;18,00
77;0584;G;40563;201502;0,0;0;0;996;57,50
7F;0584;G;40563;201502;20150210;20150211;200;I
```

7.14.2.1 Interface configurations

Key	Value
CONTRACT or CONSULTANT	In the FORMAT=KDVLOHN_V2, you can enable and set the field <i>File number</i> via these options.
COMPANY or CUSTOMER or COMPANY_NONSALARIED_EMPLOYEES and COMPANY_SALARIED_EMPLOYEES	In the FORMAT=KDVLOHN_V2, you can enable and set the field <i>Plant</i> using these options.
ABSENCES_SEPARATE_FILE	ON With the formats KDVLOHN_V2, the absences are written in the same file as the wage types. You can use this option to specify that also with these formats the absences are written in a separate file using the name <i>hyfehl.dat</i> .
FORMAT	KDVLOHN_V2 The key of the monthly wage types also specifies the format. A manufacturer-specific format for the absence interface is only available with the formats KDVLOHN_V2 (Kanne new CSV format) The other formats issue the HYDRA standard format.

7.15 KDVLOHN (Kanne, old format fixed record length)

7.15.1 Upload of monthly wage types

The interface for transferring monthly wage types in the older format with fixed positions to the payroll accounting system KDVLOHN (Kanne) has the following format:

Field name	Position	Data typ/format	Contents	Example
Record type	1	N(2)	always "77"	77

File number	3	N(4)	always "0584"	0584
Plant	7	A(1)	For salaried employees a 'G' (wage earner) and for industrial workers an 'L' (wage earner).	G
Personnel number	8	N(5)	Personnel number	14235
V (= previous year)	13	A(1)	Constant empty	" "
Monat	14	N(2)	Monat	10
Leave days	20	N(3,1)	Holidas with one decimal place	025
Sick leave 80%	23	N(2)	Sick das with 80% LFZ, constant 0	00
Sick days with 100% incl. holiday credit	25	N(2)	Sick days with 100% LFZ incl. holiday credit, constant 0	00
Sick days with 100% without holiday credit	27	N(2)	Sick days with 100% LFZ without holiday credit (wage tpe 05 or 005)	03
Public holidays	29	N(1)	Public holidays (wage type 03 or 003)	1
Days of absence	30	N(2)	Absence days (wage type 78 or 078)	02
Wage type	32	N(3)	Wage type with leading zeros	013
Value	35	N(6,2)	Duration of the wage type with 2 decimal numbers	001350

For each person, the first data record contains the number of holidays, sick days without taking holidays, public holidays and absences into account. One wage type is transferred in each of the following records:
The number of holidays is in all data records.

7.15.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	KDVLOHN Output format

7.16 LGVSoft

The data record for transferring the monthly wage types to LGVSoft has the following structure:

7.16.1 Data format of the wage types: V4 (wage types)

Field	Description	Type	Place	Example
V4STAT	Status (A=active, I=inactive, 8=copy)	C1	1	A
V4FINR	Company number	N8.0	2	00000001
V4PENR	Personnel number	N8.0	10	00006711
V4PEJA	Period year	N4.0	18	2011
V4PERV	Period month from	N2.0	22	01
V4PERB	Period month until	N2.0	24	01
V4LOAR	Wage type	N5.0	26	00100
V4BETR	Amount	N11.2	31	Always 0
V4MENG	Quantity	N7.2	42	0017600
V4SATZ	Record	N9.2	49	Always 0
V4LOGR	Wage group	N3.0	58	Always 0
V4KOST	Cost center	C10	61	105
V4KOTR	Cost object	C15	71	empty
V4GEMC	Municipality code	C3	86	empty
V4ZUTX	Additional text	C25	89	empty
V4ENTS	Origin code	C1	114	empty
V4VOND	From	N8.0	115	Always 0
V4BISD	Until	N8.0	123	Always 0
V4ZSAA	Target record	C3	131	„V1 “
V4IDEN	Identification	C20	134	empty
V4WAER	Currency	C3	154	EUR

- Interface is created in an ftp format.
- Each data record is displayed in a line (0D, 0A end of the lines).
- Alphanumeric fields must be started with blanks. The field content is filled to the left.
- Numeric fields must be started with zeros. The field content is filled to the right with leading zeros

Example file (here shown with return at position 115)

```
A88888888009666520110101001000000000000000003225000000000000105
0000000000000000V1 EUR

A8888888800966652011010100031000000000000000500000000000000105
0000000000000000V1 EUR

A888888880096665201101010040000000000000000400000000000000105
0000000000000000V1 EUR

A88888888009666520110101000410000000000000003650000000000000105
0000000000000000V1 EUR
```

7.16.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	LGVSOFT Output format
CUSTOMER or COMPANY or COMPANY_NONSALARIED_EMPLOYEES and COMPANY_SALARIED_EMPLOYEES	With the formats LGVSOFT, you can use these options to specify the company.

7.16.2 Data format for absence times data: V9 (events)

Field	Description	Type	Place	Example
V9STAT	Status (A=active, I=inactive)	C1	1	A
V9FINR	Company number	N8.0	2	00000001
V9PENR	Personnel number	N8.0	10	00006711
V9VOND	From (YYYYMMDD)	N8.0	18	20010101
V9TYPE	Typ (e.g. ARZ – visit to the doctor, KRA – illness)	C3	26	KRA
V9BISD	Until (YYYYMMDD)	N8.0	29	20010115
V9KENN	Identifier (H = half day, S = hours)	C1	37	empty

V9KOMM	Comment	C30	38	empty
V9STUE	Hours-E	N7.2	68	0001600
V9FOER	Recurrent illness	C1	75	empty
V9AZTE	Working time level	C1	76	empty
V9AZTN	Working hours number	C10	77	empty
V9KOST	Cost center	C10	87	105
V9ENTS	Origin code	C1	97	empty
V9ENJM	Origin-JM	N6.0	98	Always 0

- Interface is created in an ftp format.
- Each data record is displayed in a line (0D, 0A end of the lines).
- Alphanumeric fields must be started with blanks. The field content is filled to the left.
- Numeric fields must be started with zeros. The field content is filled to the right with leading zeros

Example file (here shown with return at position 75)

A88888888000000920110101URL20110102	0000000
000000	
A88888888000000920110103URL20110105	0000003
000000	
A888888880009666520110101KRA20110102	0000000
000000	
A888888880009666520110103KRA20110103	0000000
000000	
A888888880009666520110105KRA20110120	0000012
000000	
A888888880009666520110121KS120110124	0000002
000000	
A888888880009666520110127KRA20110127	0000001
000000	
A88888888000966652011021147020110214	0000002
000000	
A888888880009666520110218KRA20110221	0000002
000000	

7.16.2.1 Interface configuration

Key	Value
FORMAT	LGVSOF
	The key of the monthly wage types also specifies the format. A manufacturer-specific format for the absence interface is only available for the formats LGVSOF. The other formats issue the HYDRA standard format.

7.17 LOGA

The field lengths are not fixed in the LOGA interface. To separate the fields, a semicolon ";" is used.

Field names are in the first row separated by a separator. This line is specified by LOGA, the order of the fields cannot be changed:

Man;Akr;Pnr;Name;Vorname;Vertnr;LA;Tage;Std;Fakt;Betrag;Kst;Kostart;Ktr;Tdat;Zdat;Her;Herdat;Proz;Kstb;Userid;Wert;Kst2Man;Kst2Akr;Kalk;Abr_Text;

7.17.1 Upload of monthly wage types

The following fields are filled in HYDRA:

Field name	Data type / format	Contents	Example
Man	C5 mandatory	System: HYDRA company number is converted to one number.	1
Akr	C5	Payroll area: This field remains empty.	
Pnr	C12 mandatory	Personnel number	12345
SC	C3 mandatory	Wage type	100
Days	N5.2	Absence times: absence days of a wage type. For wage types with the average type "T" the integer hour part.	
Std (hours)	N5.2	Hours of a wage type. Always" 0.0" for wage types with the average type "T".	167.75
Kst	C15	Executing cost center (personnel master cost center)	105
Zdat	Datum YYYY-MM-DD	Assignment date (first day of a accounting month)	1998-12-01
Kstb	C15	Cost center to be debited from the wage type posting.	106

Proz	N5.2	Assign performance efficiency rate for LLE.	131.77
Abr_Text	C254	Additional text for wage type (can be printed in payroll). Reserved for customizations.	

N5,2: 5 decimal place, thereof 2 decimal places. The comma is the decimal separator. Signs can be prefixed.

All other fields remain empty.

Special feature for LOGA: If a "T" is entered in the "Average type" field when configuring the wage types, the hourly portion of the wage type is confirmed in the "Days" field. The field "Std" remains empty.

7.17.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	LOGA Output format
WAGEGROUP	ON Special with LOGA: With format LOGA, the interface always sets the first day of the relevant month (FIRST).
DAY	FIRST / LAST Special with LOGA: With format LOGA, the interface always sets the first day of the relevant month (FIRST).
DATE	OFF The upload is performed without upload date. This option is only available for FORMAT=LOGA and FORMAT=TAYLORIX.
CUSTOMER or COMPANY or COMPANY_NONSALARIED_EMPLOYEES and COMPANY_SALARIED_EMPLOYEES	In format LOGA, you can set the system using these keys.
CONTRACT or CONSULTANT	With FORMAT=LOGA, the contract number that must be transferred can be set using this key.

7.17.2 Upload of absences

The transfer of absences to LOGA takes place together with the monthly wage types in a shared interface file.

The actual accounted absences for the corresponding month are transferred. For absences that extend beyond the end of a month, separate absences are posted for each month. In the case of certain absences, this may require manual intervention in LOGA (for example, during continued pay to determine the end of continued pay).

Changes to absences that are made in HYDRA after the transfer of absences to LOGA must be updated manually in LOGA.

The key for transferring the absences is a string that can be set in the *Absence reason* field in the *Absence processing* window (for example, AFREI, BILD, BUFML, MUTTI, ..., WEHRÜ):

Note:

The output of *special Umlauts* in the interface file is done in DOS code page (850).

Meaning of the separate fields in the data record:

Field name	Data type / format	Contents	Example
Record type	Text	constant "[ZEITENKAL]"	[ZEITENKAL] time calculation
Function	Text	constant "INSERT"	INSERT
ZK_UNIQID	Text	Unique identifier consisting of the current date and a consecutive number.	040226000001
ZK_HER	Text	constant "HYDRA"	HYDRA
ZK_HER_DATE	Date	constant ""	
ZK_USER_ID	Text	Clerk identification, constant ""	
MAN	Text	See wage type interface	
AK	Text	See wage type interface	
PNR	Number	See wage type interface	
Name	Text	constant ""	
First name	Text	constant ""	
VERTNR	Number	See wage type interface	

ZK_VON	Date YYYY-MM-DD	Start date of the absence	2004-01-16
ZK_BIS	Date YYYY-MM-DD	End date of the absence	2004-01-20
ZK_VONDAT2	Text	constant ""	
ZK_BISDAT2	Text	constant ""	
ZK_SYMBOL	Text	Time symbol (short name of absence payment)	MUTTI
ZK_PLANAN	Text	constant ""	I
ZK_ANZARBTA	Number	Number of working days, constant ""	
ZK_ANZKALT	Number	Number of calendar days, constant ""	
ZK_BEMERK	Text	Comment, constant ""	
Reserved		8 fields , constant ""	

7.17.2.1 Interface configuration

Key	Value
FORMAT	LOGA The key of the monthly wage types also specifies the format. A manufacturer-specific format for the absence interface is only available for the formats LOGA. The other formats issue the HYDRA standard format.
ABSENCES_SEPARATE_FILE	ON With the formats LOGA, the absences are written in the same file as the wage types. You can use this option to specify that also with these formats the absences are written in a separate file using the name <i>hyfehl.dat</i> .

7.18 LOGA 400

The interface to LOGA 400 contains fields with fixed record length.

There are the following formats for the separate field types:

A(n) Alphanumeric with n digits (left-aligned, filled up with blanks)

N(n) Numeric with n digits (right-aligned with leading zeros). If necessary, a minus symbol is placed in the first position for negative values.

N(n,i) Numeric with n digits, of which i are decimal places

Example A field N(4,2) contains "0321". This is the number 3,21.

If necessary, a minus symbol is placed in the first position for negative values.

7.18.1 Upload of monthly wage types

The B6 record for transferring monthly wage types to LOGA 400 has the following structure:

Field name	Item	Data type / format	Contents	Example

Record type	1	A(2)	constant "B6"	B6
Company	3	A(2)	The first two digits of the company the person works for.	01
Personnel number	5	N(7)	Personnel number from HYDRA. (The personnel number has 8 digits in HYDRA and only the last 7 digits are transferred.)	0041356
Document number	12	N(5)	always "00000"	00000
Record date of the document	17	YYYYMM	Year and month of the accounting month	200112
Day of issue	23	TT	First day of a accounting month	01
Executing cost center	25	A(10)	The person's regular cost center	49721
Cost center to be debited	35	A(10)	The person's regular cost center	48723
Cost object	45	A(10)	constant " " (10 blanks)	" "
internal use	55	A(1)	constant " " (1 blank)	" "
Wage type	56	A(3)	The first three digits of the wage type	100
Machine number	59	A(5)	constant " " (5 blanks)	" "
Operation	64	A(5)	constant " " (5 blanks)	" "
Sample piece	69	N(7)	always "0000000"	0000000
Yield	76	N(7)	always "0000000"	0000000
Production time per piece (time/piece)	83	N(5,2)	always "00000"	0000000
Quantity unit	88	A(1)	constant " " (1 space)	" "
Setup time	89	N(5,2)	always "00000"	0000000
Time used	94	N(5,2)	always "00000"	0000000
Performance efficiency rate	99	N(5,2)	always "00000"	0000000
Limited performance efficiency rate	104	A(1)	constant " " (1 space)	" "

Paid time	105	N(5,2)	Duration that was posted to the wage type	12800
Piecework for groups is paid	110	A(2)	constant " " (2 blanks)	" "
Internal use B5 or B6	112	A(4)	constant " " (4 blanks)	" "
Internal use B5 or B6	116	A(1)	constant " " (1 space)	" "
Wage record	117	N(7,3)	always "0000000"	0000000
Index	124	N(5)	always "00000"	00000
Zuschlagsprozent-satz	129	N(5,2)	always "00000"	00000
Amount	134	N(9,2)	always "000000000"	000000000
Group piecework:	143	A(2)	constant " " (2 blanks)	" "
Empty field B5 or B6	145	A(6)	constant " " (6 blanks)	" "

7.18.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	LOGA400
	Output format

7.18.2 Upload of absences

The B1 record for transferring monthly totals and absences to LOGA 400 has the following structure:

Field name	Item	Data type / format	Contents	Example
Record type	1	A(2)	constant "B1"	B1
Company	3	A(2)	The first two digits of the company the person works for.	01
Personnel number	5	N(7)	Personnel number from HYDRA. (The personnel number has 8 digits in HYDRA and only the last 7 digits are transferred.)	0041356
Consecutive number	12	N(3)	always "000"	000
Record date of the document	15	YYYYMM	Year and month of the accounting month	200112
Day of issue	21	TT	First day of a accounting month	01
Days with target time	23	N(2)	Number of days including target time	21
Target time	25	N(5,2)	Number of target hours	16800
Tax days	30	N(2)	always "00"	00
Days present	32	N(3,1)	Number of days inclding target time	180
Leave days	35	N(3,1)	Number of vacation days (payment day type 402) incl. half days of holiday (payment day type 404)	025
Sick leave	38	N(3,1)	Target time days (only whole days) with payment day type 400 or 401.	010
Public holidays	41	N(3,1)	Target time days with payment day type 409 including half public holidays with payment day type 410.	000
Social days	44	N(3,1)	Target time days with payment day type 405.	000
Excused absence	47	N(3,1)	Target time days with payment day type 408.	000

Unexcused absence days	50	N(3,1)	Target time days with payment day type 407.	000
Holiday leave hours	53	N(5,2)	always "00000"	00000
Hours of illness	58	N(5,2)	always "00000"	00000
Public holiday hours	63	N(5,2)	always "00000"	00000
Social hours	68	N(5,2)	always "00000"	00000
Excused absence hours	73	N(5,2)	always "00000"	00000
Unexcused absence hours	78	N(5,2)	always "00000"	00000
Total for used piecework time	83	N(5,2)	always "00000"	00000
Calculated flextime hours	88	N(5,2)	Changes of the flextime accounts (max. 99 minus hours can be transferred)	-1250
Printed gross wage	93	A(1)	constant " " (1 space)	" "
Wage after tax printed	94	A(1)	constant " " (1 space)	" "
Time collection Hours	95	N(5,2)	always "00000"	00000
Number of interruptions	100	N(3,0)	always "000"	000
Empty field	103	A(48)	constant " " (48 blanks)	" "

Note: To ensure that the absences are assigned correctly, the following payment day types must be observed:

Wage Day type	Meaning
400, 401 :	Sick leave (with/without continued pay)
402 :	Half holiday
404 :	Half holiday
405 :	Social day
407 :	Unexcused
408 :	Excused
409 :	Full holiday
410 :	Half holiday

7.19 Navision Wage

7.19.1 Upload of monthly wage types

The data record for transferring the monthly wage types to Navision Pay has the following structure:

Field name	Data type / format	Contents	Example
Personnel number	N(5)	Personnel number from HYDRA	00123
Wage type	N(4)	Wage type number	100
Number of days	N(4,2)	Number of total absence days To transfer the number, the wage type must match the number of the absence payment.	6
Accounting date	DDMMYY	Accounting date	010208
Duration	N(7,2)	Duration that was posted to the wage type	48.50

The different data fields are separated by a '|' The data record is finished via CRLF.

Example:

```
96665|100|2|010507|59.87|
96665|111||010507|4.25|
96665|200||010507|7.00|
96665|211||010507|6.00|
96665|400||010507|9.50|
96665|420||010507|0.43|
96665|450|10|010507|72.00|
96665|600|2|010507|16.00|
```

7.19.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	NAVISION Output format
PERSONNEL_NUMBER_LENGTH	With FORMAT=NAVISION, you can use this option to configure the personnel number length with leading zeros. If the option is not set, the personnel number is set to five digits and is filled with leading zeros.

7.20 ORGATIME

7.20.1 Upload of monthly wage types

The interface for confirming monthly wage types to ORGATIME has the following structure:

Field	Pos / length	Description
Personnel number	1 / 8	Personnel number with leading zeros left-aligned 8 digits
Not assigned	9 / 2	Empty 2 digits
Wage type	11 / 6	Labeled wage types, must be posted. 6 digits

Field	Pos / length	Description
Date	17 / 6	Date in the format of YYMMDD - 6 digits
Not assigned	23 / 10	Empty 10 digits
Company	33 / 2	Company 2 digits
Not assigned	35 / 14	Empty 14 digits
Cost center	49 / 8	Cost center, aligned to the right
Not assigned	57 / 22	Empty 22 digits
Quantity	79 / 12	Quantity 12 digits
Not assigned	91 / 8	Empty 8 digits
CRLF		

7.20.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	ORGATIME Output format

7.21 Paisy

Legend:

A(n) Alphanumeric with n digits

N(n) Numeric with n digits

N(n,i) Numeric with n digits, with i decimal places

Example: In a field N(4,2), the value is "0321". This is the number 3,21.

K(n) Constant text of length n

7.21.1 Upload of monthly wage types

Uploads of the monthly wage is in the following format:

Field name	Type / format	Digits	Contents	Example
Record type	K(2)	1 - 2	Record type (constant P1)	"P1"
Company	A(7)	3 - 6	Company from personnel master data left-aligned (Paisy defines only positions 3 to 4 as company)	"BSP "
Personnel number	N(6)	7 – 12	Personnel number with leading zeros	"000041"
Group number	K(4)	13 – 15	Paisy: For group accounting Not filled by HYDRA	" "
General ledger account assignment	K(1)	16	Not filled by HYDRA	" "
Date	A(6) DDMMYY	17 – 22 DDMMYY	Date, first day of the consecutive month	"010297"
Accounting number	K(1)	23	Always "1"	"1"
Collection identifier	K(1)	24	Constant "S"	"S"
Wage type	A(3)	25 – 27	Wage type	"265"
Time	N(5,2)	28 - 32	Time that is posted to the wage type. Duration in industrial minutes	"14372"
Factor / Wage group	N(5,2) C(4)	33 – 37 33 – 36	Paisy fills this field twice and interprets it as a factor or wage group. Is left empty by HYDRA.	" "
Amount	N(7,2)	38 - 44	Amount Always 0	"0000000"

7.21.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	Paisy Output format
ABSENCES	ON
WAGEGROUP	ON You can use this option to transfer the entry in field <i>LOBU indicator</i> from the configuration of wage types to the field <i>Wage group</i> of the Paisy interface.
DAY	FIRST / LAST Special with <i>LOGA</i> : With format <i>LOGA</i> , the interface always sets the first day of the relevant month (FIRST).
CUSTOMER or COMPANY or COMPANY_NONSALARIED_EMPLOYEES and COMPANY_SALARIED_EMPLOYEES	With the formats PAISY, you can use these options to specify the company.
COMPANY_LENGTH	You can use this option to set the length of the company with FORMAT=PAISY.
COSTCENTER	ON With FORMAT=PAISY, the cost center is not included in our standard interface. Use this key to activate the output of the cost center.

7.21.2 Upload of absences

The upload of the absences to Paisy is done as a P3 record:

Field name	Data type / format	Contents	Example
Assign type	K2	Assign type (constant P3)	P 3
Company	A2	Position 1 and 2 of the person's company	24

Empty	K2	Constant 2 blanks	" "
Personnel number	N6	HYDRA personnel number (max. the last 6 digits)	999999
Empty	4	Constant 4 blanks	" "
Start date	DDMMYY	Start date of the absence	070104
Accounting no.	1	Always 1	1
Collection ID	1	Constant Z	Z
Time type	N3	The last 3 digits absence payment	410
Time	5	Constant 5 blanks	" "
Empty	K%	Constant 5 blanks	" "
End date	DDMMYY	End date of the absence	120104
Empty	24	Constant 24 blanks	" "
Shift ID	A3	"GAN" for full day's holiday and "HAL" for half day's holiday	GAN

7.21.2.1 Interface configuration

Key	Value
FORMAT	Paisy The key of the monthly wage types also specifies the format. A manufacturer-specific format for the absence interface is only available for the formats PAISY. The other formats issue the HYDRA standard format.
ABSENCES_SEPARATE_FILE	ON With the formats PAISY, the absences are written in the same file as the wage types. You can use this option to specify that also with these formats the absences are written in a separate file using the name <i>hyfehl.dat</i> .

7.22 PASBAS (Syllwasschy)

7.22.1 Upload of monthly wage types

The data record for transferring the monthly wage types to PASBAS (Syllwasschy) has the following structure:

Field name	Item	Data type	Contents	Example
LBSA	1	N(2)	Record type (constant 83)	83
LBFA	3	C(5)	Company	BSP
LBL1	8	C(3)	Empty field	
LBPERS	11	N(4)	Personnel number 4 digits	9999
LBKST	15	C(6)	Cost center 6 digits	123456
LBTTX	21	C(2)	Day (constant "01")	01
LBMM	23	N(2)	Consecutive month	06
LBLART	25	C(3)	Wage type 3 digits	100

LBSTD	28	N(8,2)	Duration of absence/attendance	00000800
LBKZ	36	C(1)	Amount ID (constant 1 "Euro")	1
LBZT1	37	N(8,2)	constant 0	00000000
LBZT2	45	N(8,2)	constant 0	00000000
LBL2	53	C(2)	constant empty	
LBAUF	55	C(11)	constant empty	
LBPOS	66	C(5)	constant empty	
LBFAK	71	N(5,2)	constant 0	00000
LBZUS	76	N(5,2)	constant 0	00000

At the end of each row are Carriage Return and Linefeed (CR/LF).

Data types:

Type	Meaning	Formatting
C(n)	Character (string, text)	Length <i>n</i>
N(n)	Integer	with max. digits <i>n</i>
N(x.y)	Decimal number	Without decimal separator with maximum <i>x</i> total digits and <i>y</i> decimal places.

Example (with return at position 71):

```
83BSP      999912345601051000000080010000000000000000
0000000000
```

7.22.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	PASBAS Output format
CUSTOMER or COMPANY or COMPANY_NONSALARIED_EMPLOYEES and COMPANY_SALARIED_EMPLOYEES	With the formats PASBAS, you can use these options to specify the company.

7.23 PEWISO (S+P payroll accounting)

7.23.1 Upload of monthly wage types

The data record for transferring the monthly wage types to PEWISO (S+P Payroll Accounting) has the following structure:

Data format of the wage transaction data

Field	Description	Type	Examples	
System number	Number of the system	Num	1	100
Accounting month	Accounting month	Num	2	12
Accounting year	Accounting year	Num	1996	2000
Personnel number	Personnel number of the employee	Num	1	520
Wage type number	Number of the wage type	Num	5	102
Date	Day of the accounting month, if necessary	Num	12	[empty]
Cost center	Number of cost center, if necessary	Alpha	"4001"	[empty]
Cost object	Number of cost object, if necessary	Alpha	"1000"	[empty]
Work type	Encoding of the work type according to the specifications of the employment office, if necessary for WG/ZWG/WAG application in s+p Baulohn	Alpha	"B"	[empty]
Number	Factor 1, numeric value or zero	Currency	10.00	1.00
Amount	Factor 2, numeric value or zero	Currency	17.80	-78.00
bonus	Bonus value, depending on the definition of the wage type, numeric value or zero	Currency	25.00	[empty]

- The interface has separated fields due to the semicolon.
- Each data record is displayed in a line (OD, OA end of the lines).
- Numeric fields are displayed in the format: 999999.99 or -999999.99 or 9999999, alphanumeric fields in quotation marks

Field sequence:

Client number; payroll month; payroll year; personnel number; wage type number; [date]; [cost center]; [cost object]; [work type]; number; amount; overhead.

The entry in the square brackets are optional.

Example file

```
100;12;2009;9;1100;01;"4711";;;651.62;;
100;12;2009;9;370;01;"4711";;;7.50;;
100;12;2009;9;42;01;"4711";;;5.50;;
100;12;2009;9;51;01;"4711";;;2.08;;
100;12;2009;10;41;01;"5187";;;25.00;;
100;12;2009;10;526;01;"5187";;;42.00;;
```

7.23.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	PEWISO
	Output format

7.24 proLOHN (proALPHA)

To import gross wage data from other systems, ProAlpha provides an ASCII interface which can be used to import data from a connected PZE system.

The field contents are to be lined up in the appropriate length for each record. Unused blanks must be filled in with blanks. Character fields are to be transferred left-aligned and numeric fields right-aligned. In accordance with setting of the E-parameter (set parameter = European format), the decimal point must be a comma if the format is European, otherwise the point must be used. As of version 4.02a, both comma and dot can be used as decimal point independently of the E-parameter. The end of record indicator (CR/LF) customary in the operating system used must be set at the end of each record.

There is no column separator.

7.24.1 Upload of monthly wage types

The interface has the following format:

Field name	Item	Data type	Contents	Example	Format
BLANK	1	C(2)	Constant empty		x(2)
FIRMA	3	C(10)	Company	BSP	x(10)
PERSKZ	13	C(1)	Person ID constant „P“	P	X
MITARBEITER (employee)	14	N(6)	Personnel number	999999	zzzzz9
TAG	20	N(2)	Accounting day	10	z9
MONAT	22	N(2)	Accounting month	12	z9
JAHR	24	N(4)	Payroll year	2006	9999
LOHNART	28	C(3)	Wage type of absence pay	100	x(3)
ZEIT	31	N(7,2)	Duration of absence/attendance	8.00	-zz9.99
MENGE	38	N(10)	Constant empty		-zzzzz9.99
SATZ (record)	48	N(10)	Constant empty		zzzz9.9999
MENGENSATZ (quantity record)	58	N(8)	Constant empty		zz9.9999
PROZENT (percentage)	66	N(6)	Constant empty		zz9.99
BETRAG (amount)	72	N(10)	Constant empty		-zzzzz9.99
KOSTENSTELLE (cost center)	82	N(8)	Cost center	105	zzzzzzz9
KOSTENTRAEGER (cost object)	90	C(20)	Constant empty		X(20)
BESCHREIBUNG:	110	C(20)	Constant empty		X(60)

At the end of each row are carriage Return and linefeed (CR/LF).

Data types:

Type	Meaning	Formatting
C(n)	Character (string, text)	with max. length n
N(n)	Integer	with max. digits n
N(x.y)	Decimal number	with "." (Point) as decimal separator and maximum x total digits and y decimal places. Negative values are preceded by the sign "-".

Example:

Generation of interface file

Selection

Person: 1 to 99999999

Comp.: [dropdown] Area: [dropdown] Cost center: [dropdown]

Year: 2010 Period: 1

01.01.2010 to 31.01.2010

Person	Comp.	Area	Cost center	Period
760BSPVI	200801	667	31100	+011200000000
760BSPVI	200801	667	31100	+016800000000
760BSPVI	200801	667	31100	+028000050000
760BSPVI	200801	667	31400	+003200000000
760BSPVI	200801	667	31400	+004800000000
760BSPVI	200801	667	31400	+008000020000
760BSPVI	200801	667	31420	+003200000000
760BSPVI	200801	667	31420	+004800000000
760BSPVI	200801	667	31420	+008000020000
760BSPVI	200801	667	31450	+003200000000
760BSPVI	200801	667	31450	+004800000000
760BSPVI	200801	667	31450	+008000020000
760BSPVI	200801	667	31526	+002200000000
760BSPVI	200801	667	31526	+003300000000
760BSPVI	200801	667	31526	+005500000000
760BSPVI	200801	667	31600	+001600000000
760BSPVI	200801	667	31600	+002400000000
760BSPVI	200801	667	31600	+004000010000
760BSPVLE	200801	40256	31100	+060250000000
760BSPVLE	200801	40256	31200	+004500050000
760BSPVLE	200801	40256	31526	+018000000000
760BSPVLE	200801	40256	31600	+008000000001

7.24.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name: HYD-LUG
Section: OPTIONS
Key: xxxxxx
Value: xxxxxx
Active: ☒

Key	Value
FORMAT	PROLOHN Output format

7.24.2 Upload of absences

For the upload of absences, the same format is used than for the monthly wage types. You can specify the absence reason transferred to proLOHN using the application *Control of absences*.

The absences are not transferred as periods (with start and end date), but per day. When you configure the absence interface, be careful to configure that the absences are transferred as separate days.

7.24.2.1 Interface configuration

Key	Value
FORMAT	PROLOHN The key of the monthly wage types also specifies the format. A manufacturer-specific format for the absence interface is only available for the formats PROLOHN. The other formats issue the HYDRA standard format.
ABSENCES_SEPARATE_DAYS	ON If this option is enabled, the absences are uploaded as separate days and not as periods from...to. If the absences are transferred in the format PROLOHN, this option must be enabled because the interface format only provides a date field.

7.25 sage KHK

7.25.1 Upload of monthly wage types

Uploads of the monthly wage is in the following format:

No.	Field designation	Type	VKS	Item	Comment
1	Month	Alpha	2	1	Payroll month (usually the consecutive month)
2	Personnel number	Alpha	6	3	with leading zeros If the personnel numbers are longer, the leading digits are cut.
3	Wage type number	Alpha	3	9	For longer HYDRA wage types, the trailing digits are cut off.
4	Time	Alpha	6	12	HHH:MM or TTT:TT (T = daily wage types). The transfer is performed in industrial minutes (divided by 100).
5	Amount	Alpha	6	18	Constant 000.00 (3 pre-decimal places, point, 2 decimal places)
6	Cost center	Alpha	5	24	For longer HYDRA cost centers, the trailing digits are cut off.
7	G/L account	Alpha	5	29	Constant 00000.
8	Cost object	Alpha	5	34	The field is not filled, so the master cost object from the personnel master is used in the KHK system.
9	ISO code of the currency.	Alpha	3	39	Specify EUR Not assigned. This means that KHK uses the wage system's own currency.
10	CR/LF	Alpha	2	42	Alt (13) + Alt (10)

The interface for confirming monthly wage types corresponds to the sage-KHK manual "Classic Line 2000" chapter 10, status 12/4/2000.

Note: When using this interface, only numeric cost centers (5 digits with leading zeros) and wage types (3 digits with leading zeros) are allowed in HYDRA.

Infos from the sage-KHK manual

Attention: Contrary to chapter 1.1 of the sage-KHK-manual ("Introduction/General") the attributes of this data set are not to be separated by separators such as comma or inverted commas.

The data records are to be stored for KHK in a file that must be located in the current system directory. The file name is 020410mm (mm = month 01-12) without extension. Example „January“: 020410001. After successful import, the file is provided with the extension *.KHK. This file serves as a backup copy and remains in the system directory until it is overwritten by a corresponding file with the same name, usually after twelve months.

7.25.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	SAGE-KHK
	Output format

7.26 Taylorix

7.26.1 Upload of monthly wage types

In the interface for uploading monthly wage types to Taylorix, the length of the fields is not fixed. Instead, they are separated by a separator. The separator is the semicolon ";".

In the file header there is a line with the company number and the company identification number. These are preset in HYDRA (with 483543;6101) and, if necessary, can be changed with a text editor before being read into Taylorix.

Field names are in the second line separated by a separator. This line is specified by Taylorix.

The following lines are data rows. There are the following formats for the separate field types:

- Text field
Can be formatted by HYDRA with trailing blanks. These are then ignored by Taylorix.
- Number fields
Decimal separators for the decimal places is the point. Numbers can include leading zeros. These are processed by Taylorix correctly.
- Date fields:
A date is specified in the format YYYY-MM-DD.

The data rows have a processing indicator at the beginning, which is always "A" for "Append" in the payroll interface. A data row is always concluded with the characters for "carriage return" and "line feed" (hexadecimal 0D0A).

The data has the following structure:

Field name	Data type / format	Contents	Example
LVB_PERS	Number	Personnel number	14234
LVB_LA	Text	Wage type	100
LVB_STD	Number	Hours of a wage type	008.00
LVB_BETR	empty	empty	""
LVB_TAG	Date	First day of the accounting month. No date is specified for the customer system USG.	1999-09-01
LVB_LSATZ	empty	empty	""
LVB_ZUSCH	empty	empty	""
LVB_KOST	Text	Cost center to which the time on the wage type was posted in HYDRA.	"105 "
LVB_SZAEHL	empty	empty	""
LVB_BAUST	empty	empty	""
LVB_EINH	empty	empty	""
LVB_LG	empty	empty	""
LVB_RUEST	empty	empty	""
LVB_MENGE	empty	empty	""

LVB_VORGE	empty	empty	""
LVB_VKEZI	empty	empty	""

Example:

Note that the line with the field names is displayed here on two lines for space reasons.

```
483543;6101
VKZ;LVB_PERS;LVB_LA;LVB_STD;LVB_BETR;LVB_TAG;LVB_LSATZ;LVB_ZUSCH;LVB_KOST;LVB
_SZAEHL;LVB_BAUST;LVB_EINH;LVB_LG;LVB_RUEST;LVB_MENGE;LVB_VORGE;LVB_VKEZI
A;2000;100;001.67;;1999-08-01;;;105;;;;;;;;;
A;2003;100;219.40;;1999-07-01;;;105;;;;;;;;;
A;2003;100;252.65;;1999-08-01;;;105;;;;;;;;;
A;2003;100;244.50;;1999-09-01;;;105;;;;;;;;;
A;2005;100;015.75;;1999-06-01;;;105;;;;;;;;;
A;2005;400;023.50;;1999-06-01;;;105;;;;;;;;;
A;2005;400;004.50;;1999-05-01;;;105;;;;;;;;;
A;2005;100;091.75;;1999-07-01;;;105;;;;;;;;;
A;2005;400;095.17;;1999-07-01;;;105;;;;;;;;;
A;2020;1;135.75;;1999-01-01;;;2040000;;;;;;;;;
A;2020;30;000.75;;1999-01-01;;;2040000;;;;;;;;;
A;2020;35;000.75;;1999-01-01;;;2040000;;;;;;;;;
A;2020;42;008.00;;1999-01-01;;;2040000;;;;;;;;;
A;2020;1;119.50;;1999-02-01;;;2040000;;;;;;;;;
A;2020;30;000.25;;1999-02-01;;;2040000;;;;;;;;;
A;2020;35;000.25;;1999-02-01;;;2040000;;;;;;;;;
A;2020;380;040.00;;1999-02-01;;;2040000;;;;;;;;;
```

7.26.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	TAYLORIX Output format
DATE	OFF The upload is performed without upload date. This option is only available for FORMAT=LOGA and FORMAT=TAYLORIX.

7.27 TOPAS

7.27.1 Upload of monthly wage types

The data records for uploading monthly wage types have the following structure:

Field name	Data type / format	Max. digits	Notes
FIRMA	alphanum.	3	3 digits, last digit from HYDRA is cut.
PERSN	alphanum.	5	Personnel number, leading zeros
YYMM	YYYYMM	6	Payroll month
YYMMV	-	6	(empty)
LOA	alphanum.	3	3 characters of wage type, last character cut off from HYDRA
BEZZT	FLIESS	6.2	Duration, sum of attendance and absence time; displayed in hours with two decimal places without decimal separator (23.25 hours gives 002325).
TAGE (days)	-		(empty)
FAKTOR (factor)	-		(empty)
LOBET_F	-		(empty)
WKZ	-		(empty)

LOBET	-		(empty)
LOBEST	-		(empty)
LOBESV	-		(empty)
KOSTL	alphanum.	10	Cost center of the wage type posting
KOTR	alphanum.	10	(empty) cost object
VORG	-		(empty)
BEDT	-		(empty)
KZRAB	-		(empty)
HERKZ	-		(empty)
LKZ	-		(empty)
ERFUSR	-		(empty)
ERFDT	-		(empty)
CHGUSR	-		(empty)
CHGDT	-		(empty)
CHGZT	-		(empty)

The semicolon ";" is used as a separator for the fields.

Example (110 hours on wage type 100, cost center 5187):

BSP;00123;200201;;100;11000;;;;;;5187;;;;;;;;;;

7.27.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name	HYD-LUG
Section	OPTIONS
Key	xxxxxx
Value	xxxxxx
Active	☒

Key	Value
FORMAT	TOPAS Output format

7.27.2 Upload of absences

Absence times are transferred via a separate interface file. The file is name „hyfehl.dat“, is located on the HYDRA server in the directory where HYDRA is installed and is always generated together with the interface for monthly wage types.

Data record have the following structure:

Field name	Data type / format	Max. digits	Notes
FIRMA	alphanum.	3	3 digits, last digit from HYDRA is cut.
PERSN	alphanum.	5	Personnel number, leading zeros
VONDT	DDMMYY Y	10	Start date of the absence
BISDT	DDMMYY Y	10	End date of the absence
FZGR	alphanum.	3	Absence group is reserved for "FEH".
FZGD	alphanum.	3	Absence reason; type number of the absence remuneration or Lobu error reason from the absence processing.
FZTAGZR	fliess	7.2	Absence days in numbers (with 2 decimal places)
FZSTDZR	fliess	9.2	(empty)
FZTX	alphanum.	50	(empty)
DVGRD	numeric	2	(empty)
LKZ	alphanum.	1	(empty)
ERFUSR	alphanum.	10	(empty)
ERFDT	DDMMYY Y	10	(empty)

CHGUSR	alphanum.	10	(empty)
CHGDT	DDMMYY Y	10	(empty)
CHGZT	-		(empty)

A data record looks like the following example:

(4 days absence 300 from 28.01.2002 to 31.01.2002)

BSP;00009;28.01.2002;31.01.2002;FEH;300;400;;;;;;;;;

7.27.2.1 Interface configuration of absences

Key	Value
FORMAT	TOPAS The key of the monthly wage types also specifies the format. A manufacturer-specific format for the absence interface is only available for the formats TOPAS. The other formats issue the HYDRA standard format.

7.28 Varial

7.28.1 Upload of monthly wage types

The data for confirming monthly wage types is transferred in the following format:

Field name	Data type / format	Contents	Example
Record ID	A(3)	Record identification, constant "HYD"	"HYD"
Company number	N(3)	Company from the HR master data Only the first 3 digits of the company number are transferred.	"01 "
Include	YYYYMM	Payroll month	200310

Personnel number	N(7)	Personnel number (max. 7 digits with leading zeros)	0001432
Entry date	YYMMDD	Contains the first day of the months when data are collected. If there is a daily data transfer, then the day is also included.	031001
Wage type	N(3)	Wage type (max. 3 digits)	"21 "
counters	N(6)	A constant 0 is transferred in this field. Variational sets unique value.	000000
KST/KTR/order	N(9)	always "000000000"	000000000
Cost center	N(9)	Cost center where the wage type was collected (9 digits with leading zeros)	000036745
Record priority	N(1)	always "0"	0
Wage group	N(2)	constant "01	01
Order number	A(15)	constant " " (15 blanks)	" "
Operation number	N(3)	always "000"	000
Sub operation number	N(1)	always "0"	0
Target setup time	N(5)	constant "00000+"	00000+
Actual setup time	N(5)	constant "00000+"	00000+
Order quantity	N(9)	constant "000000000+"	000000000+
Yield	N(9)	constant "000000000+"	000000000+
Sz yield VARIATIONAL	N(1)	always "1"	1
Target time per unit	N(7)	constant "0000000+"	0000000+
Target time yield	N(7)	constant "0000000+"	0000000+
Target time order quantity	N(7)	constant "0000000+"	0000000+
Actual processing time	N(9)	Duration of the wage type (9 digits, including 2 decimal places)	000002475+
Quantity unit yield	A(2)	always "00"	00

Record type / amount	N(9)	constant "0000000000+"	0000000000+
Performance level	N(7)	constant "0000000000+"	0000000000+
Filler	A(8)	constant " " (8 blanks)	" "
Filler (PC/UNIX)	A(1)	constant " " (1 space)	" "

7.28.1.1 Interface configuration

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	VARIAL
	Output format

7.29 Winlohn (Sage Schweiz AG)

7.29.1 Upload of monthly wage types

Data types:

Type	Meaning	Formatting
Cn	Character (string, text)	with max. length n
Nn	Integer	The maximum number of digits n. Negative values are preceded by the sign "-".
Nx.y	Decimal number	with "." (Point) as decimal separator and maximum x total digits and y decimal places. Negative values are preceded by the sign "-".

Structure:

Field/meaning	Column name	Data type
---------------	-------------	-----------

Personnel number	Pnr	N8
Wage type	Wage type key	C4
Hours (or day) for wage type	Unit	N10.2
Not assigned	Charge	-
Not assigned	Financial accounting - target	-
Not assigned	Financial accounting - credit	-
Cost center for wage type posting (usually corresponds to the cost center in the HR master data)	KST	C10
Not assigned	View 3	-
Not assigned	View 4	-

The column separator is the semicolon ";". At the end of each row is CR/LF

Example:

```

203;061;15.00;;;0013;;
203;068;7.00;;;0013;;
203;091;5.00;;;0013;;
203;095;2.50;;;0013;;
203;100;88.00;;;0013;;
205;061;15.00;;;0009;;
205;064;2.00;;;0009;;
205;084;1.75;;;0009;;
205;091;5.00;;;0009;;
205;095;2.25;;;0009;;
205;100;126.00;;;0009;;
206;050;0.50;;;0009;;
206;061;15.00;;;0009;;
206;084;1.25;;;0009;;
206;091;5.00;;;0009;;
206;095;2.50;;;0009;;
206;100;94.25;;;0009;;
208;061;15.00;;;0012;;
208;064;23.25;;;0012;;

```

7.29.1.1 Interface configuration of the monthly wage types

The interface format is then enabled via INI data configuration (System administration → System settings → INI data configuration). The following settings are made:

INI name HYD-LUG
Section OPTIONS
Key xxxxxx
Value xxxxxx
Active ☒

Key	Value
FORMAT	WINLOHN
	Output format

7.30 VEDA

7.30.1 Upload of monthly wage types

The data record to transfer wage types to VEDA has the following structure:

*

Fields that must be populated are identified via an * in front of the field name. All other fields can be left empty – they might be filled during transfer.

Enter valid date in format DD.MM.YYYY or 01.01.0001.

Field	Name	Comment	Transfer from Hydra
N2FIRM	* Company	Company abbreviation VEDA HR Pay = recipient company	Company from HR master data Alpha 3 digits
N2PRNR	* Personnel number	Target personnel no. for data record	Personnel number from HR master data Numeric 6 digits
N2ABRJ	Accounting year	If empty: filled with year entered during transfer	Accounting year Numeric 4 digits (YYYY)
N2ABRM	Accounting month	If empty: filled with month entered during transfer	Accounting month Numeric 2 digits (MM)
N2LOAR	* Wage type	Valid wage type in VEDA HR Entgelt	Wage type Alpha 3 digits
N2FIGR	Company group	Currently not used	Not transferred
N2ABGR	Group of accounting		Not transferred
N2LTYP	Kind of wage type		Not transferred
N2LFOL	Sequence number wage type		Not transferred
N2STDF	Number of hours		Time of the wage type posting Numeric 5 digits (with 2 decimal places, separator comma)
N2TAGE	Days		Not transferred
N2STCK	Pieces of yield for		Not transferred

	piecework wage		
N2MINU	Specification of minutes		Not transferred
N2SFAK	Hourly factor		Not transferred
N2PROZ	Percentage		Not transferred
N2KLME	Kilometer		Not transferred
N2MENG	Quantity		Not transferred
N2KAWO	Calendar week		Not transferred
N2ABRB	Amount of accounting		Not transferred
N2AKST	Executing cost center	If empty: Cost center from HR master data or in case of corrections from wage account	Cost center > of the wage type posting Alpha 10 digits
N2TTKZ	Tariff table ID	Currently not used	Not transferred
N2AENR	Change number of wage type	Currently not used	Not transferred
N2LOFI	Company for wage types	Company where the wage types are managed (recipient company)	Not transferred
N2VEMI	Calculated minutes		Not transferred
N2HERK	Source of data record		Not transferred
N2LDAT	*** Date of performance	If empty: Source of 'STA'	Not transferred
N2FOLG	Sequence, serie		Not transferred
N2ARGA	Operation		Not transferred
N2TATK	Activity		Not transferred
N2BETM	Production resource		Not transferred
N2BKST	Charged Cost center		Not transferred
N2BEST	Number of persons		Not transferred
N2SCHI	Shift number		Not transferred
N2AUSS	Scrap		Not transferred
N2RUZE	Setup time in hours		Not transferred
N2KOTR	Cost object	If empty: Cost object from HR master data	Not transferred
N2VFMM	Month of correction	Must only be filled, if correction in previous months, otherwise 0	Not transferred
N2VFJJ	Year of correction	Must only be filled, if correction in previous months, otherwise 0	Not transferred
N2SKTO	G/L account	If empty: G/L account from wage type	Not transferred
N2KOAR	Cost type	If empty: cost type from wage type	Not transferred
N2FEKZ	Failure ID	Currently not used	Not transferred
N2LOKZ	ID of delete	Currently not used	Not transferred
N2PERI	Period of accounting	Autom. filled from correction period, otherwise from accounting period	Not transferred
N2FR01	Application field 1 - alpha	(field definition 1 alphanumeric)	Not transferred
N2FR02	Application field 1 - alpha	(field definition 1 alphanumeric)	Not transferred
N2FR03	Application field 1 - alpha	(field definition 1 alphanumeric)	Not transferred
N2FR04	Application field 1 - alpha	(field definition 1 alphanumeric)	Not transferred
N2KZAT	ID of hours lost	Currently not used	Not transferred
N2FR05	Application field 1 - alpha	(field definition 1 alphanumeric)	Not transferred
N2FR06	Application field 9 - num.	(field definition 9,2 packed numeric)	Not transferred
N2FR07	Application field 9 - num.	(field definition 9,2 packed numeric)	Not transferred

N2FR08	Application field 9 - num.	(field definition 9,2 packed numeric)	Not transferred
N2FR09	Application field 9 - num.	(field definition 9,2 packed numeric)	Not transferred
N2FR10	Application field 9 - num.	(field definition 9,2 packed numeric)	Not transferred
N2ZUKZ	ID industrial minutes / normal minutes	I=industrial minutes, N=normal minutes (if different from company master data, conversion of hours, minutes and setup time during transfer)	Fixed value: I Alpha 1 digit
N2LOTX	Wage type text	If empty and no following wage type: text from wage type master data	
N2VDAT	*** Date from	Currently not used, empty (01.01.0001)	Fixed value: 01.01.0001 Alpha 10 digits
N2BDAT	*** Date to	Currently not used, empty (01.01.0001)	Fixed value: 01.01.0001 Alpha 10 digits
N2WHS	Currency	If empty: current standard currency is used	Not transferred
N2TXFL	N2OBID	Currently not used	Not transferred
N2EPID	ID text	Currently not used	Not transferred
N2EDAT	N2STAT	Currently not used	Not transferred
N2APID	User PID creation of record	Currently not used	Not transferred
N2ADAT	*** Date creation of record	Currently not used	Not transferred
N2ZEIT	Time of last change	Currently not used	Not transferred

The different data fields are separated by a semicolon ';'. The data record is finished via CRLF.

Example:

```
001;1008;2015;02;100;36,98;5187;0;0;I;01.01.0001;01.01.0001;
001;1008;2015;02;235;21,45;5187;0;0;I;01.01.0001;01.01.0001;
001;1008;2015;02;420;120,00;5187;0;0;I;01.01.0001;01.01.0001;
001;1008;2015;02;526;5,00;5187;0;0;I;01.01.0001;01.01.0001;
001;1008;2015;02;600;16,00;5187;0;0;I;01.01.0001;01.01.0001;
001;1008;2015;02;RSG;18,33;5187;0;0;I;01.01.0001;01.01.0001;
```

7.30.1.1 Interface configuration

The "VEDA" interface format is then enabled via INI data configuration (called using function button in the toolbar). The following settings are made:

INI data configuration to enable the interface in VEDA format

INI name	HYD-LUG
Section	OPTIONS
Key	XXXXXX
Value	XXXXXX
Active	☒

Key	Value
FORMAT	VEDA Output format
ABSENCES	ON
MONTH	CURRENT
COSTCENTER	ON

Transfer cost centers:

7.30.2 Upload of absences

The data record to transfer absences to VEDA has the following structure:

Field	Name	Comment	Transfer from Hydra
NKFIRM	* Company	Company abbreviation VEDA HR Pay =	Company from HR master data

		recipient company	Alpha 3 digits
NKPRNR	* Personnel number	Target personnel no. for data record	Personnel number from HR master data Numeric 6 digits
NKABRJ	Accounting year	If empty: filled with year entered during transfer	Accounting year Numeric 4 digits (YYYY)
NKABRM	Accounting month	If empty: filled with month entered during transfer	Accounting month Numeric 2 digits (MM)
NKLFNR	Record number		Not transferred
NKFIGR	Company group	Currently not used	Not transferred
NKABGR	Group of accounting	Currently not used	Not transferred
NKEART	* Calendar input type	Valid input type from VEDA HR Entgelt	Absence reason from Control of absences Alpha 1 digit
NKVDAT	*, *** Date from		Start date of the absence 10 digits (DD.MM.YYYY)
NKBDAT	*, *** Date to		End date of the absence 10 digits (DD.MM.YYYY)
NKAEIN	Duration of application/unit	Currently not used	Not transferred
NKAMNG	Duration of application/quantity	Currently not used	Not transferred
NKFEKZ	Failure ID	Currently not used	Not transferred
NKLOKZ	ID of delete		Not transferred
NKSTAT	Status		Not transferred
N2EPID	User PID creation of record	Currently not used	Not transferred
N2EDAT	*** Date creation of record	Currently not used	Not transferred
N2APID	User PID record change	Currently not used	Not transferred
N2ADAT	*** Date of record change	Currently not used	Not transferred
N2ZEIT	Time of last change	Currently not used	Not transferred

Example:

```
001;2407;2015;02;;;U;02.01.2015;05.01.2015;;;;;;;;;
001;2407;2015;02;;;U;07.01.2015;07.01.2015;;;;;;;;;
001;3333;2015;02;;;9;2015-01-01;2015-01-01;;;;;;;;;
001;3333;2015;02;;;9;2015-01-05;2015-01-05;;;;;;;;;
001;96665;2015;02;;;U;02.01.2015;02.01.2015;;;;;;;;;
001;96665;2015;02;;;9;2015-01-05;2015-01-05;;;;;;;;;
001;96665;2015;02;;;9;2015-01-07;2015-01-08;;;;;;;;;
```

8 Set person-related options

The HYD-LUG interface can be customized in different ways for certain organizational characteristics in the HR master record (for example, per company). You distinguish between options that can be different for each person in the interface (**person-related** options) and options that must be identical for the entire interface file (**global** options).

In the configuration, the options that must be identical for the entire interface file (global option) can also be defined for the company of the HR master data. But in this case, the options are identified once in the interface on start of the interface run for the company of the first person and are then valid for all subsequent persons. The company is the only organization characteristic that is supported with global options.

The following **person** options are supported:

MONTH, BALANCES_MONTH, DAY, BALANCES_DAY, DATE, CUSTOMER, COMPANY, COMPANY_SALARIED_EMPLOYEES, COMPANY_NONSALARIED_EMPLOYEES, CONTRACT, CONSULTANT, COSTCENTER, WAGETYPES_DAILY, WAGETYPES_ONCE, ABREKZ, ROUND_MODE.

To make a deviating setting for a specific company, you can add an organization characteristic (=reference) and a value to the section "OPTIONS". Always use capital letters for the value. For example, OPTIONS_FIR_KUS defines the options of the company "KuS".

The following organization characteristics/references are possible for **person-related** options:

Reference	Explanation
FIR	Company from HR master data, value in capital letters!
BER	Area from HR master data, value in capital letters!
ABT	Department from HR master data, value in capital letters!
KST	Cost center from HR master data, value in capital letters!
PKREIS	Employee subgroup from HR master data, value in capital letters!
TAETIGKEIT	Activity from HR master data, value in capital letters!
BESCHVERH	Employment relationship from HR master data. Values: "A" and "G"
NSTMP	Option "Person does not clock" from HR master data. Values: "J" and "N"

Example of a deviating setting of the person-related key CUSTOMER for the company "BSP":

In this example, the deviating client number "4712" is entered for the company "BSP" in the interface.

Note:

You must only enter the deviating settings with person-related options. The other keys are taken over from the general configuration.

9 Interface to Payroll Accounting

Overview

Menu	Human Resources Management → Incentive Wage → Interface to Payroll Accounting
Transaction code	iwipr
Function authorization	iwipr.*


The uploads to the payroll accounting are not performed automatically. The uploads are performed manually. For the upload, the time sheets and the bonuses of all employees are provided in an interface file on the HYDRA server in the HYDRA directory. This interface file covers a period of time that you are free to specify. A new file (hylrueck.dat) is created each time you call the upload function. You can save the file under any name on a data medium using a function key on the HYDRA console. For information on the data record structure of the upload file, refer to the section "Upload of wages" in the HYDRA documentation "Interface to payroll accounting".

If you use the "incentive wage based on formulas", you can define the contents and formats of the interface using custom formulas and scripts that are different to the ones shown in this document.

Note:

While the wage calculation is running, some wage data is not available for other evaluations. For this reason, you cannot create the LLE interface file and run the wage calculation at the same time. A locking mechanism is used to ensure this. In this case, the system does not show the usual screen of the interface file, but a respective warning.

When you have started the evaluation, the interface file is displayed.

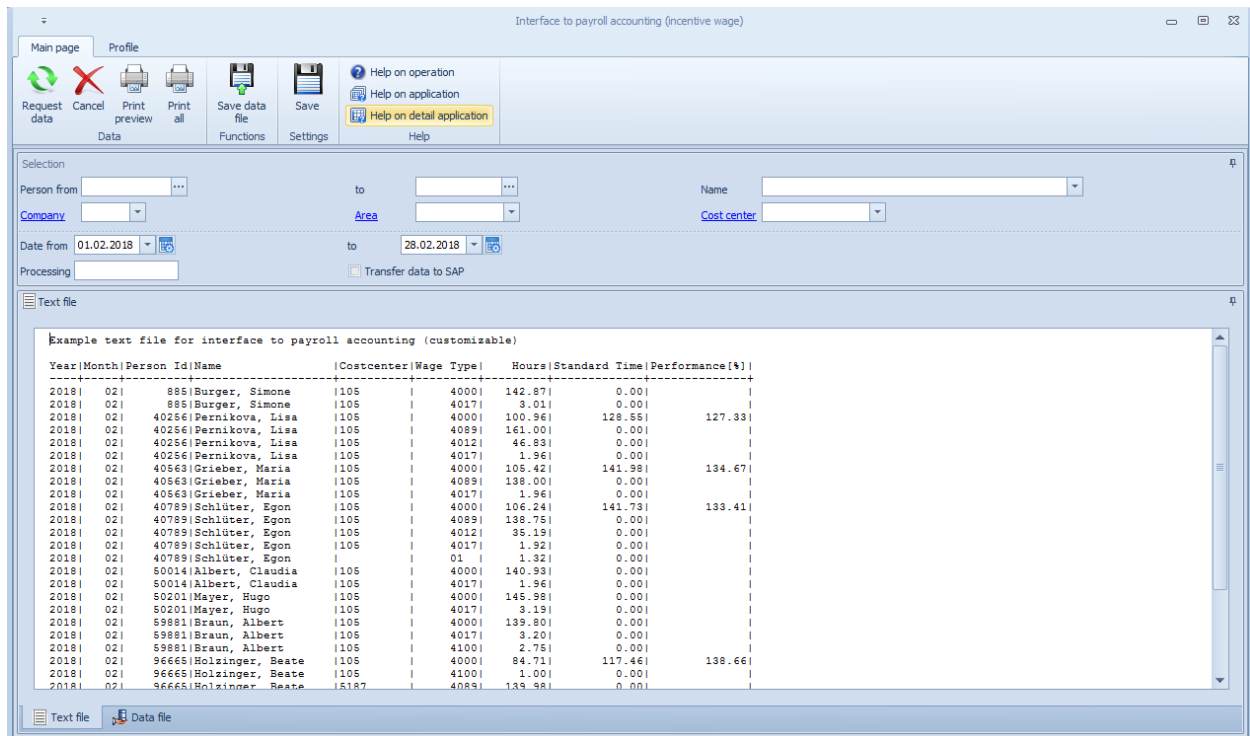

Year	Month	Person ID	Name	Costcenter	Wage Type	Hours	Standard Time	Performance(%)
2018	02	885	Burger, Simone	1105	40001	142.87	0.00	
2018	02	885	Burger, Simone	1105	40171	3.01	0.00	
2018	02	40256	Pernikova, Lisa	1105	40001	100.96	128.55	127.33
2018	02	40256	Pernikova, Lisa	1105	40891	161.00	0.00	
2018	02	40256	Pernikova, Lisa	1105	40121	46.89	0.00	
2018	02	40256	Pernikova, Lisa	1105	40171	1.96	0.00	
2018	02	40563	Grieber, Maria	1105	40001	105.42	141.98	134.67
2018	02	40563	Grieber, Maria	1105	40891	138.00	0.00	
2018	02	40563	Grieber, Maria	1105	40171	1.96	0.00	
2018	02	40789	Schlüter, Egon	1105	40001	106.24	141.73	133.41
2018	02	40789	Schlüter, Egon	1105	40891	138.75	0.00	
2018	02	40789	Schlüter, Egon	1105	40121	35.19	0.00	
2018	02	40789	Schlüter, Egon	1105	40171	1.92	0.00	
2018	02	40789	Schlüter, Egon	1105	01	1.32	0.00	
2018	02	50014	Albert, Claudia	1105	40001	140.99	0.00	
2018	02	50014	Albert, Claudia	1105	40171	1.96	0.00	
2018	02	50201	Mayer, Hugo	1105	40001	145.98	0.00	
2018	02	50201	Mayer, Hugo	1105	40171	3.19	0.00	
2018	02	59881	Braun, Albert	1105	40001	139.80	0.00	
2018	02	59881	Braun, Albert	1105	40171	3.20	0.00	
2018	02	59881	Braun, Albert	1105	41001	2.75	0.00	
2018	02	96665	Holzinger, Beate	1105	40001	84.71	117.46	138.66
2018	02	96665	Holzinger, Beate	1105	41001	1.00	0.00	
2018	02	96665	Holzinger, Beate	15187	40891	139.98	0.00	

Selection criteria

Date from / to

You can create the interface for single days, if required. But usually, the upload is performed for calendar months. The system populates the date fields with beginning and end of the previous calendar month.

If required, the system automatically archives the incentive wage data (time tickets and results of premium groups) in the long-term data area. If you process other data with the "incentive wage based on formulas", e.g. data of the personnel time management, you must ensure via customization that the data is stored for a sufficient period of time.

Transfer data to SAP

If an additional function for the direct upload of data to SAP-HR is active and if this option is enabled, the data is directly uploaded to SAP (update run). If this option is disabled, the data is only displayed on the screen (test run). You can make as many test runs as required before finally upload the data to SAP.

Identification and customization of the source system SOURCE_SYS

Many upload interfaces to SAP include the target SAP system as SOURCE_SYS in the data passed.

When the HR master data has been downloaded in SAP format to HYDRA using the HR-PDC, SAP also transfers the source system of the person. This system is stored in the sixteenth freely configurable info field of the HYDRA HR master data. No further configuration is required.

If the HR master data is maintained in a different way, this entry might not exist. You can then identify the source system for the upload using the ALE configuration in HYDRA (ALE = Application Link Enabling). To this end, the source system of an active logical SAP system is read. You can set this system in HYDRA via INI configuration.

You identify the source system using the following rule and priority. If a source system could be identified using the listed rules in the specified order, then the other rules are not executed.

1) Entry in info field 16 of the HR master data

If an entry is available in this field, this entry is interpreted as source system for the upload.

2) Via logical system from INI configuration for personnel number

Via INI configuration, a logical SAP system is specified for the personnel number:

Name of INI	"HR-LOGSYS"
Section	<i>required logical system</i>
Key	"PNR"
Value	Personnel number of the required person.

The active source system of the logical system is then identified.

3) Via logical system from INI configuration for the company

Via INI configuration, a logical SAP system is specified for the company defined in the HR master data:

Name of INI	"HR-LOGSYS"
Section	<i>required logical system</i>
Key	"FIR"
Value	Company.

The active source system of the logical system is then identified.

4) Via logical system from INI configuration, default entry

Via INI configuration, you can make an entry to generally specify a logical SAP system:

Name of INI	"HR-LOGSYS"
Section	<i>required logical system</i>
Key	"ALL"
Value	"Y"

The active source system of the logical system is then identified.

5) Default identification

The active source system of the logical system "SAP" is identified.

If no source system could be identified using the listed rules, the field remains empty.

Detail applications

You can switch between the display of the text file and the data file. By default, the display is identical. If you use the "incentive wage based on formulas", you can display readable information in the text file via customization by a specialist.

10 Premium/ Incentive Wage Uploads

Wage types are transferred to the payroll or HR information system in the **hylrck.dat** file.

10.1 Data record structure for incentive wage uploads

The interface structure matches that of the PZE interface file except that some of its unused fields are filled in with specific incentive wage data.

Therefore, the information in the **Data type** column has the same meaning as in the PZE interface file, so we will not explain it again here.

This file is structured as follows:

<u>Field/ meaning</u>	<u>Position</u>	<u>Data type</u>
Record type	1	always "760"
Company	4	C3
Area	7	C8
Settlement year	15	N4
Settlement month	19	N2
Settlement number	21	C1 = EMPTY
Personnel number (left justified, filled with EMPTY)	22	C8
Last evaluation day	30	N2
Wage type (left justified, filled with EMPTY)	32	C4
Preceding sign for wage type hours	36	C1 = +
Hours for wage type	37	N5.2
Full days absent	42	N3 = 000
Partial days absent	45	N3 = 000
Different wage group	48	C3 = EMPTY
Different hourly rate	51	N5 = 0
Amount	56	N7 = 0
Year of supplementary payment	63	N4 = Empty
Month of supplementary payment	67	N2 = Empty
Executing (master) cost center	69	C8
Charged cost center	77	C8
Order number	85	C10 = EMPTY
Work sequence	95	C4 = EMPTY
Comments	99	C18 = EMPTY
Premium group	117	C10

Performance efficiency rate	127	N6.3
Reserved for other incentive wage data	133	C9 = EMPTY
Document number	142	C5 = EMPTY
Posting indicator	147	C1 = "1"

10.2 Description of data fields for incentive wage uploads

Company:

The company from HR master data is entered here.

Area:

The area from HR master data is entered here.

Last evaluation day:

The last day of the date selection, e.g. "30" or "31"

Wage type:

Wage type from the personal time tickets

Preceding sign for wage type hour:

Is always "+".

Wage type hours:

Time that is to be posted to the wage type entered in the data record. The two decimal places are stored in industrial minutes.

Full days absent:

Filled in with 000.

Partial days absent:

Filled in with 000.

Year, month of supplementary payment:

Empty.

Executing cost center:

Person's master cost center.

Charged cost center:

Cost center from time tickets. The wage type sum is transferred separately to cost centers.

Order number, work sequence

Unused in the default.

Premium group

Premium group from time ticket. The sum total on the wage types is transferred separately to premium groups.

Performance efficiency rate

The total performance efficiency rate shown on piece-work time tickets for the settlement period is transferred in this field using three decimal places. A performance efficiency rate of 131.234% is converted to 131234 in this field. Six zeros (000000) are transferred on non-piece work time tickets.

10.3 Example file:

1	10	20	30	40	50	60	70	80	90	100	110	120	130	140	147
760BSPLLE	200802	40563	294000+11531000000	000000000000			105	105					122907		1
760BSPLLE	200802	40563	294017+00139000000	000000000000			105	105					000000		1
760BSPLLE	200802	40789	2901 +00464000000	000000000000			105						000000		1
760BSPLLE	200802	40789	294000+11613000000	000000000000			105	105					131619		1
760BSPLLE	200802	40789	294012+03519000000	000000000000			105	105					000000		1
760BSPLLE	200802	40789	294017+00133000000	000000000000			105	105					000000		1

11 Synchronizing File Interfaces

An interface program on an upper-level system (payroll system/ ERP system) assumes the function of preparing the data structures for the transferred files so that they can be processed in batch mode or edited as online transactions.

A handshake logic must be realized between the upper-level system and HYDRA in order to transmit the transfer files so that no data is lost by "overwriting" the transfer files.

Use the following processing method to safely process the files:

1. Rename the interface file into a new file. You do this in Windows NT from the "ren" or "rename" command and in UNIX using the "mv" command.

Please note:

When performing this step, do not use the copy command.

As long as HYDRA is processing the file, it does **not** exist under the documented name.

This ensures that the upper-level system only has access to the file if HYDRA has not yet accessed it (secure handshake).

2. Copy the new file onto the target system.
3. After the new file has been successfully transferred, it must be deleted on the HYDRA server.

A HYD-ZHK module is available on HYDRA with which the automated interfacing can be transferred onto HYDRA. On the PPS system, the files only need to be made available or picked up locally. The files are then actually transferred from and to HYDRA and loaded into the HYDRA database by HYDRA. You can request which technical requirements exactly are needed for this purpose from MPDV project management.