

Manual

Archiving of Batch Data TRT-ARC 8.2

Version 1.0.23372

Last changed on: 23 September 2020

Copyright

©Copyright 2020 All rights reserved.

SAP® and R/3® are registered trademarks of SAP AG.

WINDOWS® is a registered trademark of Microsoft Corporation.

MPDV® and HYDRA® are registered trademarks of MPDV Mikrolab GmbH.

ORACLE® is a registered trademark of ORACLE Corporation, California, USA.

Copying and distribution of this documentation or any part thereof, for any purpose or in any form, is prohibited without prior written permission from MPDV Mikrolab GmbH.

The information contained in this documentation is subject to change without prior notice.

Contents

1	Archiving of Batch Data.....	4
2	Archiving in MPL/TRT	5
3	Data Management.....	11
4	Data Management.....	15
5	Functions/configurations specific to product groups	18
5.1	CAQ	18
5.2	BDE	18
5.3	MDE	18
5.4	WRM.....	18
5.5	PDV	19
5.5.1	Overview	19
5.5.2	Configuration	19
5.6	MPL / TRT	21
5.7	HLS.....	21
5.8	PZE / PZW	21
5.9	PEP.....	21
5.10	LLE	22
5.11	ZKS.....	22
5.12	ESK.....	22
5.13	ETD.....	22
6	Reload Manager.....	23

1 Archiving of Batch Data

Purpose

The function package for Archiving batch/lot data provides access to archived data and, moreover, the possibility to export recorded data and load these data back into the system as needed.

Implementation Considerations

You use the function package for archiving batch/lot data, if:

- You request access to data from the Material and Production Logistics as well as the Tracking & Tracing function packages which was already transferred to archive charts;
- You need to ensure the long-term storage of recorded data due to legal or customer requirements;
- You need to import already exported data back into the system for repeated evaluation/analysis due to legal or customer requirements.

Integration

The function package for archiving batch/lot data provides access to inventory data and recorded data of the Material and Production Logistics as well as the Tracking & Tracing function packages.

The function package for archiving batch/lot data provides access to inventory data and recorded data in the relevant archive tables of the Material and Production Logistics as well as the Tracking & Tracing function packages.

Features

- Direct access to archive tables from the application
 - Direct access to archived batch/lot data via the lot data overview and maintenance as well as tabular and graphical batch/lot tracking (prerequisite: you use the TRT-GLV function package)
- Export function
 - Functions for transferring (exporting) data from the archive tables to external file systems for the purpose of long-term storage of the recorded batch data
- Import function
 - Functions for importing exported data into archive charts for the purpose of evaluating them using the batch data overview and maintenance as well as tabular and graphical batch tracing (prerequisite: you use the TRT-GLV function package).

2 Archiving in MPL/TRT

Overview

In the MPL product group, data is usually kept online for 7 days before it is moved to the long-term data area.

You can access data older than 7 days in a variety of MPL evaluations/reports. For this purpose, MPL postings are provided in a special medium-term or archive area. This data is largely accessed automatically if the selection period exceeds the short-term data area. In a few applications, the option to "Consider long-term data" is provided in the selection area and can be used to access this data.

The MPL archiving integrates the following data:

Object	DB table online area	DB table archive area
Batch inventory	los_bestand	a_los_bestand
Batch attributes	los_attribute	a_los_attribute
Batch assignments	los_zuordnung	a_los_zuordnung
Batch events	event_los	a_event_los
Material movements	event_mlb	a_event_mlb
Batch logs	mpl_los_prot	mpl_a_los_prot
Batch relations	mpl_beziehungen	a_mpl_beziehungen
Document management	hyd_document hyd_documenttext	a_hyd_document a_hyd_documenttext
Change history	hyd_logging hyd_logging_data	a_hyd_logging a_hyd_logging_data

Configuration

Using HYDRA Data Management, you can configure how long data is to be kept in the different data areas.

The transfer of data into archive tables includes the data with a "retention period" that has expired (in number of days/months/years; see the values in parentheses in the table below). If MPL/TRT archiving is not licensed, data will be deleted after the configured retention period.

Product	Object	Object name	Action	Default interval
MPL	LOSDELETE	Archiving of all batches with batch status "D" (deleted). Affected table: los_bestand (v);(a)	Deletion	0 day
MPL	MPLBAHNVERT	Archiving of all cutting plans whose order number does no longer exist in the table auftrag_status. Affected table: auftrag_status (v) mpl_bahnverteilung (a) mpl_bahnlayout (a)	Deletion	0 day
MPL	LOSAB	Archiving of all batches with batch status "A" (processed), that are not assigned to the material status "V" (packed) or that are not at all assigned to a material status (material status = empty) and where the interval has been exceeded. Affected table: los_bestand (v);(a)	Archiving of online data --> archive tables	7 days
MPL	LOSPACKED	Archiving of all batches with batch status "A" (processed), that are assigned to the material status "V" (packed), the associated merged batch does no longer exist and exceeding the interval. Affected table: los_bestand (v);(a)	Archiving of online data --> archive tables	7 days
MPL	A_LOSBESTAND	Archiving of all batches exceeding the interval. Affected table: a_los_bestand (v);(a)	Export of archive table → file system	2 years
MPL	LOSEXPIRED	Archiving of all batches with batch status "V" (expired) and exceeding the interval. Affected table: los_bestand (v);(a)	Archiving of online data --> archive tables	7 days

Product	Object	Object name	Action	Default interval
MPL	A_LOSEXPIRED	Archiving of all batches exceeding the interval. Affected table: a_los_bestand (v);(a)	Export of archive table → file system	3 years
MPL	LOSLEER	Archiving of all batches with a status that is not "L" (running), with zero quantity and exceeding the interval. Affected table: los_bestand (v);(a)	Archiving of online data --> archive tables	7 days
MPL	LOSMATPUF	Archiving of all batches with a status that is not "L" (running), that are not assigned to a material buffer or the assigned material buffer does no longer exist and exceeding the interval. Affected table: los_bestand (v);(a)	Archiving of online data --> archive tables	7 days
MPL	LOSWASTEBASKET	Archiving of all batches with a status that is not "L" (running), that are assigned to a material buffer identified as "recycle bin" and exceeding the interval. Affected table: los_bestand (v);(a)	Archiving of online data --> archive tables	1 day
MPL	LOSTRANSPORT	Archiving of all batches with batch status "T" (transport) Affected table: los_bestand (v);(a)	Archiving of online data --> archive tables	0 day
MPL	LOSZUORD	Archiving of all batch assignments if both batches belonging to the assignment do no longer exist in the table los_bestand. Affected table: los_bestand (v) los_zuordnung (a)	Archiving of online data --> archive tables	-
MPL	A_LOSZUORD	Archiving of all batch assignments if both batches belonging to the assignment do no longer exist in the table a_los_bestand. Affected table: a_los_bestand (v) a_los_zuordnung (a)	Export of archive table → file system	See above

Product	Object	Object name	Action	Default interval
MPL	LOSPROTOKOLL	Archiving of all batch logs with batches no longer existing in the table los_bestand. Affected table: los_bestand (v) mpl_los_prot (a)	Archiving of online data --> archive tables	-
MPL	LOSEVENTMLB	Archiving of all batch events "material movement" with batches no longer existing in the table los_bestand. Affected table: los_bestand (v) event_mlb (a)	Archiving of online data --> archive tables	-
MPL	A_LOSEVENTMLB	Archiving of all batch events "material movement" exceeding the interval. Affected table: a_event_mlb (v);(a)	Export of archive table → file system	2 years
MPL	LOSEVENTMLB2	Archiving of all batch events with a batch number of "null", "", or "@" in the table event_mlb and exceeding the interval. Affected table: event_mlb (v);(a)	Archiving of online data --> archive tables	7 day
MPL	LOSATTRIBUTE	Archiving of all batch attributes with batches no longer existing in the table los_bestand. Affected table: los_bestand (v) los_attribute (a)	Archiving of online data --> archive tables	0 day
MPL	A_LOSATATTRIBUTE	Archiving of all batch attributes with batches no longer existing in the table a_los_bestand. Affected table: a_los_bestand (v) a_los_attribute (a)	Export of archive table → file system	See above
MPL	LOSEVENTLOS	Archiving of all batch events batches exceeding the interval. Affected table: event_los (v);(a)	Archiving of online data --> archive tables	35 day

Product	Object	Object name	Action	Default interval
MPL	LOSRELATIONS	Archiving of all relationship data exceeding the interval. Affected table: mpl_beziehung (v);(a)	Archiving of online data --> archive tables	35 day
MPL	A_LOSRELATIONS	Archiving of all relationship data exceeding the interval. Affected table: a_mpl_beziehung (v);(a)	Export of archive table → file system	2 years
MPL	DOCLINK	Archiving of all hyd_documente with batches no longer existing in the table los_bestand. Affected table: los_bestand (v) hyd_document (a) hyd_documenttext (a)	Archiving of online data --> archive tables	0 day
MPL	A_DOCLINK	Archiving of all hyd_documente with batches no longer existing in the table a_los_bestand. Affected table: a_los_bestand (v) a_hyd_document (a) a_hyd_documenttext (a)	Export of archive table → file system	See above
MPL	CHANGELOG	Archiving of all change logs exceeding the interval. Affected table: hyd_logging (v);(a)	Archiving of online data --> archive tables	35 day
MPL	A_CHANGELOG	Archiving of all change logs exceeding the interval. Affected table: a_hyd_logging (v);(a)	Export of archive table → file system	3 years
MPL	DEMAND	Archiving of material-related requirements Affected table: demand_request (v);(a) demand_acknowledge (v);(a)	Archiving of online data --> archive tables	14 day
MPL	A_DEMAND	Archiving of material-related requirements Affected table: a_demand_request (v);(a) a_demand_acknowledge (v);(a)	Export of archive table → file system	2 years

(v) = table used to compare entries.

(a) = table including the entries to be archived.

Configuration of material-related requirements (interface EIS-WMS)

The objects "DEMAND" and "A_DEMAND" are used with the interface EIS-WMS.

Material-related requirements are identified by the value "L" in field LEVEL in the interface.

For information on the interface EIS-WMS, follow the link: [Interface to Warehouse Management Systems](#).

Product	Object	Object name	Action	Default interval
MPL	DEMAND	Archiving of material-related requirements Affected table: demand_request (v);(a) demand_acknowledge (v);(a)	Archiving of online data --> archive tables	14 day
MPL	A_DEMAND	Archiving of material-related requirements Affected table: a_demand_request (v);(a) a_demand_acknowledge (v);(a)	Export of archive table → file system	2 years

(v) = table used to compare entries.

(a) = table including the entries to be archived.

3 Data Management

Overview

Menu	System administration → Archiving → Data management
Transaction code	arccfg
Function authorization	arccfg.*

Purpose

Use this application to view or change the centrally managed [Archiving](#) settings for recorded data.

Integration

Use this application to configure the settings for archiving / data management for all components/functions.

Field descriptions

Product

Enter the HYDRA product group for which you want to define a rule in the *Product* field.

Object

Use the *Object* to define the data you want to retain.

Retention period

Use the fields for the *Retention period* to define how long data should be available until data is archived.

Unit

Specify the retention period in days, months or years.

Last retention date

This field is computed and specifies the last day when data is still available in this object.

Action

You can choose from three options to specify the processing for an object:

D = delete	Object is deleted
M = move (archive)	Object is transferred to the next area
X = export	Object is unloaded (XUNLOAD format) and then deleted

Target object

Currently, the target object automatically results from the detail configuration.

Condition

The characters in this field are added as an additional condition to the database command that controls the action. This condition is linked to the other conditions of the original command using AND and is set in parentheses.

Last run (date/time)

Indicates the point in time when this rule was applied last.

License

Indicates which license is required for archiving. You can enter several licenses (separated by a space). If none of these licenses is licensed in the system, the data is either deleted (action D) or unloaded into files (action M or X), depending on the relevant action.

Path

Optional path to generate the file export (unload). The archiver currently only supports local HYDRA server drives. If you do not enter a path, file exports are filed as follows:

<HYDRADIR>/<SYSTEM>/custom/archive/<YYYY-MM-DD>/<PRODUCT>/

HYDRADIR ... HYDRA directory

SYSTEM ... System number

YYYY-MM-DD ... Archiving date (YYYY ... Year, MM ... Month, DD ... Day)

PRODUCT ... Product group from archiving configuration

Administration table

Name of the administration table where archiving logs are stored.

Administration duration (retention period of administration table)

Use the fields for the *retention period* to specify how long the logs should be available in the administration table before being deleted.

Unit

Specify the retention period in days, months or years.

Archiving step

Specifies if this archiving process uses archiving function I or II. Archiving function I: The function moves data from the online data set to archive tables or deletes the data: setting M (medium-term archive). Archiving function II: The function moves data from the archive table to the file export or deletes the data: setting L (long-term archive).

Configuration

Indicates whether or not the configuration is active. Possible values: Y/N

Archiving type

Identifier for time or object-related archiving. Supported modes: O = Object-related archiving (i.e. data is archived for each object individually). Z = Time-related archiving (i.e. data is archived without any object reference).

Note: Time and object-related archiving differ from each other significantly in the archiving performance (runtime). Object-related archiving of mass data is not recommended.

Priority

Integral value greater than 0. Indicates the processing sequence if several objects are defined for a product group. Processing starts with the lowest value.

Master table

Table including the data to be archived. The extensions entered in the *Condition* field refer to this table.

Date column

Date column in the master table. The system uses this date column to evaluate the retention period for the data to be archived.

Key 1

Unique key column in the master table; this key identifies the data to be archived. You can define up to 5 key columns for object-related archiving. Time-related archiving only supports one primary key in *Key 1*.

Keys 2 – 5

Additional optional key columns for object-related archiving.

Comment

Use the comment line to describe the archiving configuration.



If you copy the archiving configuration, the system currently only copies the data management configuration, but no defined data records from the object details. Currently, you must use the respective dialog to copy the data records of the object details to the new configuration.

Module	Version(s)	Description of archiving
BDE	8.1	See here
CAQ	8.1	See here
LLE	8.1	See here
MDE	8.1	See here
MPL	8.1	See here

PEP	8.1/8.2	See here
PZE/PZW	8.1/8.2	See here
ZKS	8.1/8.2	See here

4 Data Management

Overview

HYDRA menu	System administration → Archiving → Data management
FEDRA menu	System administration → Archiving → Data management
Transaction code	arccfg
Function authorization	arccfg.*

Purpose

You use this application to view or change the centrally managed archiving settings of recorded data.

Integration

Use this application to configure the settings for archiving / data management for all components/functions.

Field descriptions

Product

Enter the system module for which you want to define a rule.

Object

Use the *Object* to define the data you want to retain.

Retention period

Use the fields for the *Retention period* to define how long data should be available until data is archived.

Unit

Specify the retention period in days, months or years.

Last retention date

This field is computed and specifies the last day when data is still available in this object.

Action

You can choose from three options to specify the processing for an object:

D = delete	Object is deleted
M = move (archive)	Object is transferred to the next area
X = export	Object is unloaded (XUNLOAD format) and then deleted

Target object

Currently, the target object automatically results from the detail configuration.

Condition

The characters in this field are added as an additional condition to the database command that controls the action. This condition is linked to the other conditions of the original command using AND and is set in parentheses.

Last run (date/time)

Indicates the point in time when this rule was applied last.

License

Indicates which license is required for archiving. You can enter several licenses (separated by a space). If none of these licenses is licensed in the system, the data is either deleted (action D) or unloaded into files (action M or X), depending on the relevant action.

Path

Optional path to generate the file export (unload). The archiver currently only supports local HYDRA server drives. If you do not enter a path, file exports are filed as follows:

<HYDRADIR>/<SYSTEM>/custom/archive/<YYYY-MM-DD>/<PRODUCT>/

HYDRADIR HYDRA directory

SYSTEM ... system number

YYYY-MM-DD ... archiving day (YYYY ... year, MM ... month, DD ... day)

PRODUCT ... product from archiving configuration

Administration table

Name of the administration table where archiving logs are stored.

Administration duration (retention period of administration table)

Use the fields for the *retention period* to specify how long the logs should be available in the administration table before being deleted.

Unit

Specify the retention period in days, months or years.

Archiving step

Specifies if this archiving process uses archiving function I or II. Archiving function I: The function moves data from the online data set to archive tables or deletes the data: setting M (medium-term archive). Archiving function II: The function moves data from the archive table to the file export or deletes the data: setting L (long-term archive).

Configuration

Indicates whether or not the configuration is active. Possible values: Y/N

Archiving type

Identifier for time or object-related archiving. Supported modes: O = Object-related archiving (i.e. data is archived for each object individually). Z = Time-related archiving (i.e. data is archived without any object reference).

Note: Time and object-related archiving differ from each other significantly in the archiving performance (runtime). Object-related archiving of mass data is not recommended.

Priority

Integral value greater than 0. Indicates the processing sequence if several objects are defined for a product group. Processing starts with the lowest value.

Master table

Table including the data to be archived. The extensions entered in the *Condition* field refer to this table.

Date column

Date column in the master table. The system uses this date column to evaluate the retention period for the data to be archived.

Key 1

Unique key column in the master table; this key identifies the data to be archived. You can define up to 5 key columns for object-related archiving. Time-related archiving only supports one primary key in *Key 1*.

Keys 2 – 5

Additional optional key columns for object-related archiving.

Comment

Use the comment line to describe the archiving configuration.



If you copy the archiving configuration, the system currently only copies the data management configuration, but no defined data records from the object details. Currently, you must use the respective dialog to copy the data records of the object details to the new configuration.

5 Functions/configurations specific to product groups

5.1 CAQ

For information on the data management configurations of CAQ 8.1, refer to the document [MBL_Archiving_CAQ.pdf](#).

5.2 BDE

For information on the data management configurations of BDE 8.1/BDE 8.2, refer to the document [MBL_Archiving_BDE.pdf](#).

5.3 MDE

For information on the data management configurations of MDE 8.1/MDE 8.2, refer to the document [MBL_Archiving_MDE.pdf](#).

5.4 WRM

For information on the data management configurations of WRM 8.1/WRM 8.2, refer to the document [MBL_Archiving_WRM.pdf](#).


5.5 PDV

5.5.1 Overview

The standard archiving function of HYDRA-PDV 7.2 can archive mass data tables. The system writes table data into files that are stored using a defined path.

Mass data tables (also called TNT tables) include a time stamp in their name ID that is used during archiving.

The table "tnt_table_repo" provides information on the archiving status of the single TNT tables, e.g. information on the location and the name of the data file, or on an eventual re-import of the table that might require a new export.

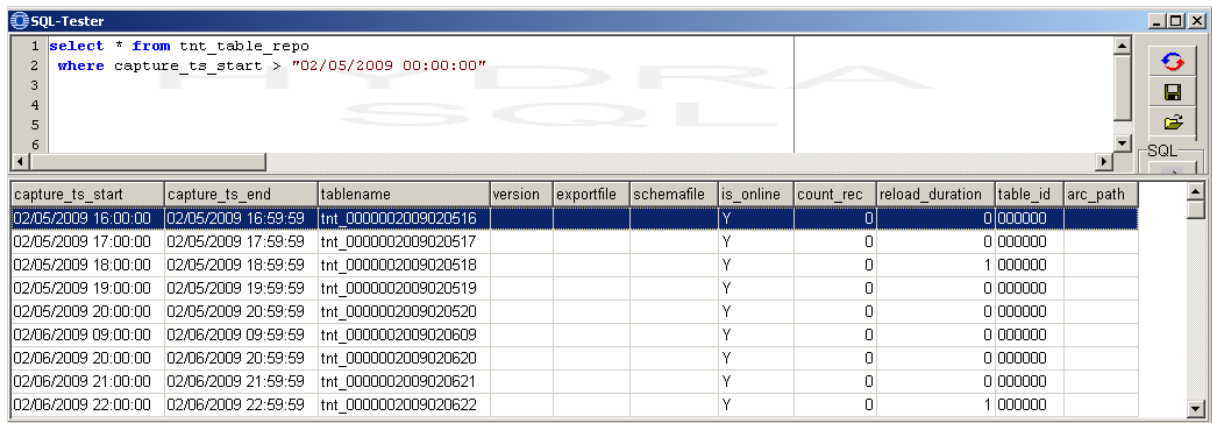

The screenshot shows the SQL-Tester application window. The query editor contains the following SQL query:

```
1 select * from tnt_table_repo
2 where capture_ts_start > "02/05/2009 00:00:00"
3
4
5
6
```

The results pane displays a table with the following data:

capture_ts_start	capture_ts_end	tablename	version	exportfile	schemafilename	is_online	count_rec	reload_duration	table_id	arc_path
02/05/2009 16:00:00	02/05/2009 16:59:59	tnt_0000002009020516				Y	0	0	000000	
02/05/2009 17:00:00	02/05/2009 17:59:59	tnt_0000002009020517				Y	0	0	000000	
02/05/2009 18:00:00	02/05/2009 18:59:59	tnt_0000002009020518				Y	0	1	000000	
02/05/2009 19:00:00	02/05/2009 19:59:59	tnt_0000002009020519				Y	0	0	000000	
02/05/2009 20:00:00	02/05/2009 20:59:59	tnt_0000002009020520				Y	0	0	000000	
02/06/2009 09:00:00	02/06/2009 09:59:59	tnt_0000002009020609				Y	0	0	000000	
02/06/2009 20:00:00	02/06/2009 20:59:59	tnt_0000002009020620				Y	0	0	000000	
02/06/2009 21:00:00	02/06/2009 21:59:59	tnt_0000002009020621				Y	0	0	000000	
02/06/2009 22:00:00	02/06/2009 22:59:59	tnt_0000002009020622				Y	0	1	000000	

Patch:

The standard HYDRA-PDV 7.2 installation provides the option to archive mass data, thus TNT tables.

- DBPATCH PDV_72 (includes the "pdv_setup" table)
- DBPATCH TNT_72 (includes the "tnt_table_repo" table)

License:

Lizenz	Produktbezeichnung	Kategorie	Produkt	Anzahl	Gültig bis	Release
	PDV	HYDRA	PDV-ARC	1		7.2

5.5.2 Configuration

Mass data is archived via two components: export and import.

The export is performed at cyclic intervals and is started by the system scheduler. The export unloads “due” tables from the database into data files on hard disk.

The import (or reload) function is a kind of library. If required, you use this function to reload data from the data files back to the database tables.

In general, the export function transfers the files one-to-one from the database into the data files. You can also configure a one-to-many relationship, i.e. you can distribute a table among several files. Vice versa, a file must belong to exactly one table (one table can have several files, but a file always refers to exactly one table).

Program: hp_mexp.exe / out

Installation: The program is entered in the system Scheduler and started cyclically.

Console menu: File – System administration – Scheduler

The corresponding time, when the program is to be started can be defined in the “fix” tab.

Important: You should not start the export program at little intervals in the Scheduler, because it is an archiving program. Depending on the data volume, a daily (each night) or weekly rhythm is enough.

You must also define a parameter that specifies when the data is old enough to be archived. Here, the parameter refers to the number of tables that may be online. If this number is exceeded, the oldest TNT tables are archived via export. The parameter is included in the “pdv_setup” table. You can change the parameter in the basic settings of the console, in tab “PDV”.

As part of the implementation process, it has to be checked if the archiving path with ID “PDVARC” exists in the “arc_path” column of the “pdv_setup” table (and, if required, if the transport path has been defined with the ID “PDVTRANS” in the “trans_path” column).

You can then use the table “hy_path” to find the respective directories.

You may not define a host if a relative URL path is defined for archiving, PDVARC, (depending on the file hp_mexp.scr).

As part of a customization, you can also archive further data (e.g. events). To this end, you must store the respective entries in the table "hyd_datamanagement". The process is identical to the one of the general archiving.

5.6 MPL / TRT

For information on the data management configurations of MPL or TRT in versions 8.1 or 8.2, refer to the document [MBL_Archiving_MPL.pdf](#).

5.7 HLS

For information on the data management configurations of HLS 8.1, refer to the document [MBL_Archiving_HLS.pdf](#).

5.8 PZE / PZW

For information on the data management configurations of PZE or PZW in versions 8.1 or 8.2, refer to the document [MBL_Archiving_PZW.pdf](#).

5.9 PEP

For information on the data management configurations of the Personnel Scheduling PEP in versions 8.1 or 8.2, refer to the document [MBL_Archiving_PEP.pdf](#).

5.10 LLE

For information on the data management configurations of the Incentive Wage LLE 8.1, refer to the document [MBL_Archiving_LLE.pdf](#).

5.11 ZKS

For information on the data management configurations of the Access Control ZKS in versions 8.1 or 8.2, refer to the document [MBL_Archiving_ZKS.pdf](#).

5.12 ESK

For information on the data management configurations of the Escalation Management in version 3.0, refer to the document [MBL_ESK_Archiving.pdf](#).

5.13 ETD

For information on the data management configurations of the Label Design in version 3.0, refer to the document [MBL_Archiving_ETD.pdf](#).

6 Reload Manager

Summary

HYDRA menu	System administration → Archiving → Reload manager
FEDRA menu	System administration → Archiving → Reload manager
Transaction code	arcrlid
Function authorization	arcrlid arcrlid.export arcrlid.import

Purpose

The customer is responsible for backing up data in a data archive and for restoring data. When data is backed up it is transferred from the long-term data area to the archive data area and, as a result, it is stored in a separate file system. The customer can start the backup process using the Reload Manager.

When data, which is filed in the archive data area, is restored, it is transferred back (copied) to the long-term data area. The customer has to do this and bears the responsibility.

To be able to evaluate restored data using standard evaluations/reports, the data has to be transferred back (copied) to the reload data area.

For this reason, the Reload Manager enables the following functions:

1. Moving of exported data into the customer archive (the customer archive path has to be defined within the HYDRA path settings).
2. Loading of exported data into the reload area for evaluations

Integration

The Reload Manager is a central function that is used by many components or functions.

Selection Criteria

The application provides the following selection criteria:

Module

Reference to the product group which archived data belongs to.

Object type

Object type of the archived data.



The selection options “module” and “object type” are mandatory fields.

Toolbar

Export

The “EXPORT” button allows for the entries selected in the Reload Manager to be exported to the customer directory (all data records can be selected using the context menu of the right mouse button). Once the function has been started, the input dialog that opens requires the customer archive path to be entered.

Import

The “IMPORT” button allows for the selected entries to be loaded into the reload area, in order for the data to be again available for HYDRA evaluations/reports. Once the function has been started, the data loading mode and an optional path are requested. By indicating the path, it is possible to specify another storage location for the files, provided that the archived files have not been moved to the customer-specific archive using the Reload Manager.

There are three different ways to deal with reload data after they have been reloaded to prevent the reload data set from increasing excessively (→ no slow evaluations/reports):

The following modes are distinguished:

- **Cyclic**
Data is loaded to the reload area in the “cyclic” mode. Loaded data is automatically removed from the corresponding reload tables, once the retention period specified within archive settings has expired.
Please compare the configuration entry HYD / RELOADMANAGER of the data management function. When demo settings are used, data is removed from the reload area after 14 days.

When data is imported, the `HYD_REL_MANAGEMENT.DELETE_DATE` field is calculated subject to the configuration and entered in the reload management table.

- **User-specific**
Data is loaded to the reload area in the “user-specific” mode. The loaded data is automatically removed from the corresponding reload area, once the time specified for the user within the user-specific settings has expired. Exception: In case several users loaded identical data into the reload area, the corresponding retention period is automatically set to the maximum date.
When data is imported, the `HYD_REL_MANAGEMENT.DELETE_DATE` field is computed subject to the configuration and entered in the reload management table.

- Manual

Data is loaded in the “manual” mode to the reload area. The customer is responsible for deleting data from corresponding reload tables. However, identical data cannot be loaded several times in the “manual” mode (data can be loaded in the “user-specific” mode though).

In order for data to be transferred to the reload data area, the HYDRA server must be able to access these files. Otherwise, loading is cancelled with an error message.