

Manual

HYDRA@Web Absence Workflow WEB-WFG 8.2

Version 1.0.23049

Last changed on: 02.09.2020

Copyright

©Copyright 2020 All rights reserved.

SAP® and R/3® are registered trademarks of SAP AG.

WINDOWS® is a registered trademark of Microsoft Corporation.

MPDV® and HYDRA® are registered trademarks of MPDV Mikrolab GmbH.

ORACLE® is a registered trademark of ORACLE Corporation, California, USA.

Copying and distribution of this documentation or any part thereof, for any purpose or in any form, is prohibited without prior written permission from MPDV Mikrolab GmbH.

The information contained in this documentation is subject to change without prior notice.

Contents

1	HYDRA@Web Absence Workflow - Summary	4
2	Configuration Absence Workflow	5
3	Replacements	16
4	Request Absences	19
5	Absence Planning in WEB	22

1 HYDRA@Web Absence Workflow - Summary

Purpose

With this function package, employees may request absence times in the Intranet or Internet. In addition, supervisors can also approve or reject their employees' requests by means of a web application.

Implementation notes

The function package is used if:

- you wish to map the requests and approvals of absence times via web applications.

Integration

This function package can only be used if absence planning is performed in HYDRA (function package Assessment of labor time and/or Labor time planning).

Features

- HYDRA@Web Absence Requests
 - Calendar for display of requested and planned absence times of employees
 - Requesting of absence times and withdrawal of requests
 - Planning of absence times not requiring a request
- HYDRA@Web Absence Planning
 - Calendar for display of requested and planned absence times of employees
 - Requesting of absence times and withdrawal of requests
 - Planning, processing and deletion of absence times not requiring a request

2 Configuration Absence Workflow

Overview

Employees can use the absence workflow to request absences via Internet and/or Intranet. When a request has been filed, the supervisor is informed and can then approve or reject the request. The employee receives a notification via e-mail or on the terminal if the absence request was approved or not.

The settings for the absence workflow are configured in different applications on the MOC:

Configuration – Basic Settings

Menu	System administration → System settings → Basic settings
Transaction code	setup
Function authorization	setup

In the tab *ESK* of the application [Basic settings](#), the e-mail server must be entered so that notifications for absence times and their approval and/or rejection can be forwarded to the employees by e-mail:

The screenshot shows the 'Basic settings' application window with the 'ESK' tab selected. The configuration fields are as follows:

Field	Value
SMTP server	smtp.bsp.intern
Port	0
Timeout	0 [ms]
Sender	automail@bsp.de
SMS path	SMS
Pager path	PAGER

Field descriptions

It is important to specify the IP address of the SMTP server and the sender of the mails that are sent.

SMTP server

To send e-mails, enter the IP address or name of the local SMTP server in the *SMTP server* field.

Sender

You can enter a central e-mail account. E-mails sent via HYDRA Escalation Management will then have this central account as sender.

Event configuration in the Escalation Management

Menu	Master data → Escalation management → Escalation configuration
Transaction code	esccfg
Function authorization	esccfg

You store the events for requesting, approving and rejecting absences in the [Escalation configuration](#):

The screenshot displays the 'Escalation configuration' window. The left pane shows a list of events with columns: Reference, Event, Designation, Recipient t..., Recipient, Priority, Color, Active, and ESK mode. The right pane shows the configuration for the selected event 'DB.FILL_LEVEL_EXCEEDED'. The configuration includes fields for Designation, Recipient type, Recipient, Priority, Color, and Active status. Below the configuration panel, there are sections for 'Cyclic monitoring', 'Automatic: after reading the message', 'Automatic: after closing the event', and 'Automatic: after sending the message'.

Field descriptions

Event


FZ.APPLICATION_FILED -> triggered when an absence is requested.

FZ.APPLICATION_ALLOWED -> triggered after approval of an absence request.

FZ.APPLICATION_REJECTED -> triggered after rejection of an absence request.

FZ.APPLICATION_WITHDRAWN -> triggered after withdrawal of an absence request by an employee.

Event tab for FZ.APPLICATION_FILED

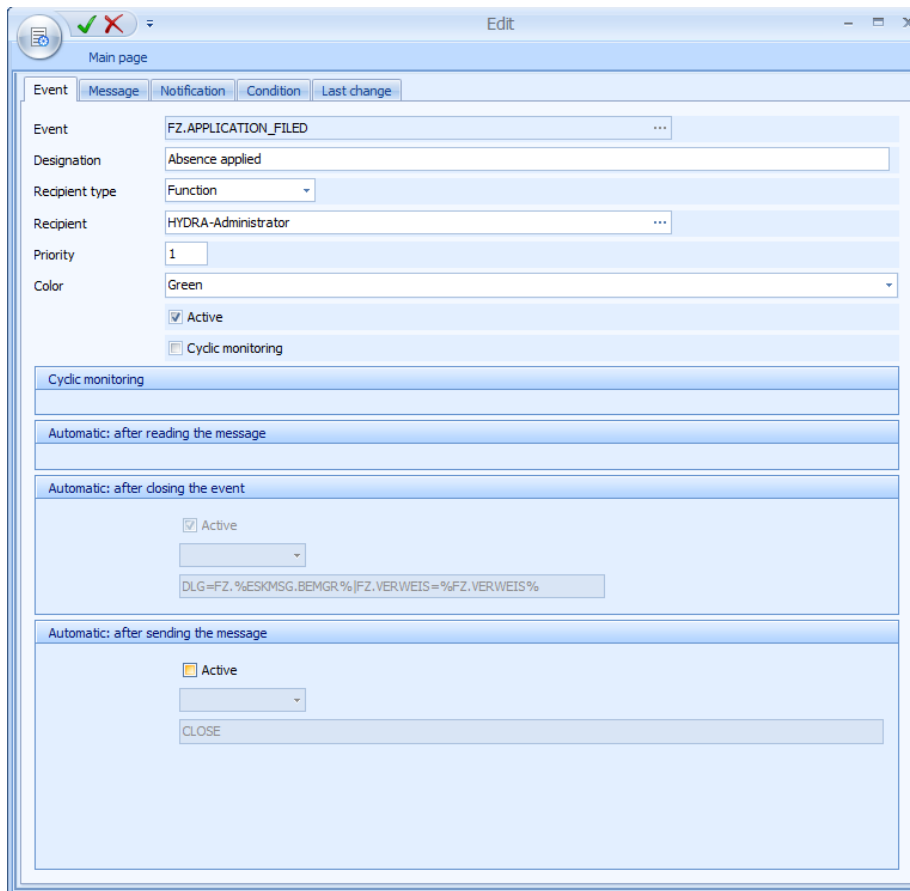


The screenshot shows the 'Event' tab for the event 'FZ.APPLICATION_FILED'. The form is titled 'Main page' and has tabs for 'Event', 'Message', 'Notification', 'Condition', and 'Last change'. The 'Event' tab is selected. The form contains the following fields:

- Event: FZ.APPLICATION_FILED
- Designation: Absence applied
- Recipient type: Function
- Recipient: HYDRA-Administrator
- Priority: 1
- Color: Green
- ☒ Active
- ☐ Cyclic monitoring

Below these fields are three sections for automatic actions:

- Cyclic monitoring:** (Empty)
- Automatic: after reading the message:** (Empty)
- Automatic: after closing the event:**
 - ☒ Active
 - DLG=FZ. %ESKMSG.BEMGR%|FZ.VERWEIS=%FZ.VERWEIS%
- Automatic: after sending the message:**
 - ☐ Active
 - CLOSE

Event tab for FZ.APPLICATION_ALLOWED

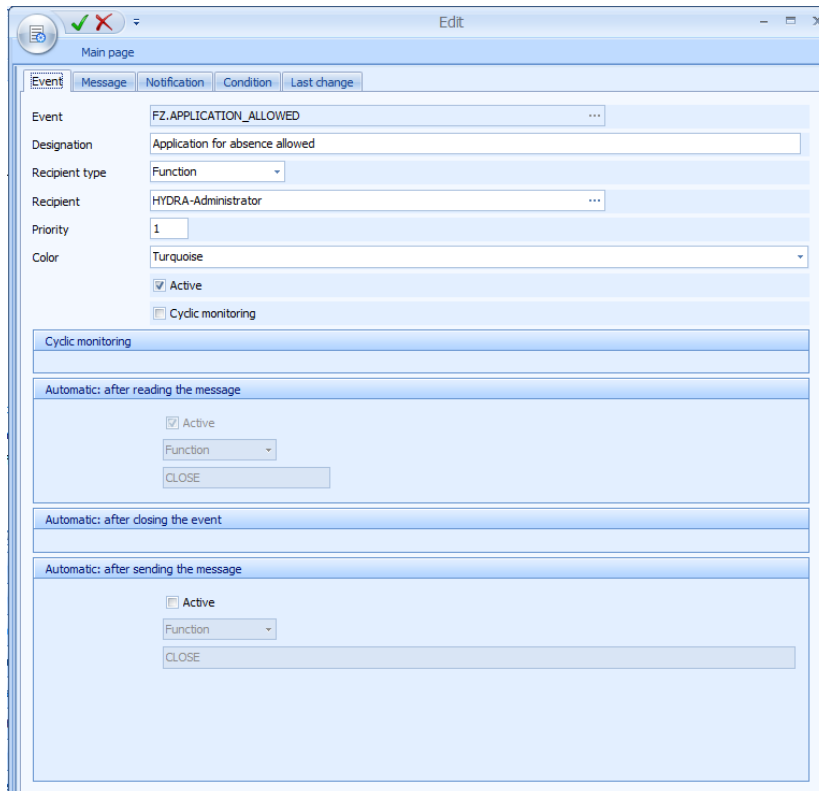


The screenshot shows the 'Event' tab for the event 'FZ.APPLICATION_ALLOWED'. The form is titled 'Main page' and has tabs for 'Event', 'Message', 'Notification', 'Condition', and 'Last change'. The 'Event' tab is selected. The form contains the following fields:

- Event: FZ.APPLICATION_ALLOWED
- Designation: Application for absence allowed
- Recipient type: Function
- Recipient: HYDRA-Administrator
- Priority: 1
- Color: Turquoise
- ☒ Active
- ☐ Cyclic monitoring

Below these fields are three sections for automatic actions:

- Cyclic monitoring:** (Empty)
- Automatic: after reading the message:**
 - ☒ Active
 - Function
 - CLOSE
- Automatic: after closing the event:** (Empty)
- Automatic: after sending the message:**
 - ☐ Active
 - Function
 - CLOSE

Event tab for FZ.APPLICATION_REJECTED

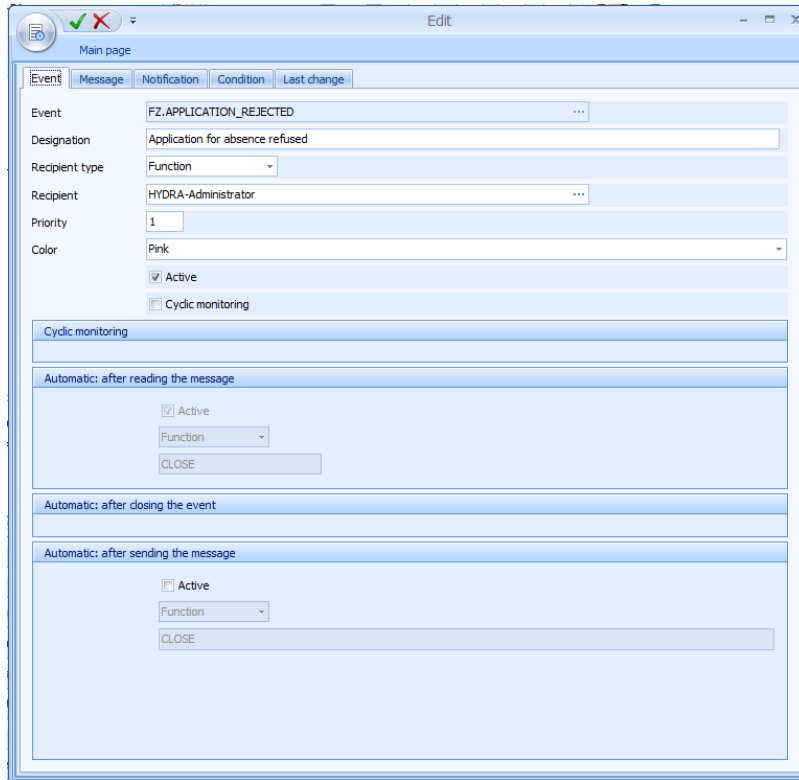


The screenshot shows the 'Event' tab configuration for 'FZ.APPLICATION_REJECTED'. The 'Designation' is 'Application for absence refused'. The 'Recipient type' is 'Function'. The 'Recipient' is 'HYDRA-Administrator'. The 'Priority' is '1'. The 'Color' is 'Pink'. The 'Active' checkbox is checked. The 'Cyclic monitoring' checkbox is unchecked. The 'Automatic: after reading the message' section has the 'Active' checkbox checked. The 'Automatic: after closing the event' section is empty. The 'Automatic: after sending the message' section has the 'Active' checkbox unchecked.

Event tab for FZ.APPLICATION_WITHDRAWN

The entries in the *Message* and *Notification* tabs have the same settings as the approval of an absence request.

Message tab

You can define the subject and text of the message in the *Message* tab

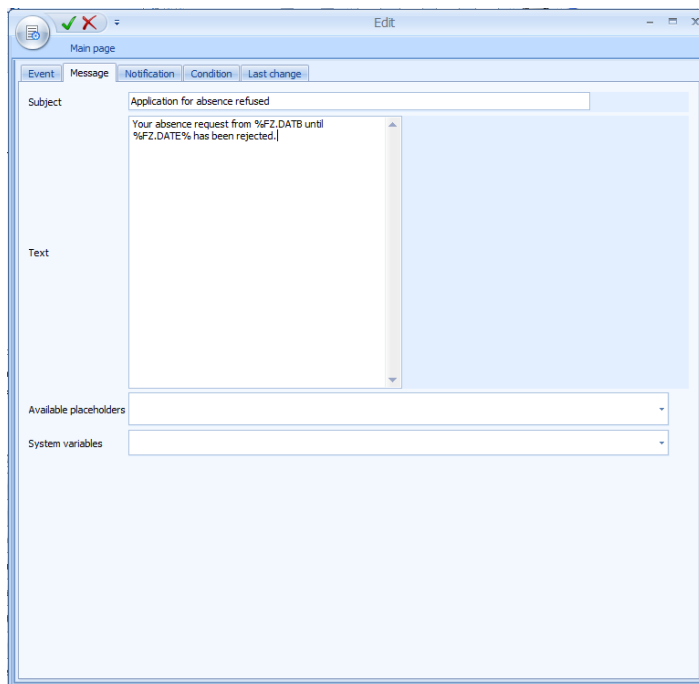

The screenshot shows the 'Message' tab configuration. The 'Subject' is 'Application for absence refused'. The 'Text' is 'Your absence request from %FZ.DATB until %FZ.DATE% has been rejected.' The 'Available placeholders' and 'System variables' dropdowns are empty.

Examples:

Person %FZ.PNR% %FZ.NAME:PNR% has requested %FZ.BEZL:ENTLTMOD% from %FZ.DATB date dd.mm.yyyy% to %FZ.DATE date dd.mm.yyyy%.

Your absence request for the period from %FZ.DATB date dd.mm.yyyy% to %FZ.DATE date dd.mm.yyyy% absence %FZ.ENTLTMOD% %FZ.BEZL:ENTLTMOD% has been approved.

Your absence request for the period from %FZ.DATB date dd.mm.yyyy% to %FZ.DATE date dd.mm.yyyy% absence %FZ.ENTLTMOD% %FZ.BEZL:ENTLTMOD% has been rejected.

The following placeholders are available for creating the message:


Event	Acronyms	Description
FZ.APPLICATION_FILED FZ.APPLICATION_ALLOWED FZ.APPLICATION_REJECTED FZ.APPLICATION_WITHDRAWN	FZ.DATB	Start date
	FZ.BEZL	Comment
	FZ.BEZL:ENTLTMOD	Absence designation
	FZ.VERWEIS	Unique record number
	FZ.DATE	End date
	FZ.ENTLTMOD	Absence payment
	FZ.FIR	Company from the absence planning
	FZ.BEZX:ENTLTMOD	Absence abbreviation
	FZ.PNR	Personnel number
	FZ.NAME:PNR	Person's name
	FZ.PNAME	Last name
	FZ.PVORNAME	First name
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	E-mail (business)
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	The person's activity
	PNR.PNR:VGS	The supervisor's personnel number
	FZ.KAT	Absence category
	FZ.DAT:APPLY	Date of request
	FZ.ZEI:APPLY	Period of request
FZ.APPLICATION_ALLOWED FZ.APPLICATION_REJECTED	FZ.BEARB	Modified by
	FZ.NAME:BEARB	Editor name

Event	Acronyms	Description
FZ.APPLICATION_REJECTED	FZ.ESK:BEM	Reason of reject <i>This variable is only available on the HYDRA systems with at least Service Pack 9 (2016).</i>

Notification tab

You can configure how the message is sent in the *Notification* tab. You can see in the example below, that the notification is sent to the console (MOC) where the supervisor is logged on, and additionally by e-mail.

If the e-mail notification type is active, an additional field is shown. You can enter one or more valid e-mail addresses, separated by a comma, in the *Send e-mail by CC to* field. When the e-mail is sent to the recipient of the escalation, a copy goes to the CC addressee(s):

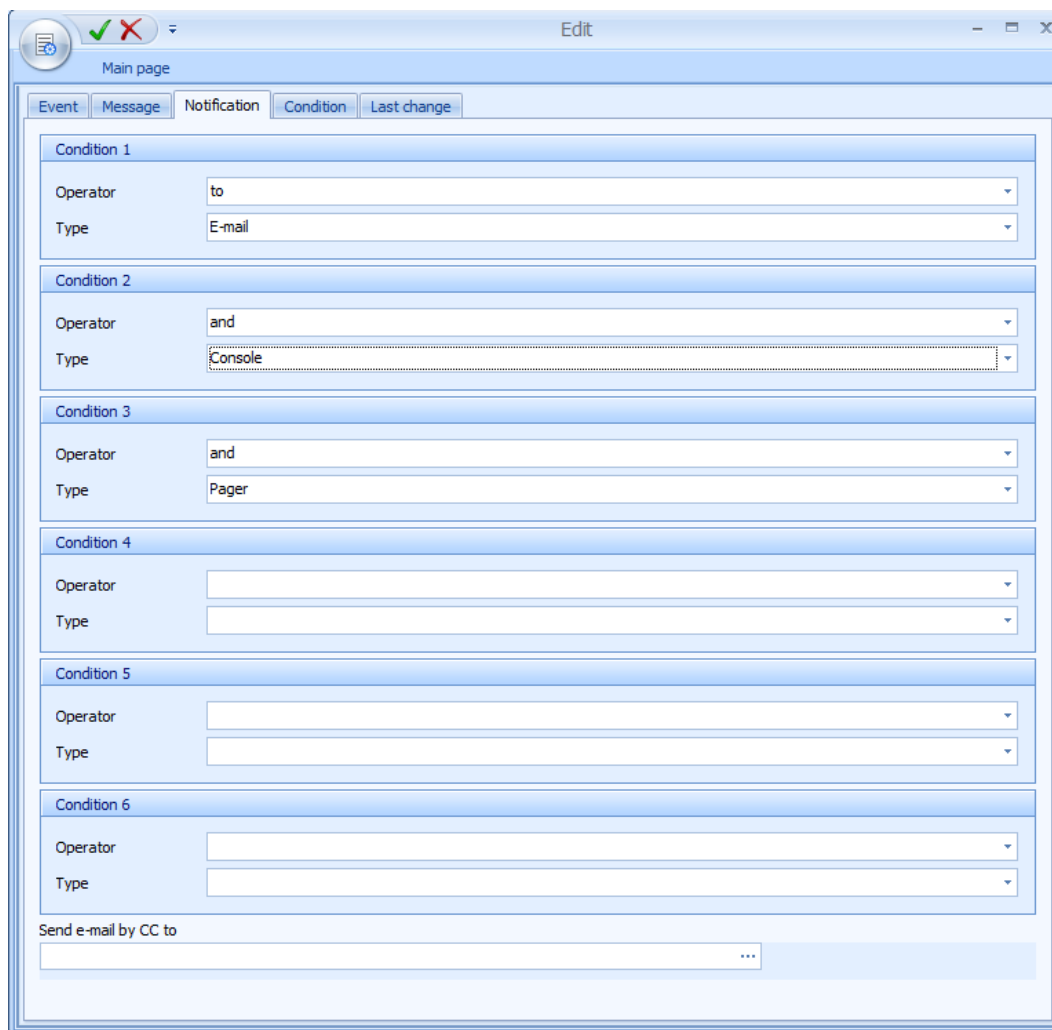



If a message cannot be sent to the recipient of the escalation by e-mail, no copy is sent to the CC addressee, either. This could be the case if he/she does not have any e-mail address. No e-mail notification is required for employees for whom no e-mail address is entered in the personnel master record.



This notification type is configured in a way that the message is displayed only once on the PZE terminal and is removed after a maximum of 4 weeks. However, the message can be displayed several times during the period of the cyclic loading of authorizations. The message is displayed with the following actions on the PZE terminal: In, out, break, info, message and absence reason.

Messages can only be displayed on terminals of the type CT-36x, CT-37x and CT-38x.


Data retention of escalations

By default, escalations are stored for 30 days. With absence requests, you must usually extend this period so that the request is still displayed when the absence only starts half a year later, for example.

Supervisor and E-mail Address Configuration

Menu	Master data → Staff → HR master data
Transaction code	Pers
Function authorization	Pers


The person's supervisor is entered in the *Person* tab of the [HR master data](#). Absence times requested in the workflow are forwarded to this supervisor.

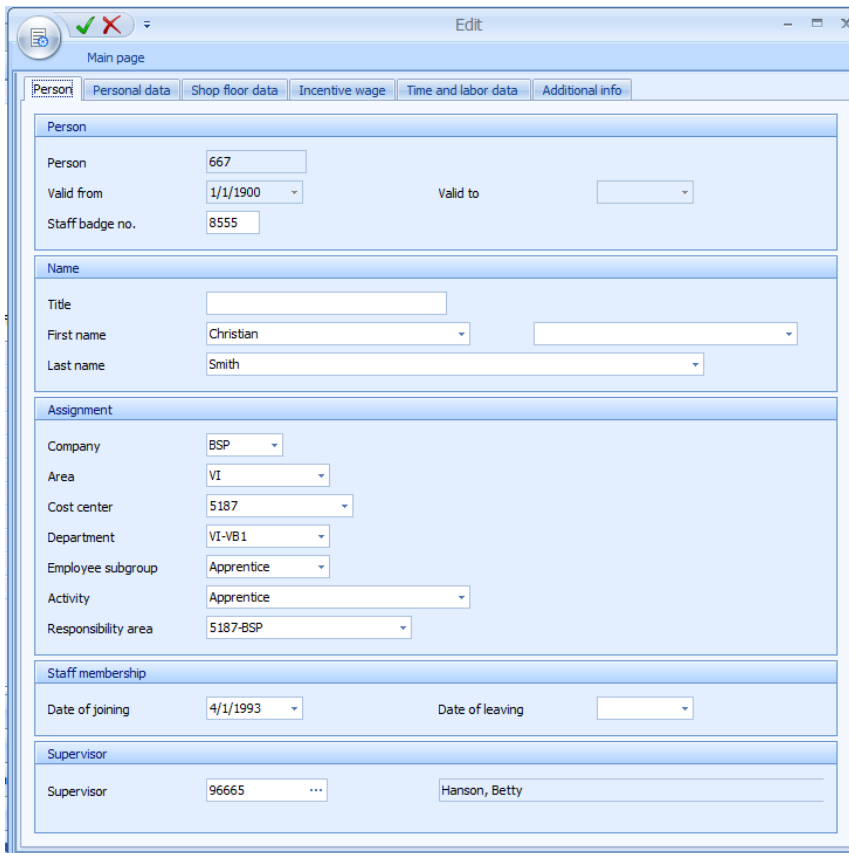

The screenshot shows a web application window titled 'Edit' with a 'Main page' tab. The 'Person' tab is selected, displaying the following information:

- Person:**
 - Person: 667
 - Valid from: 1/1/1900
 - Valid to: (empty)
 - Staff badge no.: 8555
- Name:**
 - Title: (empty)
 - First name: Christian
 - Last name: Smith
- Assignment:**
 - Company: BSP
 - Area: VI
 - Cost center: 5187
 - Department: VI-VB1
 - Employee subgroup: Apprentice
 - Activity: Apprentice
 - Responsibility area: 5187-BSP
- Staff membership:**
 - Date of joining: 4/1/1993
 - Date of leaving: (empty)
- Supervisor:**
 - Supervisor: 96665 ... Hanson, Betty

Enter the e-mail address in the *Company e-mail* field in the *Personal Data* tab for employees and supervisors that are notified by e-mail.

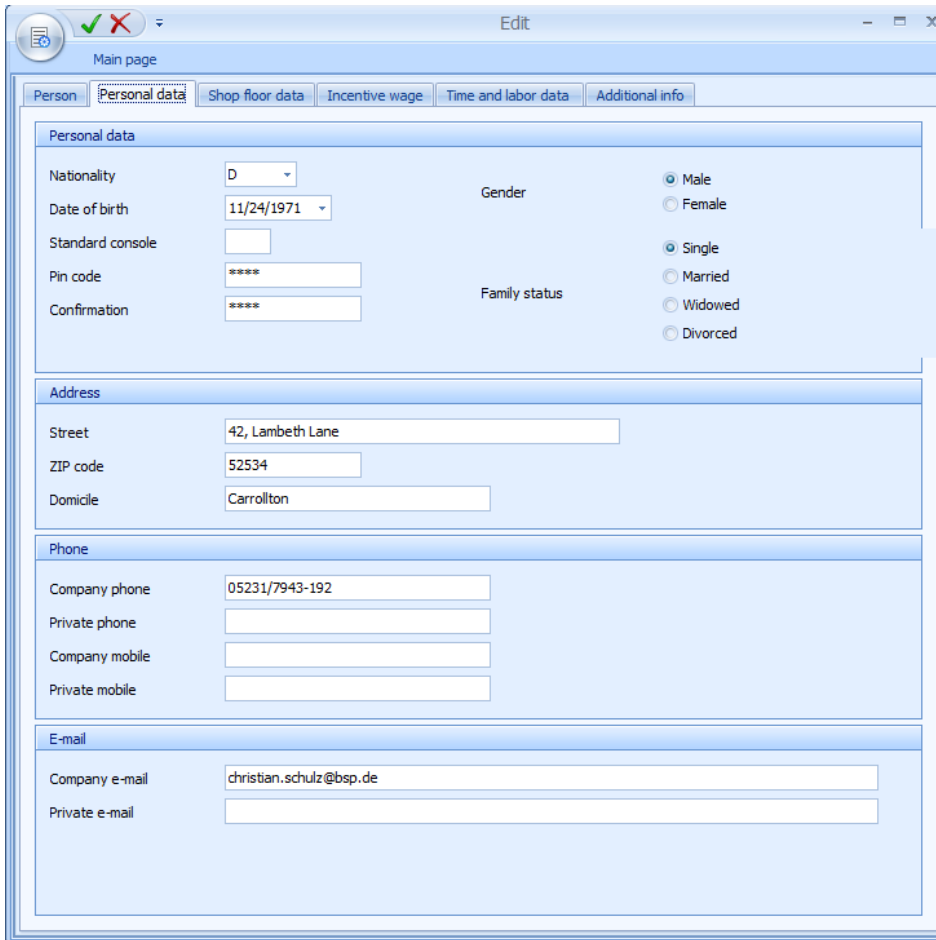

Allocation of Supervisor to HYDRA User

Menu	System administration → User administration → Users
Transaction code	user
Function authorization	user

When the supervisor logs on to the HYDRA MOC, the system displays the requests for absences in the *Current Escalations* window. For this to work, it is necessary to link the personnel number of the supervisor and the [User](#) number he/she uses to log on.

Company, Person

Assignment of the user to a person in the HR master data.

Control of Absence Times that are displayed

Menu	Master data → Labor time → Control of absence times
Transaction code	abse
Function authorization	abse

The absence times you can select in the *Absence workflow* are specified in the [Control of absences](#) window.

Absence may be requested

The button specifies whether you can select the absence time using the Web interface.

Request needs to be approved

This parameter is used to specify whether the absence time requested via the absence workflow must be approved by the supervisor or whether it is automatically approved.

3 Replacements

Overview

If the supervisor is absent and an absence request is made via absence workflow, then you can forward this absence request to the person replacing the supervisor (replacement).

The settings for the replacement configuration are made in different applications in HYDRA MOC:

Configuration – HR master data

Menu	Master data → Staff → HR master data
Transaction code	pers
Function authorization	pers.*

You specify the replacement of the supervisor in the application [HR master data](#).

Field descriptions

It is important to specify *Replacement 1* and *Replacement 2* in the HR master data of the relevant supervisor.

Replacement 1

Specifies the first person replacing the supervisor. You can use this field to specify the person that replaces the supervisor in case of absence. The absence workflow uses this field when a user replacing the supervisor is required.

Replacement 2

Specifies the second person replacing the supervisor. You can use this field to specify the person that replaces the supervisor and the first replacement in case of absence. The absence workflow uses this field when a user replacing the supervisor is required.

Configuration – INI configuration

Menu	System administration → System settings → INI configuration
Transaction code	inifg
Function authorization	inifg.*


INI configuration:


- Name: FORWARDING
- Section: WORKFLOW
- Key: DEPUTY
- Value: 7

By default, the value must be set to 7.

The INI configuration specifies that the supervisor must be available at least 7 days before start of the holiday leave of the person. Only then can the supervisor authorize or reject the request. If the supervisor cannot guarantee this because of an absence (e.g. holiday leave or sick leave), the absence request is sent to the first replacement. HYDRA uses the absence planning or the personnel scheduling to identify if a supervisor is available or not. If also the first person replacing the supervisor is not available these 7 days, then the absence request is sent to the second replacement.

Graphic presentation:

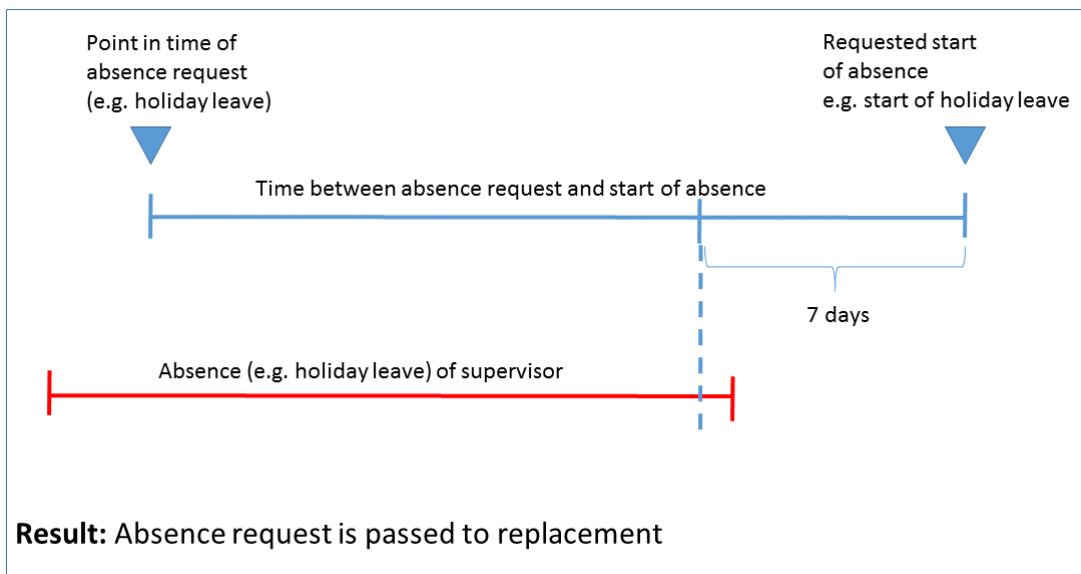

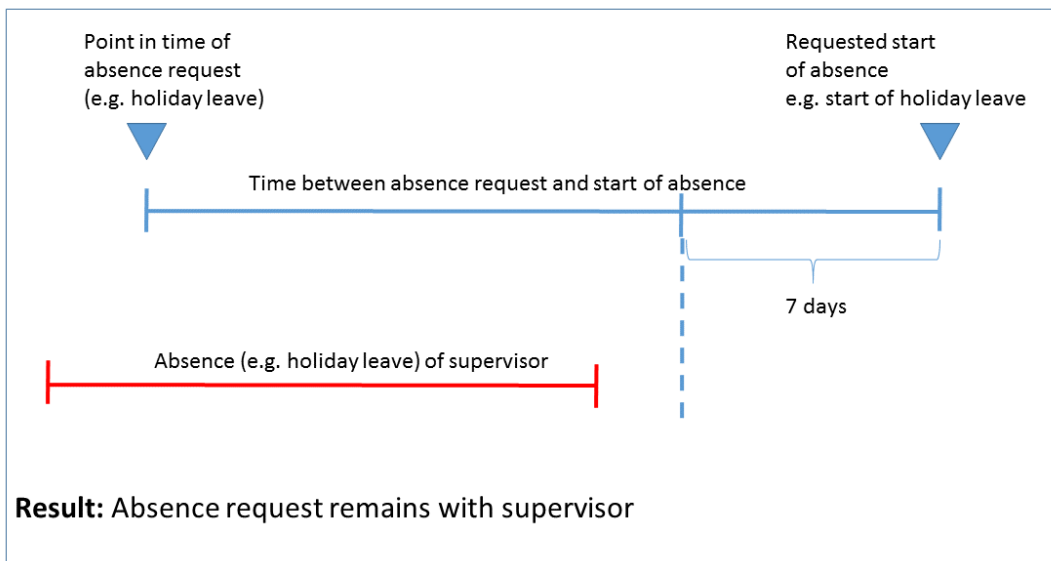

If the supervisor, the replacement and the second replacement are not available in the specified period (7 days), then the absence request is only sent to the supervisor.

4 Request Absences

Overview

After logging into the HYDRA@WEB Web portal and after the login details have been authorized, the employee may request absence via intranet. In order to be able to request an absence, the Absence planning function must be called up in the Web Portal.



Absence planning

Absence planning begins with an overview of the yearly calendar for the current year and it shows the currently planned absences for the employee.

The interface shows the 'Absence planning' section for the year 2013. It includes a sidebar with user information (User: Holzinger, Beate; System: Demo-Server) and a main calendar grid. The calendar grid displays days of the month with various absence codes (e.g., Fei, GLZ, Kra, Sch, F12) and a status bar at the bottom showing 'Current: 43.0' and 'End of the year: 27.5'.

Requesting absence always begins by clicking on a specific calendar day. A form will open, in which the values for the personnel number, the name and date have already been defined.

The 'Request absence' dialog box contains the following fields:

- Personnel no.**: Last name, First name Holzinger, Beate
- Date**: 09/12/2013 to 09/12/2013
- Absence reason**: Urlaub
- Commentary**: (empty text area)
- Buttons**: OK, Cancel

The values that identify the person (personnel number and name) cannot be modified. The user may modify the other fields, whereas the entry from the comments field in the calendar is shown as a tooltip. In addition, the comments on the days on which absence is planned are also shown in the attendance overview. Save the entry by clicking on the OK icon. The calendar is then restructured, whereas the requested absence is entered in italics. Absence times that have already been approved or for which a request does not need to be submitted are shown in normal format.



From the configuration [Control of absence times](#) you can define which absence times to select. The settings are defined there from the icon "Absence time may be requested" and "Request needs to be approved".

You can cancel an absence request using the function "Cancel request" as long as it has not yet been authorized or refused. Requested absence times are displayed in italics. To cancel a request, you must again click on the absence time in the calendar.

Fehlzeit bearbeiten

Personalnummer 96665
Name, Vorname Holzinger, Beate
Datum 30.12.2011 bis 30.12.2011
Fehlgrund Urlaub
Kommentar Url

Antrag zurückziehen Abbrechen

Absence planning for days in the past opens the form in display mode. You cannot modify these absence times.

Absence planning

Personnel no.
Last name, First name Holzinger, Beate
Date 14/01/2013 to 25/01/2013
Absence reason Urlaub
Commentary

Cancel

5 Absence Planning in WEB

Overview


After logging in at the *MES Info Portal*, a user will be provided with an overview of the requested and scheduled absence times of his/her employees via the *Absence planning* menu item.

<

In addition to the Company, Personnel number, Name and Activity fields for each person, this person's current leave account status and the calculated leave account status by the end of the year will be displayed.

In the calendar, requested periods of absence are indicated in italics. Absence times which have already been approved or for which a request does not need to be submitted are shown in standard type.

Planning absence times starts with a mouse click on the start date of the period of absence. A form will open in which the fields for personnel number, name and date are set automatically.

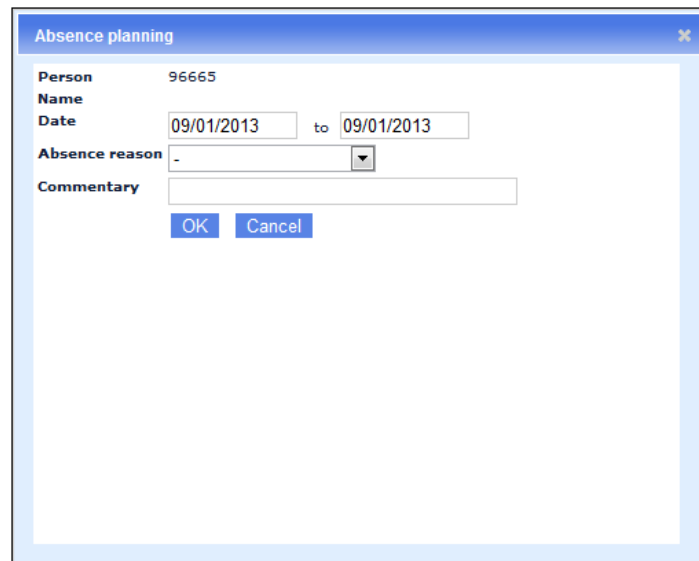


The dialog box titled "Absence planning" contains the following fields:

- Person:** 96665
- Name:** (empty)
- Date:** 09/01/2013 to 09/01/2013
- Absence reason:** - (dropdown menu)
- Commentary:** (text input field)
- Buttons:** OK, Cancel

The entry in the Comment field will be shown as a tooltip in the calendar. In addition, the comments on the days on which absence is planned are also shown in the attendance overview.

By clicking on a requested absence time (in italics), a dialog for approving or rejecting the request is opened:

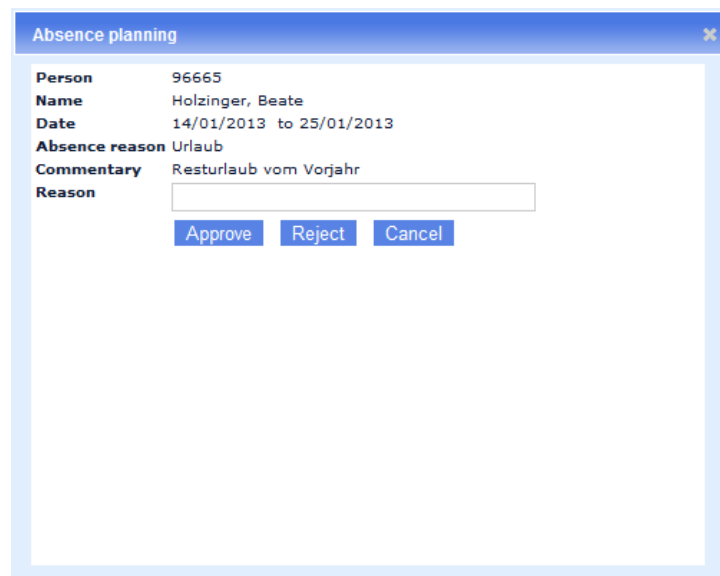

The dialog box titled "Absence planning" contains the following fields:

- Person:** 96665
- Name:** Holzinger, Beate
- Date:** 14/01/2013 to 25/01/2013
- Absence reason:** Urlaub
- Commentary:** Resturlaub vom Vorjahr
- Reason:** (text input field)
- Buttons:** Approve, Reject, Cancel

The editor can also enter reasons for his/her decision in the Reason box.