

Manual

WRM Archiving WRM-ARC 8.2

Version 1.1.23372

Last changed on: 23.09.2020

Copyright

©Copyright 2020 All rights reserved.

SAP® and R/3® are registered trademarks of SAP AG.

WINDOWS® is a registered trademark of Microsoft Corporation.

MPDV® and HYDRA® are registered trademarks of MPDV Mikrolab GmbH.

ORACLE® is a registered trademark of ORACLE Corporation, California, USA.

Copying and distribution of this documentation or any part thereof, for any purpose or in any form, is prohibited without prior written permission from MPDV Mikrolab GmbH.

The information contained in this documentation is subject to change without prior notice.

Contents

1	Resources Management - Archiving	4
2	WRM-Specific Configurations	5
3	Data Management.....	7
4	Functions/configurations specific to product groups	10
4.1	CAQ	10
4.2	BDE	10
4.3	MDE	10
4.4	WRM.....	10
4.5	PDV	11
4.5.1	Overview	11
4.5.2	Configuration	11
4.6	MPL / TRT	13
4.7	HLS.....	13
4.8	PZE / PZW	13
4.9	PEP.....	13
4.10	LLE	14
4.11	ZKS.....	14
4.12	ESK.....	14
4.13	ETD.....	14
5	Reload Manager.....	15

1 Resources Management - Archiving

Overview

Purpose

Resource information archiving refers to the resource data that is generated as a result of managing objects and orders. As with the other MES areas, archiving is divided into three parts:

- Active data set: Current data accumulate here and can also be edited here using the editing functions.
- Medium-term archive data set: The data are in a different area within the database and can no longer be modified, but are completely available in the reports.
- Backed-up long-term data area. The data are no longer available in the reports; they have been backed up onto data media outside the database. The data can be restored into the database for evaluation purposes.

Features

Configuration functions and administrative operations used to control how resource data is archived.

- Archiving function to automatically transfer collected resource data (postings, events) into archive tables.
- Direct access to the archived resource data from the functions resource history and use of resources at the HYDRA console
- Ability to export data from the archive tables onto external file systems in HYDRA standard format (using the customer's server-based unload/ load function)
- Ability to import backed up data into the archive tables so as to be able to evaluate them at the HYDRA console using the resource history and use of resources functions (using the customer's server-based unload/load function)
- Administration of archive data throughout preset periods of time in the HYDRA database.

2 WRM-Specific Configurations

Overview

You can archive the following data according to project-specific, internal or even legal specifications to access this data at a later point in time.

- Resource log records
- Events
- Additional information

WRM archiving includes the following data:

- Log records (tables res_belege, a_res_belege)
- Events (tables event_res, a_event_res)
- Additional information (tables hyd_logging, a_hyd_logging_data)
- Document links (tables hyd_document, a_hyd_document)

Configuration

Use the HYDRA Data Management to configure how long data is kept in the different data areas.

Data is only transferred to the archive tables when the "retention period" has expired. For implemented archiving processes, the default values are specified. You can configure different values for each system.

If the WRM archiving license is not available, the data is deleted once the configured retention period has expired.

Product	Object	Object name	Transfer	Default retention period
WRM	WRMPRO	Log records	Online data → medium-term archive	35 days
WRM	A_WRMPRO	Long-term archiving of log records	Medium-term archive → Long-term archive	3 years
WRM	EREIGWRM	Events	Online data → medium-term archive	35 days
WRM	A_EREIGWRM	Long-term archiving of events	Medium-term archive → Long-term archive	3 years
WRM	LOG	HYDRA logging data	Online data → medium-term archive	35 days
WRM	A_LOG	Long-term archiving HYDRA of logging data	Medium-term archive → Long-term archive	3 years

Configuring the archiving of the document management

The documents of the HYDRA document management are archived when the relevant object is archived. The files themselves remain at their original storage location and are not archived.

As part of the HYDRA document management of the WRM, you can assign documents to the following objects.

- Resources
- Maintenances of the activity calendar
- When resetting the maintenances performed

To archive the document entries, make the following entries in the HYDRA data management.

Product	Object	Transfer	Default retention period
WRM	DOCLINK	Moving the document entry from the online data to the medium-term data stock.	0 days
WRM	A_DOCLINK	Moving the document entry from the medium-term data to the long-term data.	0 days

Set the interval to "0 days" so that the archiving is directly performed after the archiving of the respective object.

3 Data Management

Overview

HYDRA menu	System administration → Archiving → Data management
FEDRA menu	System administration → Archiving → Data management
Transaction code	arccfg
Function authorization	arccfg.*

Purpose

You use this application to view or change the centrally managed archiving settings of recorded data.

Integration

Use this application to configure the settings for archiving / data management for all components/functions.

Field descriptions

Product

Enter the system module for which you want to define a rule.

Object

Use the *Object* to define the data you want to retain.

Retention period

Use the fields for the *Retention period* to define how long data should be available until data is archived.

Unit

Specify the retention period in days, months or years.

Last retention date

This field is computed and specifies the last day when data is still available in this object.

Action

You can choose from three options to specify the processing for an object:

D = delete	Object is deleted
M = move (archive)	Object is transferred to the next area
X = export	Object is unloaded (XUNLOAD format) and then deleted

Target object

Currently, the target object automatically results from the detail configuration.

Condition

The characters in this field are added as an additional condition to the database command that controls the action. This condition is linked to the other conditions of the original command using AND and is set in parentheses.

Last run (date/time)

Indicates the point in time when this rule was applied last.

License

Indicates which license is required for archiving. You can enter several licenses (separated by a space). If none of these licenses is licensed in the system, the data is either deleted (action D) or unloaded into files (action M or X), depending on the relevant action.

Path

Optional path to generate the file export (unload). The archiver currently only supports local HYDRA server drives. If you do not enter a path, file exports are filed as follows:

<HYDRADIR>/<SYSTEM>/custom/archive/<YYYY-MM-DD>/<PRODUCT>/

HYDRADIR HYDRA directory

SYSTEM ... system number

YYYY-MM-DD ... archiving day (YYYY ... year, MM ... month, DD ... day)

PRODUCT ... product from archiving configuration

Administration table

Name of the administration table where archiving logs are stored.

Administration duration (retention period of administration table)

Use the fields for the *retention period* to specify how long the logs should be available in the administration table before being deleted.

Unit

Specify the retention period in days, months or years.

Archiving step

Specifies if this archiving process uses archiving function I or II. Archiving function I: The function moves data from the online data set to archive tables or deletes the data: setting M (medium-term archive). Archiving function II: The function moves data from the archive table to the file export or deletes the data: setting L (long-term archive).

Configuration

Indicates whether or not the configuration is active. Possible values: Y/N

Archiving type

Identifier for time or object-related archiving. Supported modes: O = Object-related archiving (i.e. data is archived for each object individually). Z = Time-related archiving (i.e. data is archived without any object reference).

Note: Time and object-related archiving differ from each other significantly in the archiving performance (runtime). Object-related archiving of mass data is not recommended.

Priority

Integral value greater than 0. Indicates the processing sequence if several objects are defined for a product group. Processing starts with the lowest value.

Master table

Table including the data to be archived. The extensions entered in the *Condition* field refer to this table.

Date column

Date column in the master table. The system uses this date column to evaluate the retention period for the data to be archived.

Key 1

Unique key column in the master table; this key identifies the data to be archived. You can define up to 5 key columns for object-related archiving. Time-related archiving only supports one primary key in *Key 1*.

Keys 2 – 5

Additional optional key columns for object-related archiving.

Comment

Use the comment line to describe the archiving configuration.



If you copy the archiving configuration, the system currently only copies the data management configuration, but no defined data records from the object details. Currently, you must use the respective dialog to copy the data records of the object details to the new configuration.

4 Functions/configurations specific to product groups

4.1 CAQ

For information on the data management configurations of CAQ 8.1, refer to the document [MBL_Archiving_CAQ.pdf](#).

4.2 BDE

For information on the data management configurations of BDE 8.1/BDE 8.2, refer to the document [MBL_Archiving_BDE.pdf](#).

4.3 MDE

For information on the data management configurations of MDE 8.1/MDE 8.2, refer to the document [MBL_Archiving_MDE.pdf](#).

4.4 WRM

For information on the data management configurations of WRM 8.1/WRM 8.2, refer to the document [MBL_Archiving_WRM.pdf](#).


4.5 PDV

4.5.1 Overview

The standard archiving function of HYDRA-PDV 7.2 can archive mass data tables. The system writes table data into files that are stored using a defined path.

Mass data tables (also called TNT tables) include a time stamp in their name ID that is used during archiving.

The table "tnt_table_repo" provides information on the archiving status of the single TNT tables, e.g. information on the location and the name of the data file, or on an eventual re-import of the table that might require a new export.

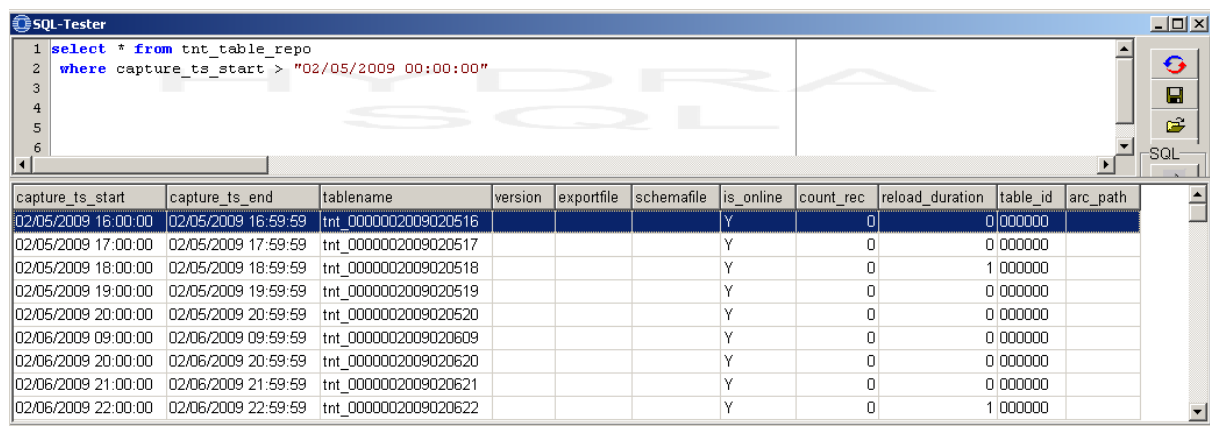

The screenshot shows a SQL-Tester window with a query executed against a database. The query is: `select * from tnt_table_repo where capture_ts_start > "02/05/2009 00:00:00"`. The results are displayed in a table with the following columns: capture_ts_start, capture_ts_end, tablename, version, exportfile, schemafilename, is_online, count_rec, reload_duration, table_id, and arc_path. The data shows several rows of TNT tables with their respective timestamps and IDs.

capture_ts_start	capture_ts_end	tablename	version	exportfile	schemafilename	is_online	count_rec	reload_duration	table_id	arc_path
02/05/2009 16:00:00	02/05/2009 16:59:59	tnt_0000002009020516				Y	0	0	000000	
02/05/2009 17:00:00	02/05/2009 17:59:59	tnt_0000002009020517				Y	0	0	000000	
02/05/2009 18:00:00	02/05/2009 18:59:59	tnt_0000002009020518				Y	0	0	1000000	
02/05/2009 19:00:00	02/05/2009 19:59:59	tnt_0000002009020519				Y	0	0	000000	
02/05/2009 20:00:00	02/05/2009 20:59:59	tnt_0000002009020520				Y	0	0	000000	
02/06/2009 09:00:00	02/06/2009 09:59:59	tnt_0000002009020609				Y	0	0	000000	
02/06/2009 20:00:00	02/06/2009 20:59:59	tnt_0000002009020620				Y	0	0	000000	
02/06/2009 21:00:00	02/06/2009 21:59:59	tnt_0000002009020621				Y	0	0	000000	
02/06/2009 22:00:00	02/06/2009 22:59:59	tnt_0000002009020622				Y	0	0	1000000	

Patch:

The standard HYDRA-PDV 7.2 installation provides the option to archive mass data, thus TNT tables.

- DBPATCH PDV_72 (includes the "pdv_setup" table)
- DBPATCH TNT_72 (includes the "tnt_table_repo" table)

License:

Lizenz	Produktbezeichnung	Kategorie	Produkt	Anzahl	Gültig bis	Release
	PDV	HYDRA	PDV-ARC	1		7.2

4.5.2 Configuration

Mass data is archived via two components: export and import.

The export is performed at cyclic intervals and is started by the system scheduler. The export unloads “due” tables from the database into data files on hard disk.

The import (or reload) function is a kind of library. If required, you use this function to reload data from the data files back to the database tables.

In general, the export function transfers the files one-to-one from the database into the data files. You can also configure a one-to-many relationship, i.e. you can distribute a table among several files. Vice versa, a file must belong to exactly one table (one table can have several files, but a file always refers to exactly one table).

Program: hp_mexp.exe / out

Installation: The program is entered in the system Scheduler and started cyclically.

Console menu: File – System administration – Scheduler

The corresponding time, when the program is to be started can be defined in the “fix” tab.

Important: You should not start the export program at little intervals in the Scheduler, because it is an archiving program. Depending on the data volume, a daily (each night) or weekly rhythm is enough.

You must also define a parameter that specifies when the data is old enough to be archived. Here, the parameter refers to the number of tables that may be online. If this number is exceeded, the oldest TNT tables are archived via export. The parameter is included in the “pdv_setup” table. You can change the parameter in the basic settings of the console, in tab “PDV”.

As part of the implementation process, it has to be checked if the archiving path with ID “PDVARC” exists in the “arc_path” column of the “pdv_setup” table (and, if required, if the transport path has been defined with the ID “PDVTRANS” in the “trans_path” column).

You can then use the table “hy_path” to find the respective directories.

You may not define a host if a relative URL path is defined for archiving, PDVARC, (depending on the file hp_mexp.scr).

As part of a customization, you can also archive further data (e.g. events). To this end, you must store the respective entries in the table "hyd_datamanagement". The process is identical to the one of the general archiving.

4.6 MPL / TRT

For information on the data management configurations of MPL or TRT in versions 8.1 or 8.2, refer to the document [MBL_Archiving_MPL.pdf](#).

4.7 HLS

For information on the data management configurations of HLS 8.1, refer to the document [MBL_Archiving_HLS.pdf](#).

4.8 PZE / PZW

For information on the data management configurations of PZE or PZW in versions 8.1 or 8.2, refer to the document [MBL_Archiving_PZW.pdf](#).

4.9 PEP

For information on the data management configurations of the Personnel Scheduling PEP in versions 8.1 or 8.2, refer to the document [MBL_Archiving_PEP.pdf](#).

4.10 LLE

For information on the data management configurations of the Incentive Wage LLE 8.1, refer to the document [MBL_Archiving_LLE.pdf](#).

4.11 ZKS

For information on the data management configurations of the Access Control ZKS in versions 8.1 or 8.2, refer to the document [MBL_Archiving_ZKS.pdf](#).

4.12 ESK

For information on the data management configurations of the Escalation Management in version 3.0, refer to the document [MBL_ESK_Archiving.pdf](#).

4.13 ETD

For information on the data management configurations of the Label Design in version 3.0, refer to the document [MBL_Archiving_ETD.pdf](#).

5 Reload Manager

Summary

HYDRA menu	System administration → Archiving → Reload manager
FEDRA menu	System administration → Archiving → Reload manager
Transaction code	arcrl
Function authorization	arcrl arcrl.export arcrl.import

Purpose

The customer is responsible for backing up data in a data archive and for restoring data. When data is backed up it is transferred from the long-term data area to the archive data area and, as a result, it is stored in a separate file system. The customer can start the backup process using the Reload Manager.

When data, which is filed in the archive data area, is restored, it is transferred back (copied) to the long-term data area. The customer has to do this and bears the responsibility.

To be able to evaluate restored data using standard evaluations/reports, the data has to be transferred back (copied) to the reload data area.

For this reason, the Reload Manager enables the following functions:

1. Moving of exported data into the customer archive (the customer archive path has to be defined within the HYDRA path settings).
2. Loading of exported data into the reload area for evaluations

Integration

The Reload Manager is a central function that is used by many components or functions.

Selection Criteria

The application provides the following selection criteria:

Module

Reference to the product group which archived data belongs to.

Object type

Object type of the archived data.



The selection options “module” and “object type” are mandatory fields.

Toolbar

Export

The “EXPORT” button allows for the entries selected in the Reload Manager to be exported to the customer directory (all data records can be selected using the context menu of the right mouse button). Once the function has been started, the input dialog that opens requires the customer archive path to be entered.

Import

The “IMPORT” button allows for the selected entries to be loaded into the reload area, in order for the data to be again available for HYDRA evaluations/reports. Once the function has been started, the data loading mode and an optional path are requested. By indicating the path, it is possible to specify another storage location for the files, provided that the archived files have not been moved to the customer-specific archive using the Reload Manager.

There are three different ways to deal with reload data after they have been reloaded to prevent the reload data set from increasing excessively (→ no slow evaluations/reports):

The following modes are distinguished:

- **Cyclic**
Data is loaded to the reload area in the “cyclic” mode. Loaded data is automatically removed from the corresponding reload tables, once the retention period specified within archive settings has expired.
Please compare the configuration entry HYD / RELOADMANAGER of the data management function. When demo settings are used, data is removed from the reload area after 14 days.

When data is imported, the HYD_REL_MANAGEMENT.DELETE_DATE field is calculated subject to the configuration and entered in the reload management table.

- **User-specific**
Data is loaded to the reload area in the “user-specific” mode. The loaded data is automatically removed from the corresponding reload area, once the time specified for the user within the user-specific settings has expired. Exception: In case several users loaded identical data into the reload area, the corresponding retention period is automatically set to the maximum date.
When data is imported, the HYD_REL_MANAGEMENT.DELETE_DATE field is computed subject to the configuration and entered in the reload management table.

- Manual

Data is loaded in the “manual” mode to the reload area. The customer is responsible for deleting data from corresponding reload tables. However, identical data cannot be loaded several times in the “manual” mode (data can be loaded in the “user-specific” mode though).

In order for data to be transferred to the reload data area, the HYDRA server must be able to access these files. Otherwise, loading is cancelled with an error message.