

HYDRA Documentation

Change Hostname of a HYDRA MW4.0pe Server

Version 1.0.23049

Last changed on: 02.09.2020

Copyright

©Copyright 2020 All rights reserved.

SAP® and R/3® are registered trademarks of SAP AG.

WINDOWS® is a registered trademark of Microsoft Corporation.

MPDV® and HYDRA® are registered trademarks of MPDV Mikrolab GmbH.

ORACLE® is a registered trademark of Oracle Corporation, California, USA.

Copying and distribution of this documentation or any part thereof, for any purpose or in any form, is prohibited without prior written permission from MPDV Mikrolab GmbH.

The information contained in this documentation is subject to change without prior notice.

Contents

1	Change Hostname and/or IP-Address	4
1.1	Shutdown HYDRA.....	5
1.2	HYDRA Database	7
1.2.1	ORACLE	7
1.2.2	SQL Server	10
1.3	HYDRA Server	14
1.3.1	Linux	15
1.3.2	Windows.....	17
1.3.3	Common.....	19
1.4	HYDRA Clients.....	23
1.4.1	Terminal	23
1.4.2	MES Operation Center (MOC).....	24
1.4.3	B-COMM	25
1.4.4	ILHYDRA.....	27
1.4.5	PDV.....	28
1.4.6	CAQ MDI Interface	29
1.4.7	WFM Workflow Management	30
1.4.8	SmartMES (SMA).....	35

1 Change Hostname and/or IP-Address

This manual describes the necessary configuration procedures for HYDRA MW4.0pe if the hostname and/or the IP-address of an already installed HYDRA server needs to be changed afterwards.

Attention:

To perform the following procedures detailed knowledge of HYDRA, the used database system and the server operating system is required.

These procedures are performed on your own responsibility.

MPDV Mikrolab GmbH is not liable for any loss of data or for any destruction of data.

In case of doubt you might want to place an order with MPDV Mikrolab GmbH to perform these tasks for you.

If the following procedures are used to duplicate a HYDRA system, e.g. to create a test system by copying a productive system, you must be specially aware of the HYDRA database connection configurations and any data interface configurations to other systems like SAP, PPS, ERP, MDI server, etc.

If a duplicated system will be activated parallel to the source system without any further measures this might lead to the loss of data or to the destruction of data.

The duplicated system should be operated in an isolated environment until all necessary configuration changes are successfully completed and any mutual interactions with the source system can be excluded.

For the time being the communication between the HYDRA components is solely based on the network protocol **TCP/IP Version 4 (IPv4)**.

If there are servers or clients involved which are additionally supporting TCP/IP Version 6 (IPv6) then it might be necessary to make certain arrangements to ensure the use of IPv4, e.g. by using IPv4 IP-addresses instead of hostnames.

1.1 Shutdown HYDRA

- Logon to the HYDRA server as user **mipadm**


- Shutdown HYDRA:

Linux:

```
hy_down.scr shutdown
```

Windows:

Shut down the “Base System” in the MIP Manager:

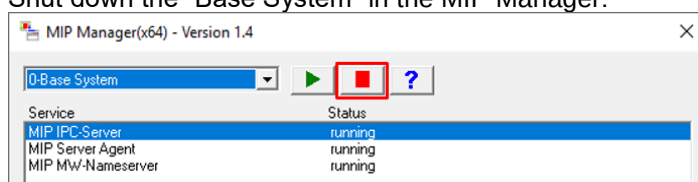

- Make sure that HYDRA won't start automatically after restarting the server:

Linux:


rename the HYDRA start script \$HYDRADIR/hy_start.scr to hy_start.scrxxx, e.g.:

```
mv /u1/mip1/hy_start.scr /u1/mip1/hy_start.scrxxx
```

Windows:

Change the startup type of all MIP(x) services which are currently set to “Automatic” to “**Manual**”.

e.g.: “MIP Server Agent”, “MIP IPC-Server”, “MIP1 Server Agent”, “MIP1 Maintenance Manager”

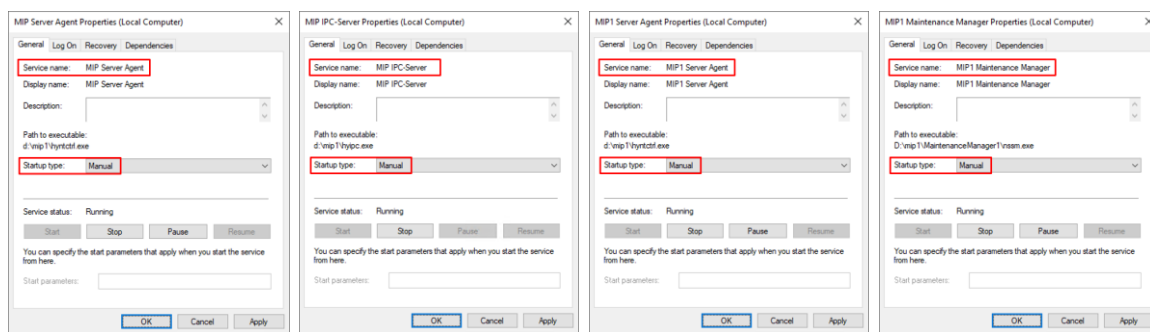

In a HYDRA Multi system environment you have to make sure that the automatic startup for all such services in all HYDRA systems is deactivated.

- Check that the MIP Web Service Provider (WSP) is not running and shut it down if necessary.

Linux:


```
ps -ef | grep -i WSP
```

Windows:

Check and if necessary shutdown the Windows service:

„**MIP~~x~~ Web Service Provider (WSP)**“ (x = system number), e.g.:

„**MIP1 Web Service Provider (WSP)**“

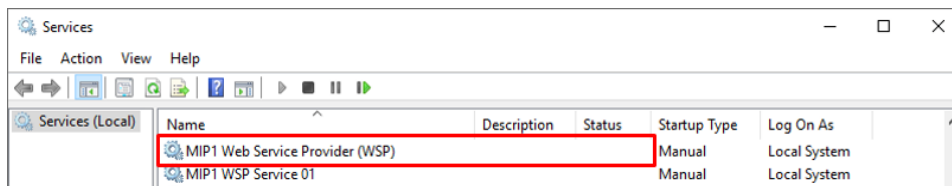

In a HYDRA Multi system environment you have to repeat those steps for **every** WSP server in all HYDRA systems.

- Check that the HYDRA EMQTT broker is not running and shut it down if necessary.


Linux:

```
ps -ef | grep -i EMQTT
```

Windows:

Check and if necessary shutdown the Windows service:

„**MIP~~x~~ MQTT Broker**“ (x = system number), e.g.: „**MIP1 MQTT Broker**“

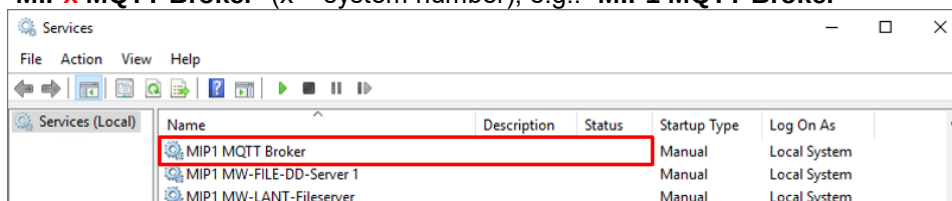

In a HYDRA Multi system environment you have to repeat those steps for **every** EMQTT server in all HYDRA systems.

1.2 HYDRA Database

1.2.1 ORACLE

1.2.1.1 Linux

- Make sure HYDRA is shut down completely, see chapter "[1.1 Shutdown HYDRA](#)".
- Logon to the HYDRA server as user **oracle**
- Shutdown the database and then make sure it starts again without error message.
In HYDRA multi system installations make sure to use the proper Oracle instance, e.g.: export ORACLE_SID=MIPx (x = instance number)

```
export ORACLE_SID=MIP1
cd $ORACLE_HOME/bin (e.g.: cd /u1/oracle/ora19/bin)
sqlplus /nolog
SQL> connect sys as sysdba
SQL> shutdown immediate
SQL> startup
SQL> exit
```

Should the database do not start again without error message, make sure to fix the problem first.

Do not proceed until the database starts up without error!

- Shutdown the ORACLE database:

```
export ORACLE_SID=MIP1
cd $ORACLE_HOME/bin (e.g.: cd /u1/oracle/ora19/bin)
sqlplus /nolog
SQL> connect sys as sysdba
SQL> shutdown immediate
SQL> exit
```
- Shutdown the Oracle Listener:

```
cd $ORACLE_HOME/bin (e.g.: cd /u1/oracle/ora19/bin)
lsnrctl stop LISTENER_MIPx (x = instance number), e.g.:
lsnrctl stop LISTENER_MIP1
```

- In a HYDRA Multi system environment you have to repeat those steps for **every** database instance and for every listener.
- Make sure that all database processes are switched off properly.
- Check the following ORACLE files and change them where necessary:
`$ORACLE_HOME/network/admin/sqlnet.ora`
`$ORACLE_HOME/network/admin/listener.ora`
`$ORACLE_HOME/network/admin/tnsnames.ora`
- **Change hostname and/or IP-address of the server.**
For detailed information about how to do that see the manual of your operating system.
- **Restart the server.**
- Logon to the HYDRA server as user **oracle**
- Make sure all database instances and listeners are running properly.

1.2.1.2 Windows

- Make sure HYDRA is shut down, see chapter "[1.1 Shutdown HYDRA](#)".
- Logon to the HYDRA server as user **mipadm**
- Shutdown the database and then make sure it starts again without error message.
In HYDRA multi system installations make sure to use the proper Oracle instance.
Select the appropriate shortcut "**sqlplus MIPx**" (x = instance number) from the folder "MIP Administration" on the Windows Desktop, e.g.:

```
"sqlplus MIP1"
connect sys as sysdba
SQL> shutdown immediate
SQL> startup
SQL> exit
```


Should the database do not start again without error message, make sure to fix the problem first.

Do not proceed until the database starts up without error!


- Shutdown the ORACLE database:
execute e.g. "sqlplus MIP1"
connect sys as sysdba
SQL> shutdown immediate
SQL> exit
- Shutdown the Oracle Listener:
Shutdown the Windows service "OracleOraDB19Home1TNSListenerLISTENER_MIP1"
- In a HYDRA Multi system environment you have to repeat those measures for **every** database instance and for every listener.
- Make sure that all database services are switched off properly.
- Check the following ORACLE files and change them where necessary:
%ORACLE_HOME%\network\admin\sqlnet.ora
%ORACLE_HOME%\network\admin\listener.ora
%ORACLE_HOME%\network\admin\tnsnames.ora
- **Change hostname and/or IP-address of the server.**
For detailed information about how to do that see the manual of your operating system.
- **Restart the server.**
- Logon to the HYDRA server as user **mipadm**
- Make sure all database instances and listeners are running properly.

1.2.2 SQL Server


- Make sure HYDRA is shut down completely, see chapter “[1.1 Shutdown HYDRA](#)”.
- Logon to the HYDRA server as user **mipadm**
- Shutdown all Windows services for the SQL Server database, e.g.:

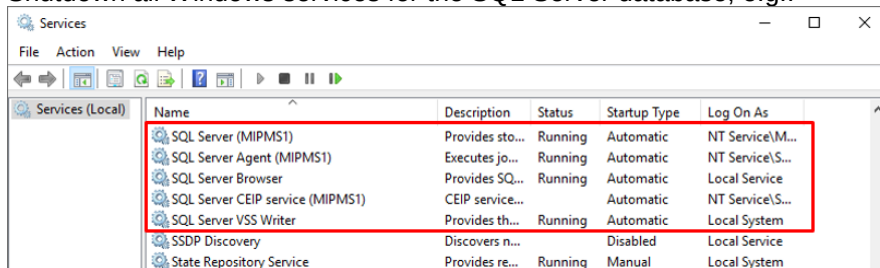

- Make sure that all database services are switched off properly.
- **Change the hostname and/or the IP-address of the server now.**
For detailed information about how to do that please see the manual of your operating system.
- **Restart the server.**
- Logon to the HYDRA server as user **mipadm**
- The SQL Server database should startup and work properly directly after the restart.
- In the SQL Server Management Studio connect to **newServerName\MIPMS1**

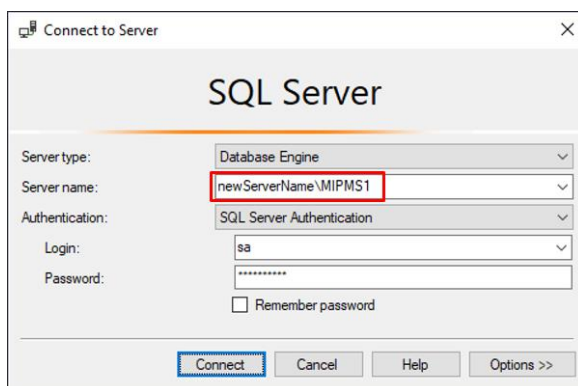

- After successfully connecting to the new server configuration (see above) open a **"New Query"** for the system database **"master"**:

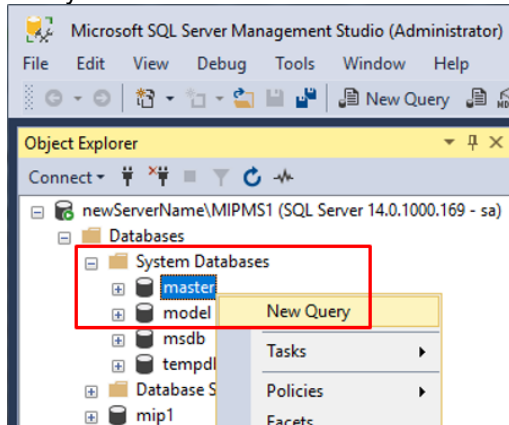

Check the current server name configuration by using one of the following commands which should still show the old server name:

```
sp_helpserver
```

	name	network_name	status	id	collation_name	connect_timeout	query_timeout
1	INB-MW40-1\MIPMS1	INB-MW40-1\MIPMS1	rpc, rpc out, use remote collation	0	NULL	0	0

Or

```
select @@SERVERNAME
```

Drop the old server name configuration:

```
sp_dropserver 'oldServerName\MIPMS1'
```

```
GO
```

If "sp_dropserver" shows errors like "... still remote logins ...", drop those remote logins as follows:

```
sp_dropremotelogin 'oldServerName\MIPMS1'
```

```
GO
```

Then try to drop the old server name configuration again.

Add the new server name configuration:

```
sp_addserver 'newServerName\MIPMS1', local
```

```
GO
```

Check the current server name configuration which should show the new server name now, e.g.:


```
sp_helpserver
```

	name	network_name	status	id	collation_name	connect_timeout	query_timeout
1	newServerName\MIPMS1	newServerName\MIPMS1	rpc, rpc out, use remote collation	0	NULL	0	0

Or


```
select @@SERVERNAME
```

- In the SQL Server Management Studio check if there are Maintenance Plans available and change their connection configurations:

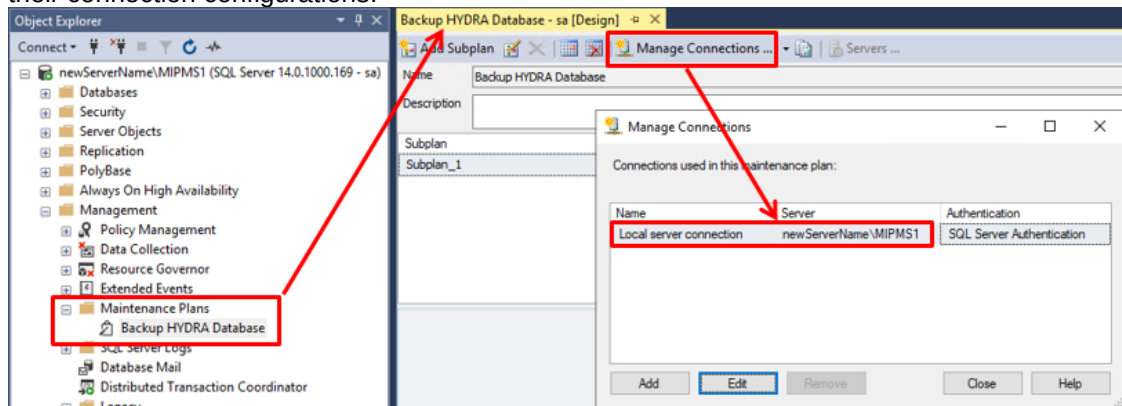


Depending on the configuration it might be better to recreate the Maintenance Plans from scratch.

- In the SQL Server Management Studio check the owner of the SQL Server Agent jobs and change it if necessary, e.g. if a Windows operating system user is used instead of the local SQL Server user „sa“, e.g. „oldServerName\mpadm“:

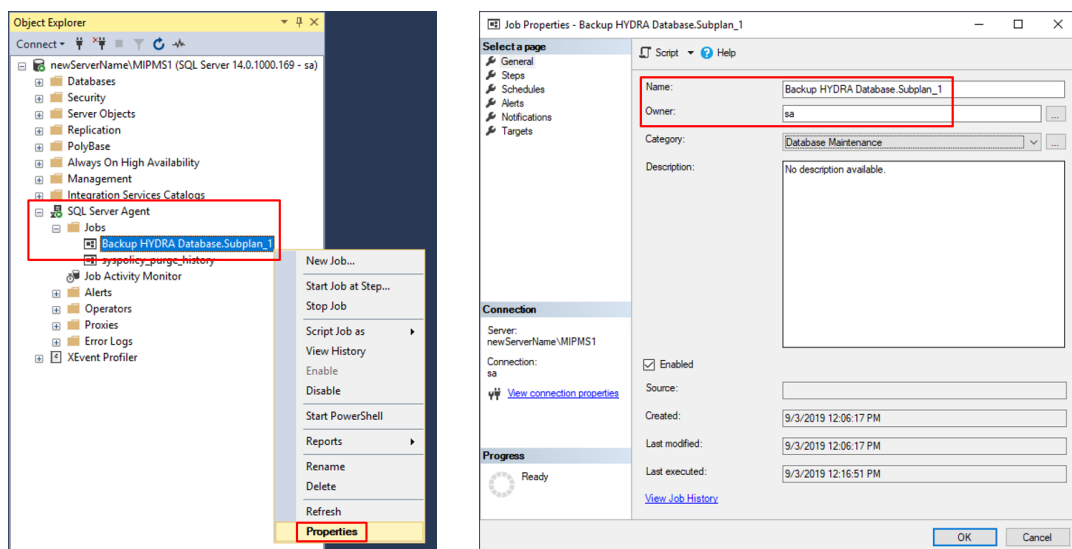


In such cases change the owner, e.g. to „newServerName\mpadm“:

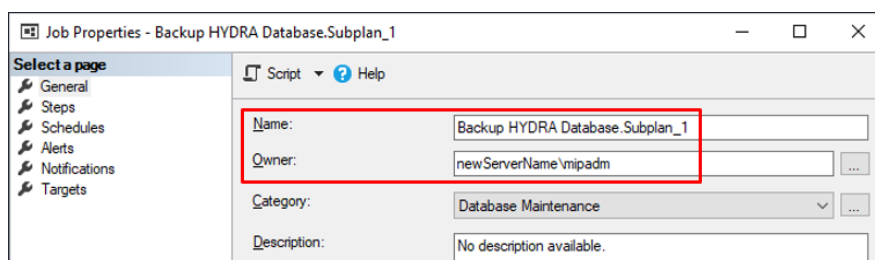

- Check the ODBC configuration

Check the System DSN name **MIPSQL1** in ODBC Data Sources (64-bit) and make sure to use the correct SQL Server configuration, e.g.:

newServerName\MIPMS1

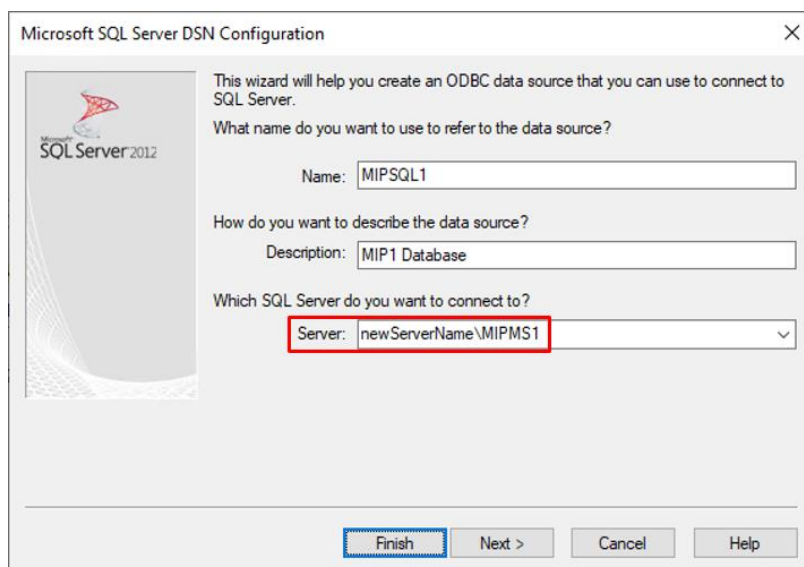

- On a server with HYDRA Multi system configuration repeat these actions for **every** database instance.
- **Restart the server.**

1.3 HYDRA Server


If this manual is used to create a copy of an already running HYDRA system, e.g. creating a test system by copying a productive system, you have to make sure that the following HYDRA services/processes are **reliably deactivated** on the duplicated system **before** you start HYDRA for the first time:

- **HYDRA Scheduler** (e.g. "MIP1 Scheduler")
- **HYDRA ECS** interface (e.g. "MIP1 ECS Inbound Dispatcher 0", "MIP1 ECS Server FP 1", "MIP1 ECS Server SAP 1", etc.)
- All **HYDRA PDV** services/processes (e.g. "MIP1 HYDRA-PDV-Communication Server" and "MIP1 HYDRA-PDV-Configuration Monitor").

To deactivate those processes on a **Linux** server you need to edit the file `/u1/mip1/x/hymap.dat` (e.g.: `/u1/mip1/1/hymap.dat`) and deactivate the proper entries by adding a semicolon ";" to the beginning of the line, e.g.:

```
;### MIP Scheduler (with table hyd_scheduler)  
;hysched.out -E./1/err/hysched.err -m6 -t:9999:0:0:0:MIP1 Scheduler
```

On a **Windows** server you need to change the startup type of all those services to "**Disabled**":, e.g.:

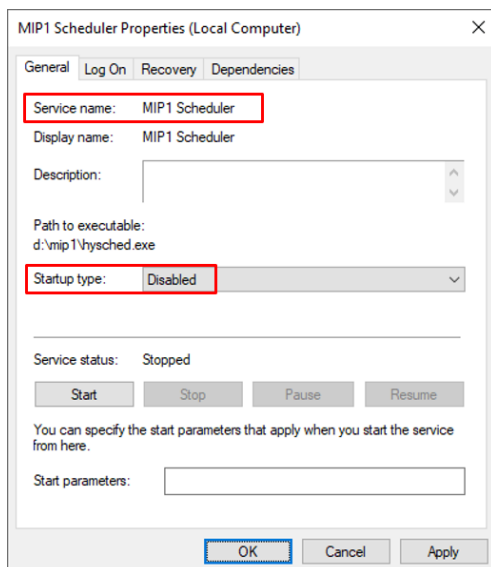

In a HYDRA Multi system environment you have to deactivate those services/processes for **every** HYDRA system.

Only after all the below mentioned configurations are checked and set correctly it is allowed to activate these services/processes again.

1.3.1 Linux

- Make sure HYDRA is shut down completely, see chapter "[1.1 Shutdown HYDRA](#)".
- Logon to the HYDRA server as user **mipadm**
- Shutdown the HYDRA Maintenance Manager 2.0 (if available)

```
sudo /etc/init.d/MIPx_Maintenance_Manager stop
```

(x = system number), e.g.:

```
sudo /etc/init.d/MIP1_Maintenance_Manager stop
```

In a HYDRA Multi system environment you have to repeat those steps for **every** Maintenance Manager belonging to a HYDRA system.

- Check the contents of the file **hysys.dat** (e.g. /u1/mip1/hysys.dat) and change them if necessary. On a server with a HYDRA Multi system configuration check and change the file hysys.dat in all application directories of all HYDRA systems (e.g.: /u1/mip2/hysys.dat, /u1/mip3/hysys.dat,.etc.).
- In the folder "MIP Administration" on the Windows Desktop of your Administration Console PC all shortcuts for "**Maintenance Manager MIPx**" must be changed, e.g.:

System 1: http://**newServerName**:18080


System 2: http://**newServerName**:18081

System 3: http://**newServerName**:18082, etc.

- In the folder "MIP Administration" on the Windows Desktop of your Administration Console PC the connection profile of the **Squirrel SQL Client** must be changed if necessary, e.g.:

Oracle: jdbc:oracle:thin:@newServerName:1521:MIP1

e.g.:

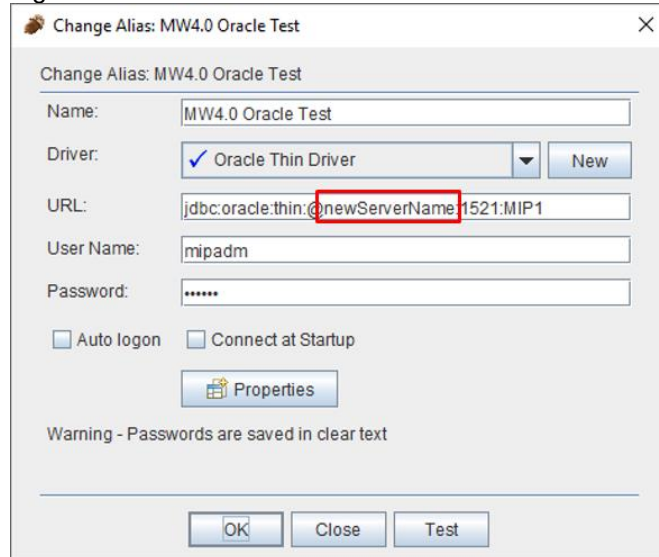

- On your Administration Console PC check all connect configurations of tools like PuTTY, WinSCP, etc. and change them if necessary.
- The configuration file **connect.properties** for the **System Text Configurator** must be checked and changed if necessary, e.g.: /u1/mip1/admttools/systemtextconfigurator/conf/connect.properties


Oracle:

jdbc:oracle:thin:@newServerName:1521:mip1

1.3.2 Windows

- Make sure HYDRA is shut down completely, see chapter [“1.1 Shutdown HYDRA”](#).
- Logon to the HYDRA server as user **mipadm**
- Check that the HYDRA Maintenance Manager is not running and shut it down if necessary.
“MIPx Maintenance Manager” (x = system number), e.g.:

“MIP1 Maintenance Manager”

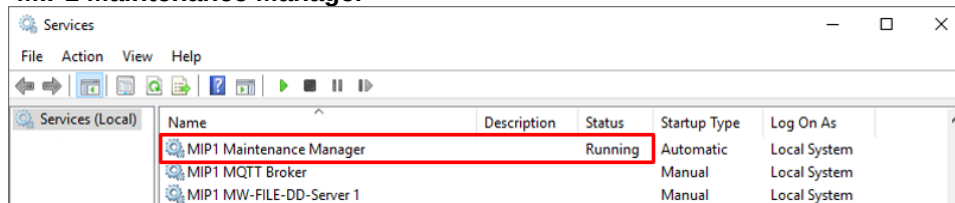

In a HYDRA Multi system environment you have to repeat those steps for **every** Maintenance Manager in all HYDRA systems.

- Check the contents of the file **hysys.dat** (e.g. d:\mip1\hysys.dat) and change them if necessary.
On a server with a HYDRA Multi system configuration check and change the file hysys.dat in all application directories of all HYDRA systems (e.g.: d:\mip2\hysys.dat, d:\mip3\hysys.dat,.etc.).
- If there is a local installation of a HYDRA Terminal on the server check the "Hostname" in its configuration file (e.g. in CTAIP.INI) and change it if necessary as described in [chapter 1.4.1](#).
- If there is a local installation of a MOC client on the server, check it's configuration and change it if necessary as described in [chapter 1.4.2](#).
- If there is a local installation of B-COMM on the server, check it's configuration and change it if necessary as described in [chapter 1.4.3](#).
- If there is a local installation of ILHYDRA on the server, check it's configuration and change it if necessary as described in [chapter 1.4.4](#).

- In the folder "MIP Administration" on the Windows Desktop all shortcuts for "**Maintenance Manager MIPx**" must be changed, e.g.:

System 1: http://**newServerName**:18080

System 2: http://**newServerName**:18081


System 3: http://**newServerName**:18082, etc.

- In the folder "MIP Administration" on the Windows Desktop the connection profile of the **Squirrel SQL Client** must be changed if necessary, e.g.:

Oracle: jdbc:oracle:thin:@**newServerName**:1521:MIP1

SQL Server: jdbc:sqlserver://**newServerName**;instanceName=MIPMS1;databaseName=mip1

e.g.:

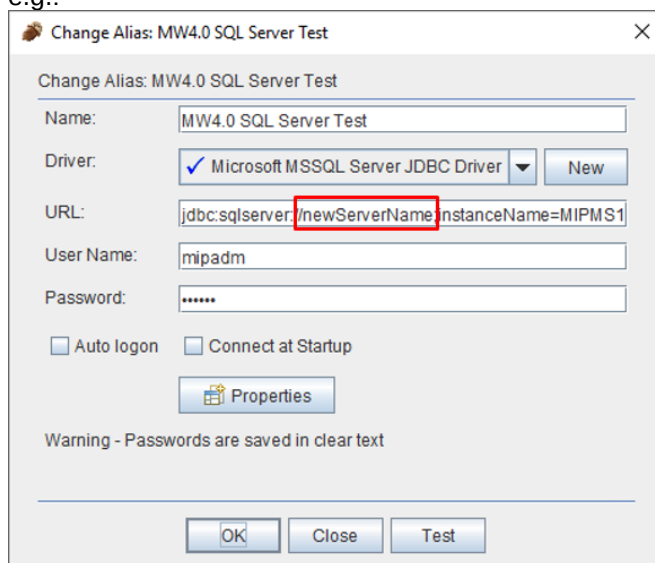

- The configuration file **connect.properties** for the **System Text Configurator** must be checked and changed if necessary (e.g.: d:\mip1\admtools\systemtextconfigurator\conf\connect.properties):

Oracle:

jdbc:oracle:thin:@**newServerName**:1521:mip1

SQL Server:

jdbc:sqlserver://**newServerName**;instanceName=mipms1;databaseName=mip1

1.3.3 Common

- Logon to the HYDRA server as user **mipadm**
- Check the configuration file of the HYDRA Maintenance Manager and change it if necessary:
 Windows: **d:\mip1\MaintenanceManager1\config\application.properties**
 Linux: **/u1/mip1/MaintenanceManager1/config/application.properties**
`mpdv.mm.host.name=newServerName`
 (this configuration is optional and might not be used at all)
- Inside JHYDRADIR of every HYDRA system check the configuration file of the Maintenance Manager and change it if necessary, e.g.:
 Windows: **d:\mip1\jdir\MaintenanceManager\config.json**
 Linux: **/u1/mip1/jdir/MaintenanceManager/config.json**
`"host" : "newServerName",`
`"masterServerHost" : "newServerName",`
- Inside JHYDRADIR of every HYDRA system check the following files belonging to the HYDRA Maintenance Manager and change them if necessary, e.g.:
 Windows: **d:\mip1\jdir\MaintenanceManager\rt\client\MOC\messystems.xml**
 Linux: **/u1/mip1/jdir/MaintenanceManager/rt/client/MOC/messystems.xml**
`<url>http://newServerName:8080/MocServices/MesBusinessService</url>`
`<instanceurl>newServerName:8080</instanceurl>`
`<registrationServer>newServerName</registrationServer>`

 Windows:
d:\mip1\jdir\MaintenanceManager\rt\client\MOC\update\UpdateConfiguration.txt
 Linux:
/u1/mip1/jdir/MaintenanceManager/rt/client/MOC/update/UpdateConfiguration.txt
`"MaintenanceManagerHost" : "http://newServerName:18080",`

 Windows:
d:\mip1\jdir\MaintenanceManager\rt\client\ignored\MOC.ApplicationSettings.config
 Linux:
/u1/mip1/jdir/MaintenanceManager/rt/client/ignored/MOC.ApplicationSettings.config
`<add key="MasterServer" value="newServerName"></add>`

- Inside JHYDRADIR of every HYDRA system check the Java configuration file and change it if necessary, e.g.:

Windows: **d:\mip1\jdir\MOC\1\config.properties**

Linux: **/u1/mip1/jdir/MOC/1/config.properties**

db.connectionstring=jdbc:oracle:thin:@**newServerName**:1521:hyd1

db.connectionstring=jdbc:sqlserver://**newServerName**;instanceName=mipms1;databaseName=mip1

wsc.bridge.hydraserver=**newServerName** (Default: 127.0.0.1)

wfm.server.url=http://**newServerName**:8180/ (Default: localhost)

mqtt.host=newServerName (Do not edit this entry! It is auto generated and updated by the MM2.)

- Inside JHYDRADIR of every HYDRA system check the configuration file of the MQTT Broker and change it if necessary, e.g.:

Windows: **d:\mip1\jdir\MQTT\broker_config.json**

Linux: **/u1/mip1/jdir/MQTT/broker_config.json**

"host" : "**newServerName**",

- On a server with HYDRA Multi system configuration repeat these actions for **every** HYDRA system.

- Check the configuration file for the Master Server and change it if necessary, e.g.:

Windows: **d:\mip1\HyInstMgrDir\Instancerepo.properties**

Linux: **/u1/mip1/hyinstmgrdir/Instancerepo.properties**

INSTANCE 1

HYDRA1.host.1=**newServerName**

On a server with HYDRA Multi system configuration there might be more system configurations available, e.g.:

INSTANCE 2

HYDRA2.host.1=**newServerName**

INSTANCE 3

HYDRA3.host.1=**newServerName**

etc.

- Except for the HYDRA services/processes which were specifically deactivated in chapter “[1.3 HYDRA Server](#)” (HYDRA Scheduler, HYDRA ECS interface and all HYDRA PDV services/processes) you can now reactivate the automatic start of HYDRA:


Linux:

rename the file \$HYDRADIR/hy_start.scrxxx to **hy_start.scr**, e.g.:

```
mv /u1/mip1/hy_start.scrxxx /u1/mip1/hy_start.scr
```

Windows:

Change the startup type of all MIP(x) services back to “**Automatic**” which you have changed to “**Manual**” before, e.g.: “MIP Server Agent”, “MIP IPC-Server”, “MIP1 Server Agent”, “MIP1 Maintenance Manager”

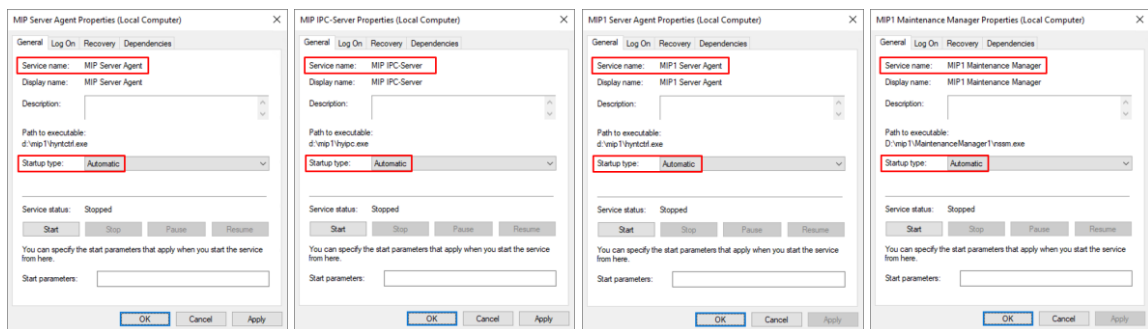

- Restart the server.**
- Logon to the HYDRA server as user **mipadm**
- Start the MOC Client (if necessary you might need to check it's configuration first and change it as described in [chapter 1.4.2](#)).
- Check the HYDRA Path configurations and change entries in column “**Host**” if necessary:

	Path	Protocol	Host	Port	URL path	User	Description
▶	DNC	file	hydra	0	1\dncdaten		sample path for DNC
	DOC	file	hydra	0	1\custom\bde\dokumente		sample path for documents
	EFORMCUS	file	localfile	0	d:\mip1\1\custom\caq\reports		path for external reports (customer)
	EFORMSTD	file	localfile	0	d:\mip1\1\db_ace		path for external reports (standard)
	HYDRA	hydra	hydra	0	./1/grafik/bde		AIP path for workplace pictures
	MOCERRS	file	localfile	0	d:\mip1\1\err		MOC path for system error files

- Check the configuration of the **HYDRA Scheduler**.
If the hostname or the IP-address of the HYDRA server is used anywhere (e.g. for interface configurations) change it if necessary.

- Check the MLE configuration.
If the hostname or the IP-address of the HYDRA server is used anywhere change it if necessary.
- On a server with HYDRA Multi system configuration repeat these actions for **every** HYDRA system.
- All specifically deactivated HYDRA services/processes can now be reactivated and started again, e.g.:
HYDRA Scheduler (e.g. "MIP1 Scheduler")
HYDRA ECS interface (e.g. "MIP1 ECS Inbound Dispatcher 0", "MIP1 ECS Server FP 1", "MIP1 ECS Server SAP 1")
All **HYDRA PDV** services/processes (e.g. "MIP1 HYDRA-PDV-Communication Server" and "MIP1 HYDRA-PDV-Configuration Monitor").
- Make sure that your HYDRA system runs properly.
- If you created a copy of an existing HYDRA system please make absolutely sure that any mutual interactions with the source system can be excluded.
Only then the duplicated system can be released from its isolated environment.

1.4 HYDRA Clients

The configurations of all HYDRA Clients must be checked and changed if necessary.

Please check the proper functionality of the client as soon as you have changed its configuration.

1.4.1 Terminal

Depending on the Terminal version check the configuration for the HYDRA server and change it if necessary.

- Windows Terminal **AIP2**: file **CTAIP.INI** (e.g. c:\mpdv\aip2\ctaip.ini):

hostname=**newServerName** or **newIPaddress**

- CT-541: In the configuration menu enter **newIPaddress** for "HOST – IP":

```
1 = IP-address
2 = Sub net mask
3 = IP-router
3 = HOST - IP
4 = Terminal number
6 = Set Intel
7 = Display
***** < 5> **'
```

- CTP-340: In the configuration menu enter **newIPaddress** for "Server IP Address" :

```
Server IP Address
Val:  XXX.XXX.XXX.XXX
<      C      >  ESC  CR
```

1.4.2 MES Operation Center (MOC)

The configuration file **MOC.ApplicationSettings.config** of all MOC clients must be checked and changed if necessary (e.g. C:\Program Files (x86)\MPDV\HYDRA 8\MOC\MOC.ApplicationSettings.config):

```
<add key="MasterServer" value="newServerName"></add>
```

Check if one or more of your MOC clients are using the configuration file **messystems.xml** (e.g. C:\Program Files (x86)\MPDV\HYDRA 8\MOC\messystems.xml).


By using the local configuration file **messystems.xml** the global connect information provided by the Master Server (directory: HyInstMgrDir) on the HYDRA server can be overridden.

For every MOC client using the local file **messystems.xml** the file must be checked and changed if necessary:


```
<mesSystems>
  <name>HYDRA 1</name>
  <url>http://newServerName:8080/MocServices/MesBusinessService</url>
  <clientid>1</clientid>
  <instanceurl>newServerName:8080</instanceurl>
</mesSystems>
```


1.4.3 B-COMM


Start the B-COMM service manager as administrator:

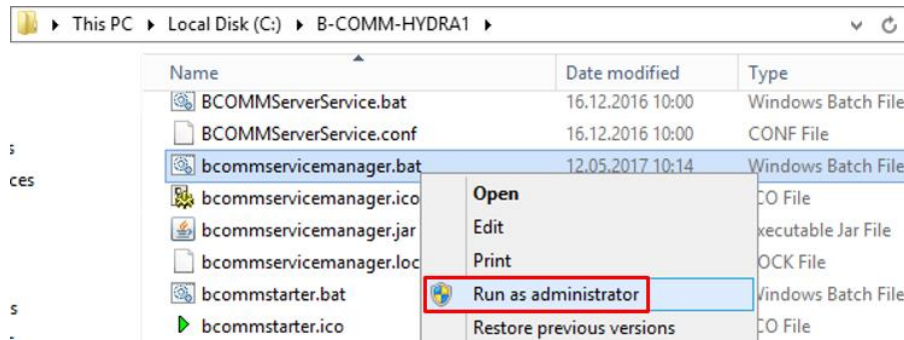

Remove the installed B-COMM service:

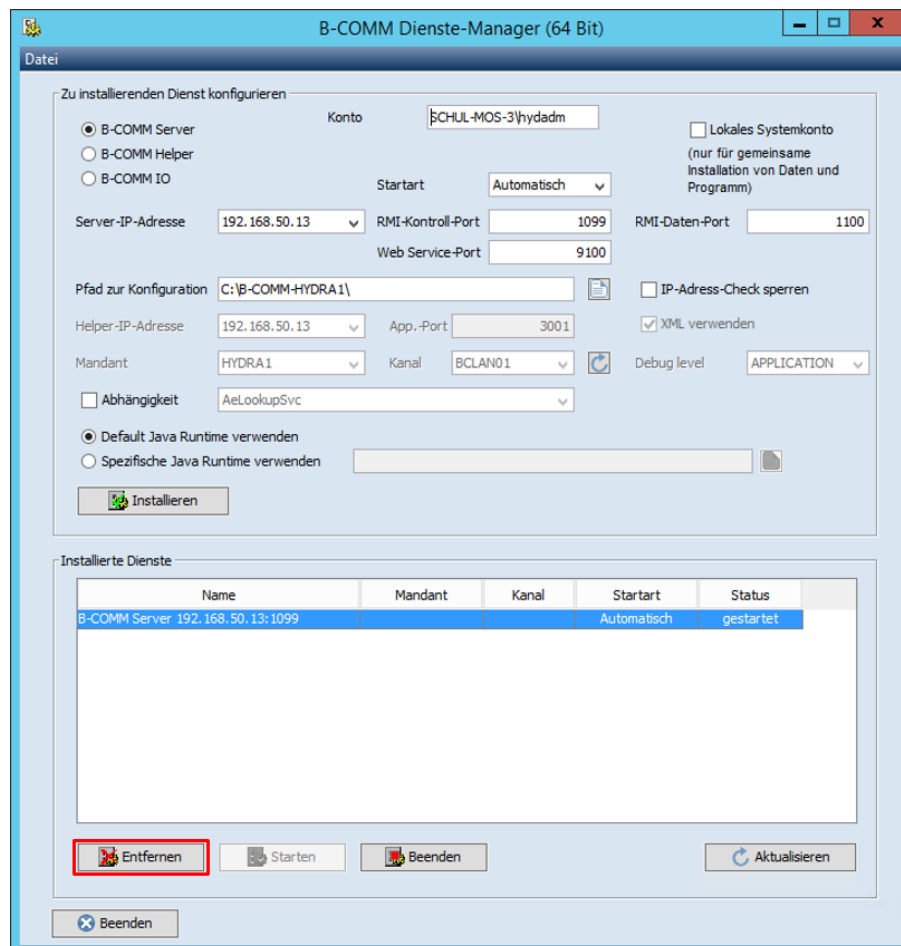

Enter the new hostname or the IP-address and install the B-COMM service again:

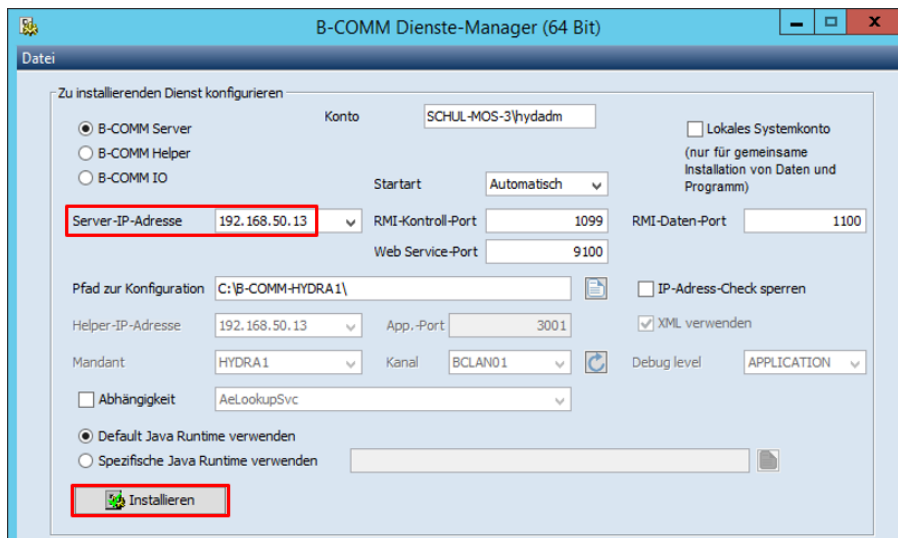

1.4.4 ILHYDRA

Before changing the configuration all ILHYDRA processes/services must be stopped.

Inside the installation directory of ILHYDRA (e.g. d:\mip1\ilhydra) check the following files and change them if necessary:

- **ilhydra.ini**


```
...  
[DDCOM]  
Host = "newIPAddress"  
...
```

- **clientkbudp1\kbudp1.it1**

```
...  
IPADDR = newIPAddress;  
...
```

If the file **kbudp1.it1** was changed, it is necessary to do a new compilation using the InterLink Client (ilcbenz.exe).

This procedure is password protected and can only be done when you are assisted by personnel of MPDV Mikrolab GmbH.

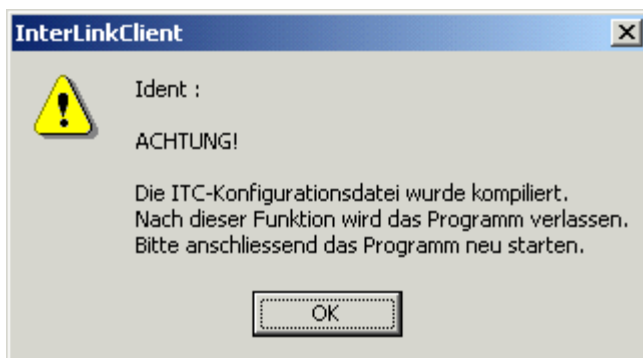

1.4.5 PDV


1.4.5.1 HYDRA Client MOC

Using MES Operation Center (MOC):

In Menu **System administration – System settings – INI data configuration** for configuration **WEBSERVICE** check if the key **SERVICEURL** might have been explicitly set to “Active”.

Change it if necessary:

<http://newServerName:8080/MpdvServices/MesPdvService>

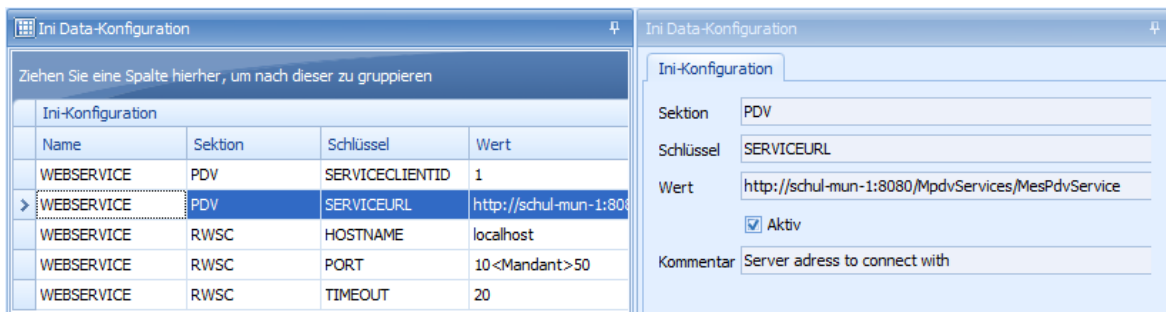

1.4.5.2 HYDRA Terminal

- Check the local file **PCC.INI** (e.g. C:\MPDV\AIP2\pcc.ini) and change it if necessary:

```
...
[WSK]
Host=newIPAddress
...
```


- Check the local file **PDV_DLL.INI** (e.g. C:\MPDV\AIP2\pdv_dll.ini) and change it if necessary:

```
...
[Transport]
IP=newIPAddress
...
```

- Restart the HYDRA Terminal.

1.4.6 CAQ MDI Interface

Check if there is a connection to an MDI server activated in the **HYDRA Scheduler** (e.g. with license HYD-MDI):

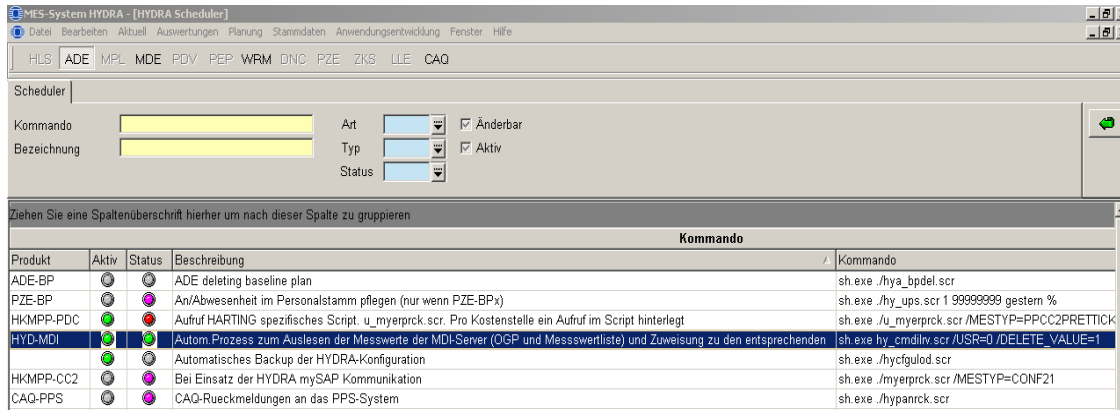

The screenshot shows the 'HYDRA Scheduler' window with the 'CAQ' tab selected. The 'Kommando' field is empty, and the 'Bezeichnung' field is also empty. The 'Art' dropdown is set to 'Änderbar', and the 'Status' dropdown is set to 'Aktiv'. Below the input fields, there is a table with columns: Produkt, Aktiv, Status, Beschreibung, and Kommando. The table lists several commands, with 'HYD-MDI' highlighted in blue.

Produkt	Aktiv	Status	Beschreibung	Kommando
ADE-BP			ADE deleting baseline plan	sh.exe ./hya_bpdel.scr
PZE-BP			An/Abswesenheit im Personalstamm pflegen (nur wenn PZE-BPx)	sh.exe ./hy_ups.scr 1 99999999 gestern %
HKMPP-PDC			Aufruf HARTING spezifisches Script, u. myerprck.scr. Pro Kostenstelle ein Aufruf im Script hinterlegt	sh.exe ./u_myerprck.scr /MESTYP=PPCC2PRETTICK
HYD-MDI			Autom. Prozess zum Auslesen der Messwerte der MDI-Server (OGP und Messwertliste) und Zuweisung zu den entsprechenden	sh.exe hy_cmdiln.scr /USR=0 /DELETE_VALUE=1
HKMPP-CC2			Automatisches Backup der HYDRA-Konfiguration	sh.exe ./hycfgulod.scr
CAQ-PPS			Bei Einsatz der HYDRA mySAP Kommunikation	sh.exe ./myerprck.scr /MESTYP=CONF21
			CAQ-Rueckmeldungen an das PPS-System	sh.exe ./hypanrck.scr

If this manual is used to create a working copy of an already running HYDRA system, e.g. creating a test system as copy of a productive system, you have to **deactivate** the access to the MDI server.


If not, you will experience loss of data and inconsistent data sets.

1.4.7 WFM Workflow Management


At the Workflow Management the Server entry needs to be changed by using the Installation Wizard. This creates a second directory tree in which all entries of the old server name must be changed.

The old tree has to be deleted at the end.


In the example, the server name "w2012r2sql12en" changed to "192.168.70.142".

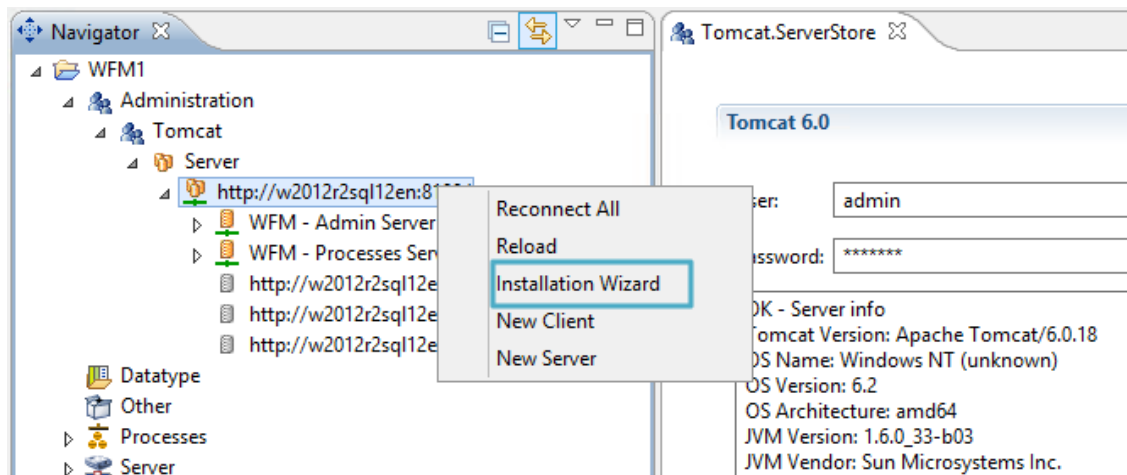


Start Wizard.

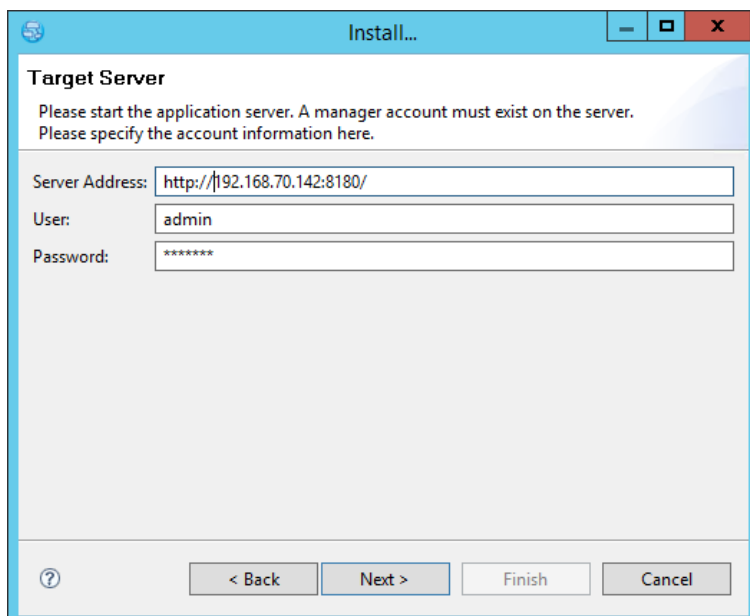


Change Server name.

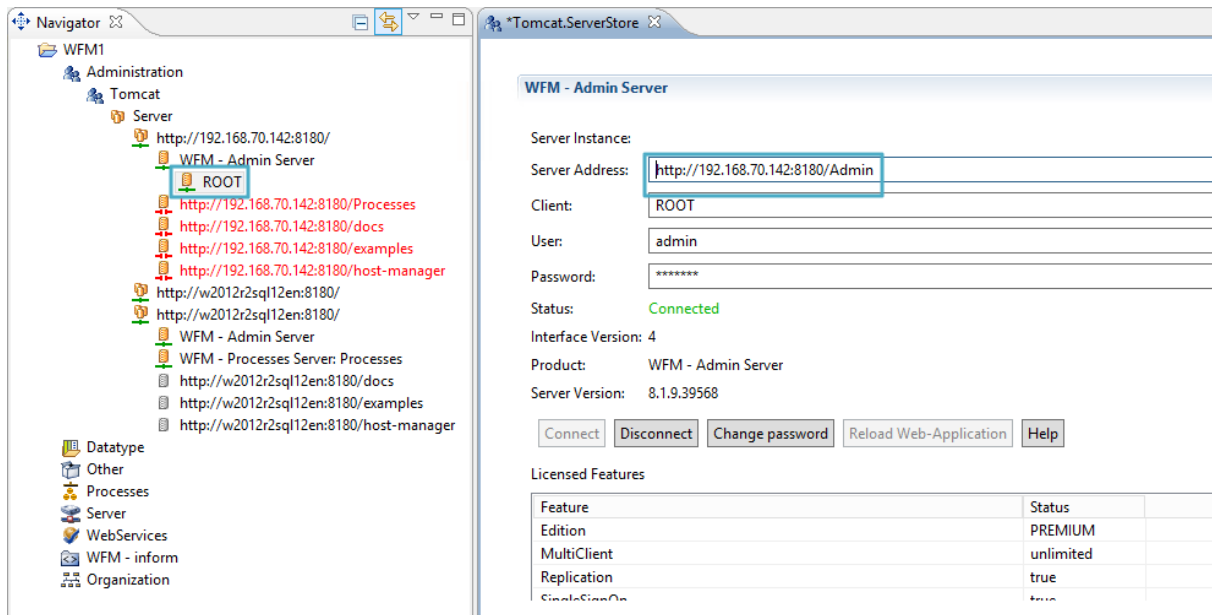


Change „Admin Server“ Entry.

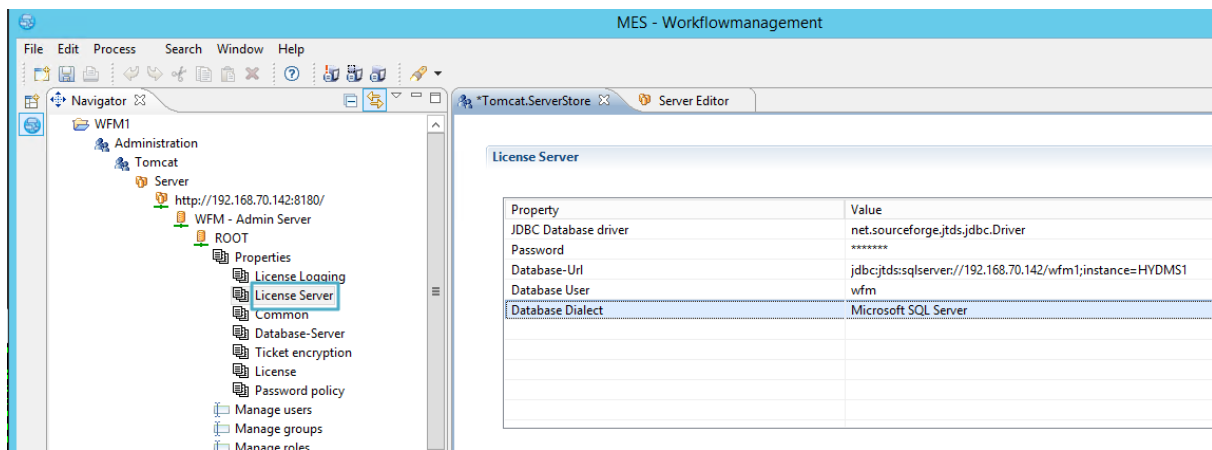


Change License-Server Entry.

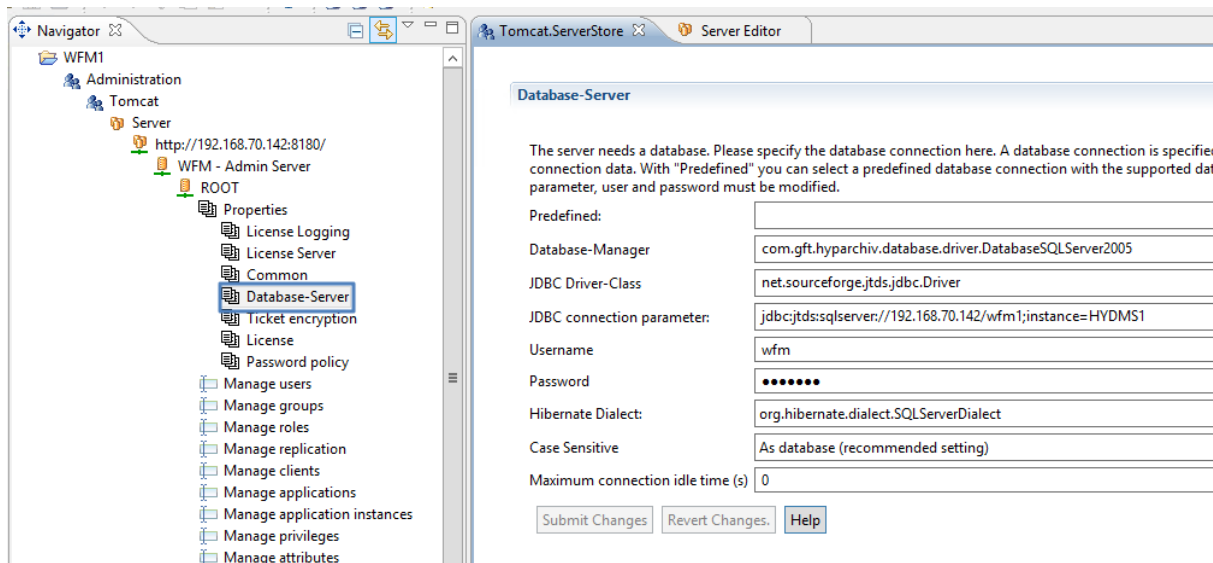


Change Admin Database-Server Entry.

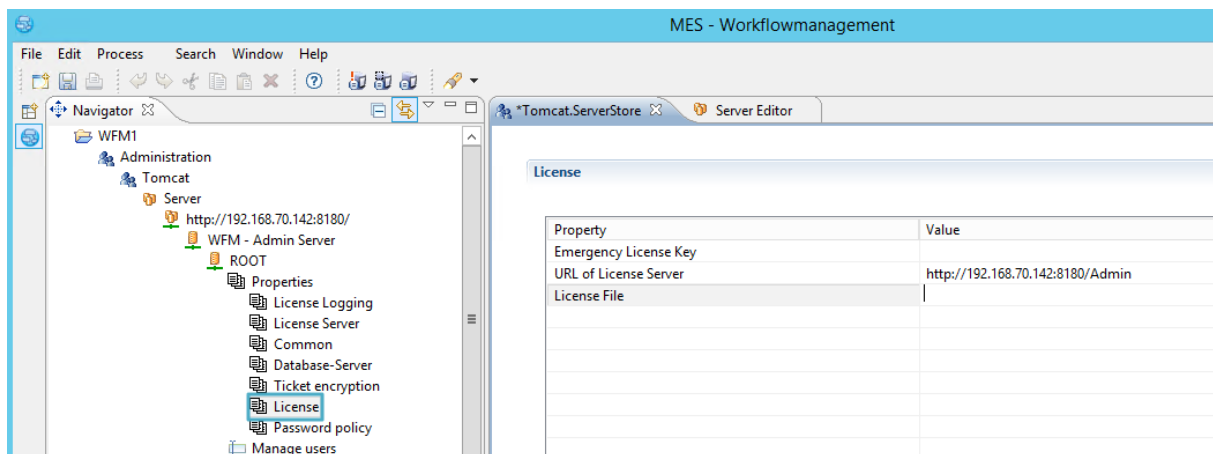


Change License Entry.

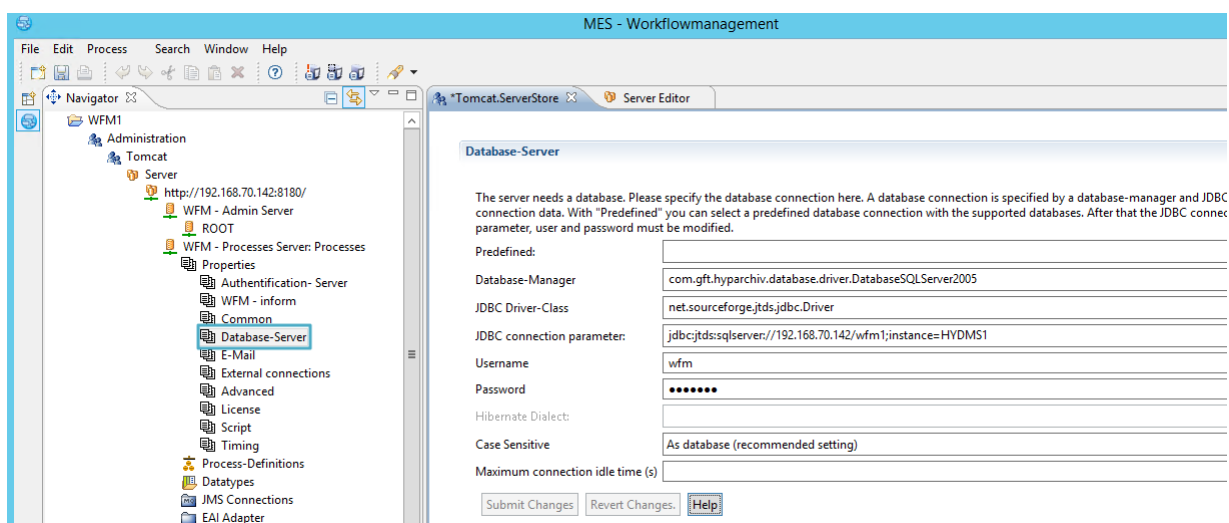


Change Processes Database-Server Entry.

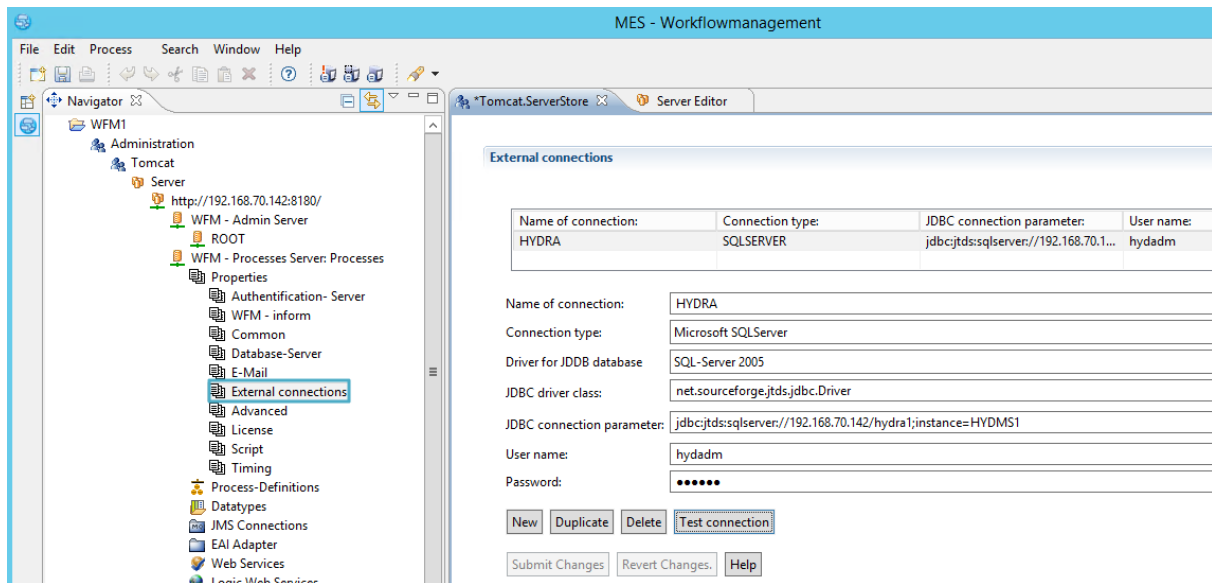


Change Processes External Connections Entry.

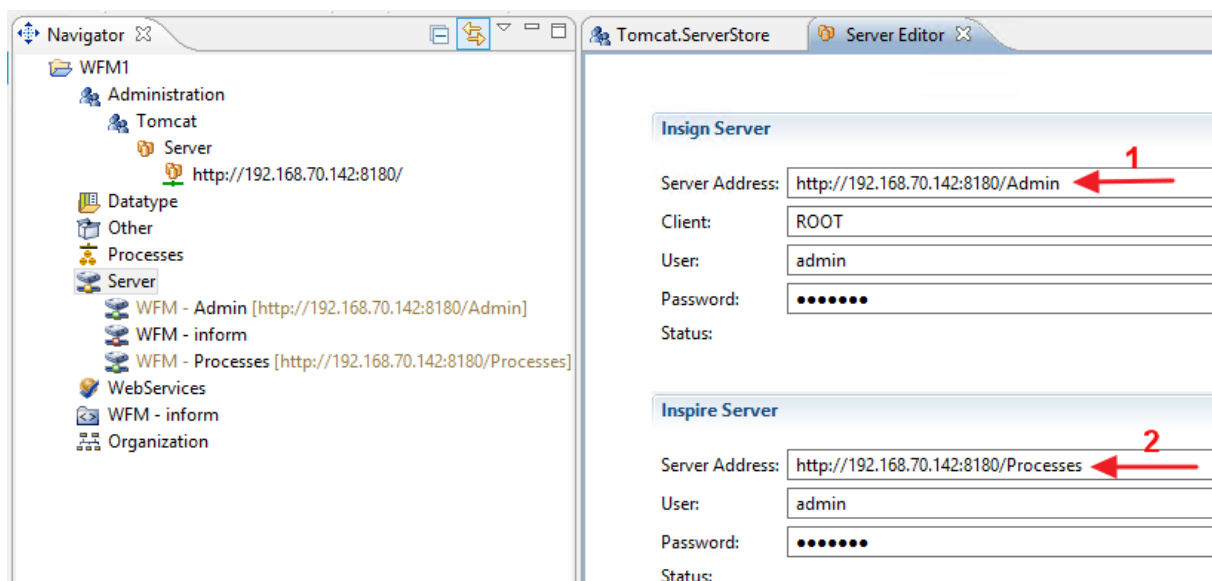

Change the Insign and Inspire Server Addresses.

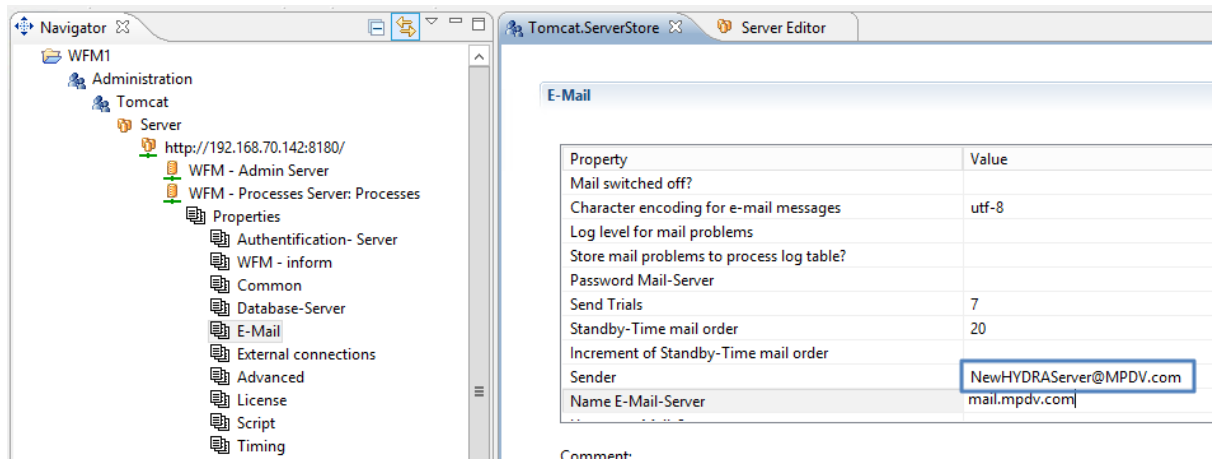

Change the Name Mail-Sender.

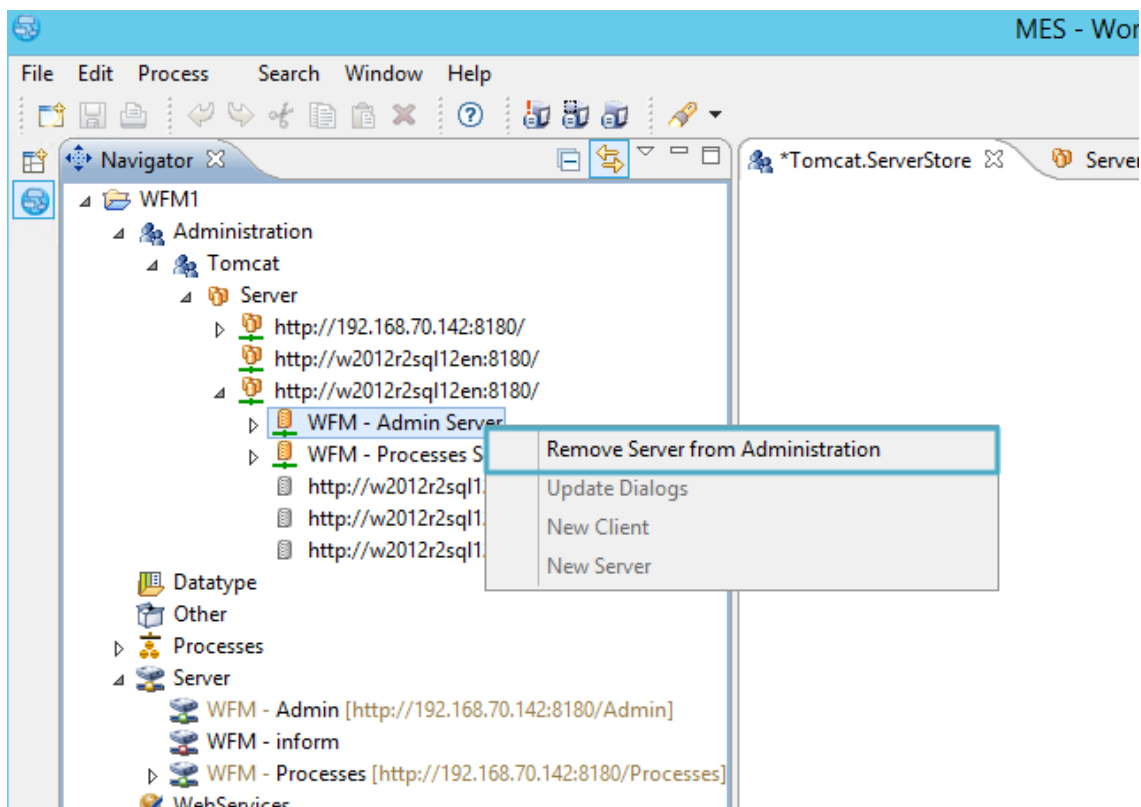

Delete all old Entry's from the Directory Tree.


1.4.8 SmartMES (SMA)

The SMA configuration file (Default: `c:\inetpub\wwwroot\SMA\Web.config`) on the SMA server (usually identically with the HYDRA Windows server) must be checked and the following line must be changed:

Hostname or IP address for the HYDRA MasterServer:

```
<add key="MasterServer" value="newServerName" />
```

On the SMA server (usually identically with the HYDRA Windows server) the name of the connection to the HYDRA server must be changed inside the **Internet Information Services (IIS) Manager**:

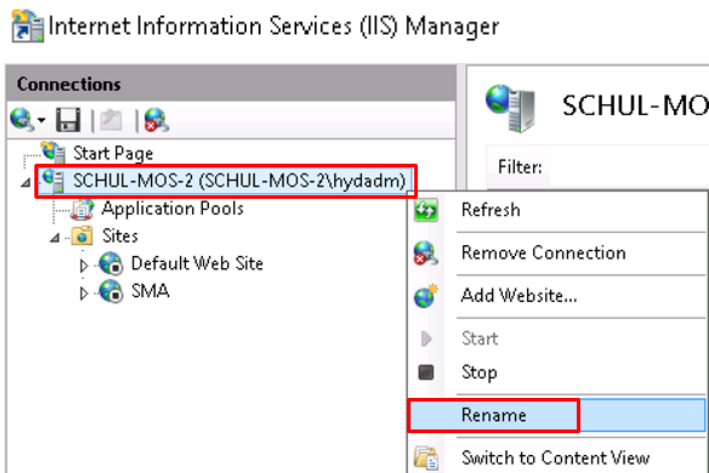

Check for any URL shortcuts for SmartMES (SMA), e.g.:  **SmartMES (SMA) MIP1** inside the folder "MIP Administration" on the Windows Desktop, and change the hostname or the IP address if necessary:

