

1 Data Transfer via Excel


Experience has taught that preparing data in Microsoft Excel™ delivers the best results. But in general data may also be prepared in any other program. The paragraphs that follow show two possibilities of data provision.

Data provision in Excel (file *.xls)

MPDV provides a sample file to prepare data in Excel. Selected master data have already been prepared in this file.

The Excel file provides a separate spreadsheet for each master data object indicating the real name of this object. The respective spreadsheets already include the available acronyms. The columns, which the user has to fill out with user data, are highlighted in yellow. The corresponding documents describe the respective meaning of acronyms.

Every single spreadsheet has to be saved as "text (tab delimited) (*.txt)" to be able to transfer the data from the Excel worksheet into the HYDRA DLG format after completion.

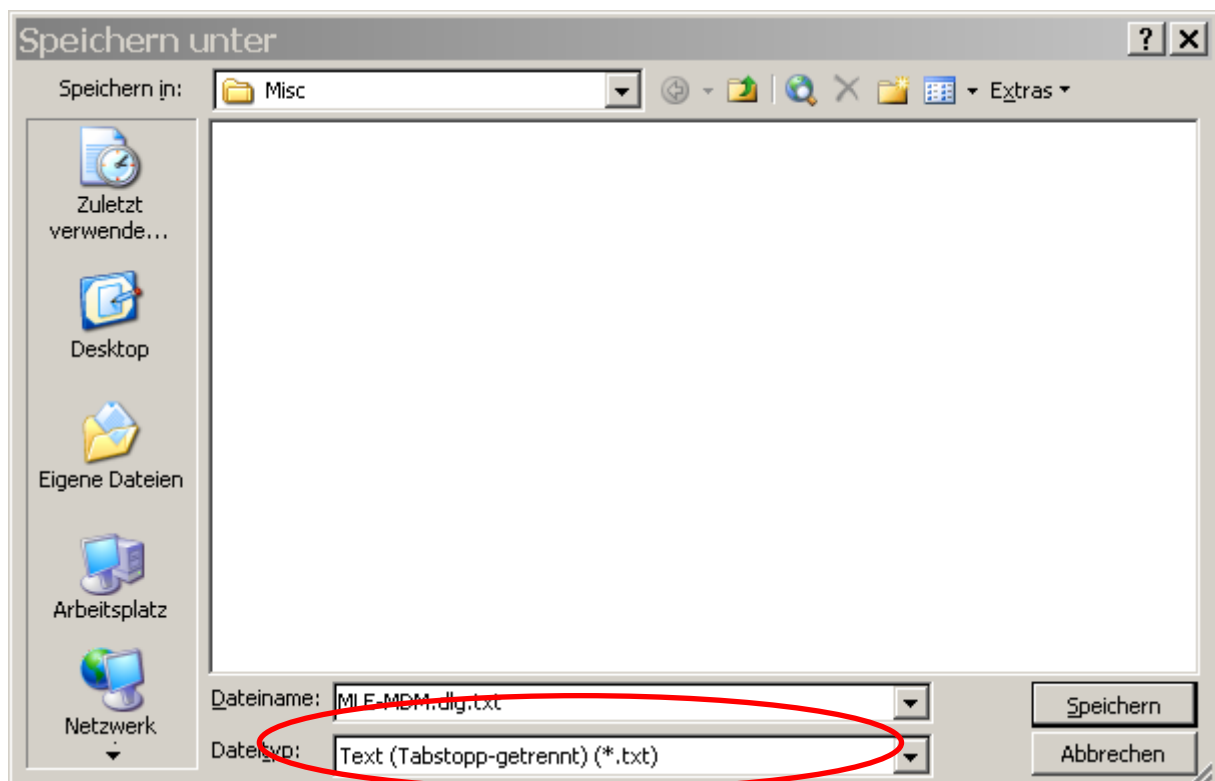

The resulting text file (MLE-MDM.DLG in the above example) has to be reworked in a text editor. In this case, the tabs included in the file have to be removed. This can be made in any text editor, unless it provides this feature. The TextPad (www.textpad.com) program has proved its worth in this connection. The procedure is described in an example on the basis of this program.

Once the file has been saved in the above-mentioned format in Excel, it is available as text file including tabs.

DLG=FERTVAR. INSERT>	> FERTVAR. ATK=>	> FERTVAR. MGRP=>	> FERTVAR. RES
DLG=FERTVAR. INSERT>	> FERTVAR. ATK=>	> FERTVAR. MGRP=>	> FERTVAR. RES
DLG=FERTVAR. INSERT>	> FERTVAR. ATK=>	> FERTVAR. MGRP=>	> FERTVAR. RES
DLG=FERTVAR. INSERT>	> FERTVAR. ATK=>	> FERTVAR. MGRP=>	> FERTVAR. RES
DLG=FERTVAR. INSERT>	> FERTVAR. ATK=>	> FERTVAR. MGRP=>	> FERTVAR. RES
DLG=FERTVAR. INSERT>	> FERTVAR. ATK=>	> FERTVAR. MGRP=>	> FERTVAR. RES
DLG=FERTVAR. INSERT>	> FERTVAR. ATK=>	> FERTVAR. MGRP=>	> FERTVAR. RES

These tabs may now be removed by the “search/replace” function. To do so, select a tab, start the search/replace function and replace the tab by “” (nothing).



Now we have a file in the HYDRA DLG format that can be imported in HYDRA.

DLG=FERTVAR. INSERT	FERTVAR. ATK=	FERTVAR. MGRP=	FERTVAR. R
DLG=FERTVAR. INSERT	FERTVAR. ATK=	FERTVAR. MGRP=	FERTVAR. R
DLG=FERTVAR. INSERT	FERTVAR. ATK=	FERTVAR. MGRP=	FERTVAR. R
DLG=FERTVAR. INSERT	FERTVAR. ATK=	FERTVAR. MGRP=	FERTVAR. R
DLG=FERTVAR. INSERT	FERTVAR. ATK=	FERTVAR. MGRP=	FERTVAR. R
DLG=FERTVAR. INSERT	FERTVAR. ATK=	FERTVAR. MGRP=	FERTVAR. R
DLG=FERTVAR. INSERT	FERTVAR. ATK=	FERTVAR. MGRP=	FERTVAR. R

Data provision as text file (file *.DLG)

A file in the HYDRA DLG format needs to be generated anyway, even if Excel is not used. Such a file has the following, exemplary structure:

DLG=FERTVAR . INSERT	FERTVAR . ATK=	FERTVAR . MGRP=	FERTVAR . R
DLG=FERTVAR . INSERT	FERTVAR . ATK=	FERTVAR . MGRP=	FERTVAR . R
DLG=FERTVAR . INSERT	FERTVAR . ATK=	FERTVAR . MGRP=	FERTVAR . R
DLG=FERTVAR . INSERT	FERTVAR . ATK=	FERTVAR . MGRP=	FERTVAR . R
DLG=FERTVAR . INSERT	FERTVAR . ATK=	FERTVAR . MGRP=	FERTVAR . R
DLG=FERTVAR . INSERT	FERTVAR . ATK=	FERTVAR . MGRP=	FERTVAR . R
DLG=FERTVAR . INSERT	FERTVAR . ATK=	FERTVAR . MGRP=	FERTVAR . R

File import using the HYDRA server

The file can also directly be imported to HYDRA on the HYDRA server. But the procedure is slightly different for Windows and Unix.

File import with Windows

Connect to the HYDRA server (e.g. via RemoteDesktop). Start the Dos box from the HYDRA administration folder on the desktop. Please choose the Dos box for the correct system, if a HYDRA multi-system installation is in use.

Start the posting program in the Dos box as follows:

```
Hymwb.exe -d -u9999 -b<file name> > <file name>.pro
```

In case of the example from section 3:

```
Hymwb.exe -d -u9999 -bMLE-MDM.dlg > MLE-MDM.pro
```

The program is started by the parameter “-d” with developer traces. They ease the diagnosis if errors occur during the import. By entering the addition “> dlg.pro” the output is redirected into a log file, which simplifies checking at a later point in time.

Please note: The import only works properly if the posting program is run in the HYDRA directory. The file to be imported may be stored in any directory, the corresponding path has to be indicated in the parameter “-b”, e.g. „\importdir\datei.dlg“.

File import with Unix

Connect to the HYDRA server (e.g. via Telnet). Please choose the correct system if a HYDRA multi-system installation is in use.

Start the posting program as follows:

```
hymwb.out -d -u9999 -b<file name (case sensitive!)> > DLG.pro
```

In case of the example from section 3:

```
hymwb.out -d -u9999 -bMLE-MDM.DLG > MLE-MDM.pro
```

The program is started by the parameter “-d” with developer traces. They ease the diagnosis if errors occur during the import. By entering the addition “> dlg.pro” the output is redirected into a log file, which simplifies checking at a later point in time.

Please note: The import only works properly if the posting program is run in the HYDRA directory. The file to be imported may be stored in any directory. The corresponding path has to be indicated in the parameter “-b”, e.g. „\importdir\datei.dlg“.

Import of object files

In case objects include files (e.g. DNC), the files are copied to the target folder using the operating system functions. This can happen prior to or after the BAPI process. But file management and processing have to be configured beforehand. This depends on the application and is explained in the corresponding documents dealing with the application (e.g. the resource type DNC including the correct path configuration has to be created and configured).