

Manual

Workflow for Absence Time Approval PZW-WFG 8.1

Version 1.0.54

Last changed on: 19.06.2020

Copyright

©Copyright 2020 All rights reserved.

SAP® and R/3® are registered trademarks of SAP AG.

WINDOWS® is a registered trademark of Microsoft Corporation.

MPDV® and HYDRA® are registered trademarks of MPDV Mikrolab GmbH.

ORACLE® is a registered trademark of ORACLE Corporation, California, USA.

Copying and distribution of this documentation or any part thereof, for any purpose or in any form, is prohibited without prior written permission from MPDV Mikrolab GmbH.

The information contained in this documentation is subject to change without prior notices.

Contents

1	Workflow for Absence Time Approval - Overview.....	4
2	Configuration for Absence Workflow.....	5
3	Request Absences at the Terminal.....	18

1 Workflow for Absence Time Approval - Overview

--	--	--

Purpose

Application Service for mapping a user-friendly and transparent absence time approval workflow.

Implementation Considerations

You use the function package if:

- you wish to provide employees with the possibility to request absence times on PZE or BDE terminals (only available at specific terminal types).
- the relevant supervisors are to be notified if an absence time was requested so that they may approve or reject the request.
- employees are to be informed, for example, when their request is approved or rejected by means of a message on the labor time recording terminal.

Integration

Requested absence times are displayed in italics in [personnel scheduling](#) and can thus be considered in the planning of available employees.

Features

- Absence workflow.
 - Terminal dialog for employees to request absence times (e.g. leave, flextime reduction ...) and display their requested and approved absence times at the PZE or BDE terminal.
 - Notification of the supervisor with regard to requested absence times (e.g. by e-mail).
 - Function for approving or rejecting requested absence times.
 - Withdrawal by the employee of absence requests not yet processed.
 - Notification of the requesting party, e.g. at the PZE terminal or by e-mail, as to whether the absence time was approved or rejected.

2 Configuration for Absence Workflow

Overview

The absence workflow enables employees to request absence times via the Internet and/or Intranet. After filing a request, the supervisor will be informed and can then approve or reject the request. Subsequently, the employee will receive a notification via e-mail or on the terminal as to whether or not the absence request was approved.

The settings for the absence workflow are made at various locations in MOC:

Configuration – Basic Settings

Menu	System administration → System settings → Basic settings
Transaction code	setup
Function authorization	setup

In the ESK tab of the [basic settings](#) screen, the e-mail server must be entered so that notifications regarding absence times and their approval and/or rejection can be forwarded to the relevant employees by e-mail:

The screenshot shows the 'Basic settings' window with the 'ESK' tab selected. The window has a toolbar with icons for 'Request data', 'Cancel', 'Print preview', 'Print all', 'Edit', 'Save', and 'Help'. The 'Basic settings' section has tabs for 'General', 'BDE', 'HLS', 'PZE', 'PDV', 'MPL', and 'ESK'. The 'ESK' tab contains the following fields:

SMTP server	smtp.bsp.intern
Port	0
Timeout	0 [ms]
Sender	automail@bsp.de
SMS path	SMS
Pager path	PAGER

Field Descriptions

In this regard, the IP address of the SMTP server and the sender entered in the e-mails to be sent are of particular importance.

SMTP server

The IP address or the name of the local SMTP server for sending e-mails is to be entered in the SMTP server field.

SMTP sender

A central e-mail account can be entered here. E-mails sent via HYDRA escalation management will then have this central account as sender.

Event Configuration in Escalation Management

Menu	Master data → Escalation management → Escalation configuration
Transaction code	esccfg
Function authorization	esccfg

In the [event configuration](#), the events for requesting, approving and rejecting absence times are entered:

Reference	Event	Designation	Recipient t...	Recipient	Priority	Color	Active	ESK mode
1	DB.FILL_1E...	Fill level of ...	Function	HYDRA-Ad...	1	Light red	☒	F
2	FILESYS.FI...	Fullstandsp...	Function	HYDRA-Ad...	1	Light red	☒	F
3	ESK.NO_PE...	Keine Perso...	Function	Dispatcher	1	Pink	☒	F
4	MST.MALFU...	Machine ma...	Function	Instandsetz...	1	Yellow	☒	F
5	SAP.INBOU...	Keine Verbi...	Person		1	Turquoise	☒	F
6	TNR.OFFLINE	Terminal of...	Function	HYDRA-Ad...	2	Light yellow	☒	F
7	TNR.OFFLINE	Terminal of...	Function	HYDRA-Ad...	1	Light red	☒	F
8	SAP.INBOU...	min 1 Daten...	Function	HYDRA-Ad...	9	Light blue	☒	F
9	SAP.INBOU...	min 1 Daten...	Function	HYDRA-Ad...	9	Light blue	☒	F
10	SAP_PP_AV...	Kein Updat...	Function	HYDRA-Ad...	5	Green	☒	F
11	SAP.OUTB...	Keine Verbi...	Function	HYDRA-Ad...	1	Light red	☒	F
12	FZ.APPLIC...	Absence ap...	Function	HYDRA-Ad...	1	Green	☒	F
13	FZ.APPLIC...	Application ...	Function	HYDRA-Ad...	1	Pink	☒	F
14	FZ.APPLIC...	Application ...	Function	HYDRA-Ad...	1	Turquoise	☒	F
15	ZNR.OPEN...	Entrance o...	Function	HYDRA-Ad...	1	Light red	☒	F
16	ZNR.OPEN...	Entrance o...	Function	HYDRA-Ad...	1	Light red	☒	F

Field Descriptions

Event


FZ.APPLICATION_FILED -> triggered when an absence time is requested.

FZ.APPLICATION_ALLOWED -> triggered after approval of an absence request.

FZ.APPLICATION_REJECTED -> triggered after rejection of an absence request.

FZ.APPLICATION_WITHDRAWN -> triggered after withdrawal of an absence request by an employee.

Event tab for FZ.APPLICATION_FILED

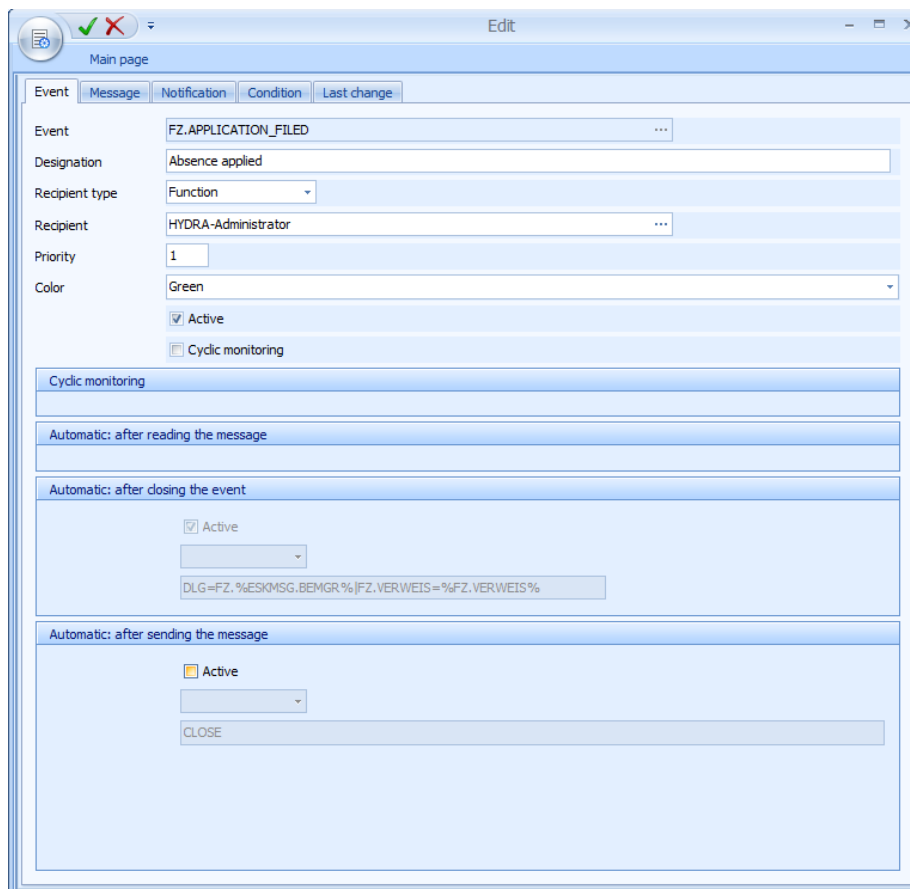

Event

Message

Notification

Condition

Last change

Event

Designation

Recipient type

Recipient

Priority

Color

Active

Cyclic monitoring

Cyclic monitoring

Automatic: after reading the message

Automatic: after closing the event

Active


DLG=FZ. %ESKMSG.BEMGR%|FZ.VERWEIS=%FZ.VERWEIS%

Automatic: after sending the message

Active

CLOSE


Event tab for FZ.APPLICATION_ALLOWED

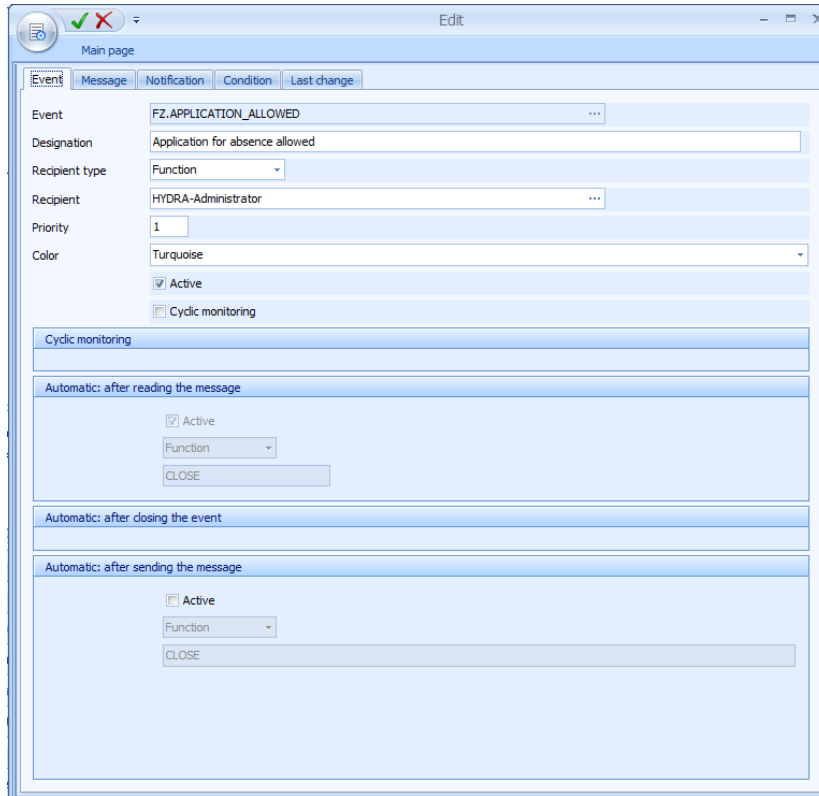

The screenshot shows a software window titled "Edit" with a "Main page" tab. The "Event" tab is selected, displaying the configuration for the "FZ.APPLICATION_ALLOWED" event. The event is designated as "Application for absence allowed" and is sent to the "HYDRA-Administrator" via "Function". The priority is set to "1" and the color is "Turquoise". The event is active, and cyclic monitoring is disabled. The "Automatic" section shows that the event is active after reading the message, with a "CLOSE" button available. The "Automatic" section after closing the event and after sending the message is currently inactive.

Field	Value
Event	FZ.APPLICATION_ALLOWED
Designation	Application for absence allowed
Recipient type	Function
Recipient	HYDRA-Administrator
Priority	1
Color	Turquoise
Active	☒
Cyclic monitoring	☐
Automatic: after reading the message	☒ Active
Automatic: after closing the event	☐ Active
Automatic: after sending the message	☐ Active

Event tab for FZ.APPLICATION_REJECTED

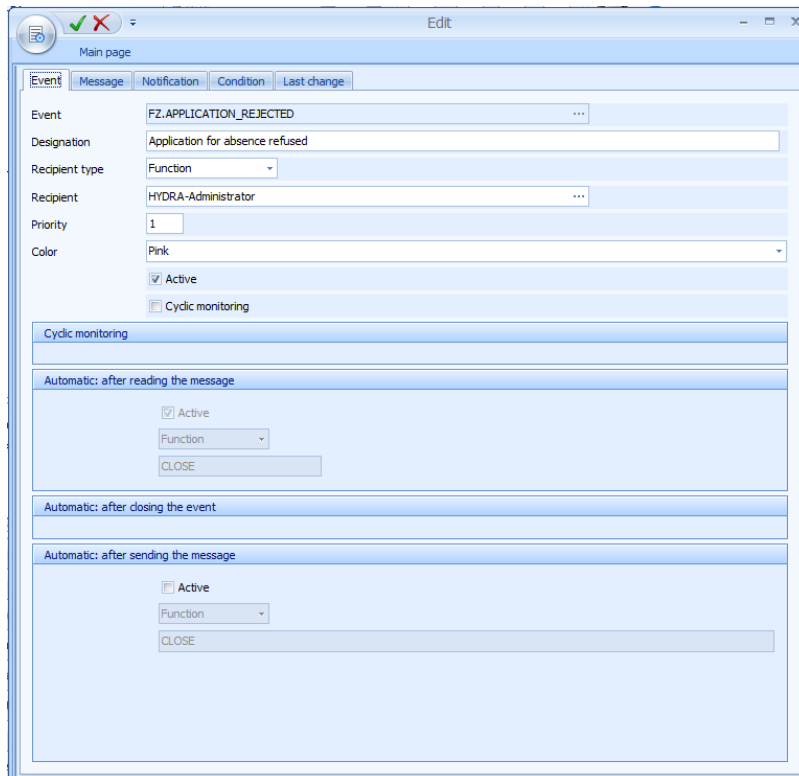

The screenshot shows a software window titled "Edit" with a "Main page" tab. The "Event" tab is selected, displaying the configuration for the "FZ.APPLICATION_REJECTED" event. The event is designated as "Application for absence refused" and is sent to the "HYDRA-Administrator" via "Function". The priority is set to "1" and the color is "Pink". The event is active, and cyclic monitoring is disabled. The "Automatic" section shows that the event is active after reading the message, with a "CLOSE" button available. The "Automatic" section after closing the event and after sending the message is currently inactive.


Field	Value
Event	FZ.APPLICATION_REJECTED
Designation	Application for absence refused
Recipient type	Function
Recipient	HYDRA-Administrator
Priority	1
Color	Pink
Active	☒
Cyclic monitoring	☐
Automatic: after reading the message	☒ Active
Automatic: after closing the event	☐ Active
Automatic: after sending the message	☐ Active

Event tab for FZ.APPLICATION_WITHDRAWN

Entries in the *Message* and *Notification* tabs are made in analogy to the approval of an absence request.

Message tab

You may define the subject and text of the message in the *Message* tab

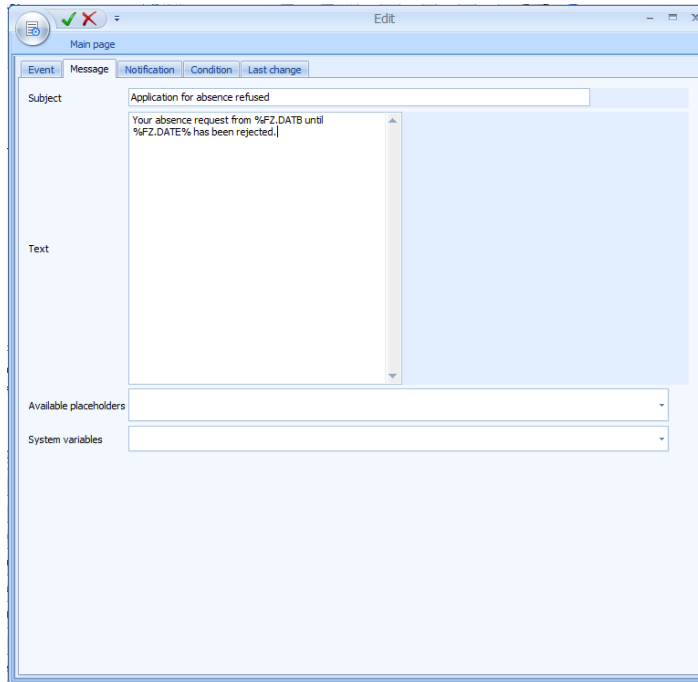

Examples:

Person %FZ.PNR% %FZ.NAME:PNR% has requested %FZ.BEZL:ENTLTMOD% from %FZ.DATB date dd.mm.yyyy% through %FZ.DATE date dd.mm.yyyy%.

Your absence request for the period from %FZ.DATB date dd.mm.yyyy% through %FZ.DATE date dd.mm.yyyy% absence %FZ.ENTLTMOD% %FZ.BEZL:ENTLTMOD% was approved.

Your absence request for the period from %FZ.DATB date dd.mm.yyyy% through %FZ.DATE date dd.mm.yyyy% absence %FZ.ENTLTMOD% %FZ.BEZL:ENTLTMOD% was rejected.

The following placeholders are available for creating the message:

Event	Identifiers	Description
FZ.APPLICATION_FILED FZ.APPLICATION_ALLOWED FZ.APPLICATION_REJECTED FZ.APPLICATION_WITHDRAWN	FZ.DATB	Start date
	FZ.BEZL	Comment
	FZ.BEZL:ENTLTMOD	Absence designation
	FZ.VERWEIS	Unique record number
	FZ.DATE	End date
	FZ.ENTLTMOD	Absence payment
	FZ.FIR	Company for personnel number
	FZ.BEZX:ENTLTMOD	Absence abbreviation
	FZ.PNAME	Person's last name
	FZ.NAME:PNR	Person's name
	FZ.PNR	Personnel number
	FZ.PVORNAME	First name
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	FZ.KAT	Absence category
	FZ.DAT:APPLY	Date of request
	FZ.ZEI:APPLY	Period of request
	PNR.TAETIGKEIT	Person's subgroup
	PNR.BER	Area
FZ.APPLICATION_ALLOWED	FZ.BEARB	Editor
FZ.APPLICATION_REJECTED	FZ.NAME:BEARB	Editor name

Notification tab

How the message is sent can be configured in the *Notification* tab. In the example below, the notification is sent to the console (MOC) where the supervisor might be logged on, and in addition by e-mail.

If the e-mail notification type is active, an additional field is shown. One or more valid e-mail addresses, separated by a comma, can be entered here. When the e-mail is sent to the recipient of the escalation, a copy is sent to the CC addressee

If a message cannot be sent to the recipient of the escalation by e-mail, for instance if he/she does not have any e-mail address, no copy is sent to the CC addressee, either.




Messages can only be displayed on terminals of types CT-360, CT-370 and CT-380.

Employees without any e-mail address entered in the HR master data will not receive any notification by e-mail.

Supervisor and E-mail Address Configuration

Menu	Master data → Staff → HR master data
Transaction code	pers
Function authorization	pers


The person's supervisor is entered in the *Person* tab of the [HR master data](#). Absence times requested in the workflow are forwarded to this supervisor.

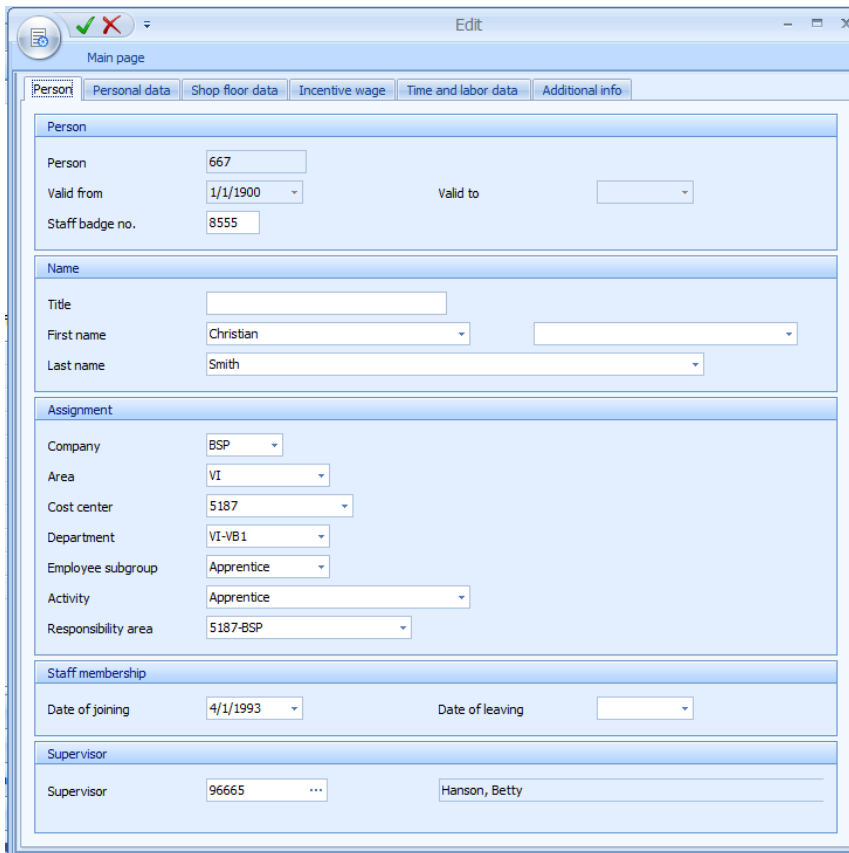

The screenshot shows a software window titled 'Edit' with a 'Main page' tab. The 'Person' tab is selected, displaying the following information:

Person	
Person	667
Valid from	1/1/1900
Staff badge no.	8555
Valid to	
Name	
Title	
First name	Christian
Last name	Smith
Assignment	
Company	BSP
Area	VI
Cost center	5187
Department	VI-VB1
Employee subgroup	Apprentice
Activity	Apprentice
Responsibility area	5187-BSP
Staff membership	
Date of joining	4/1/1993
Date of leaving	
Supervisor	
Supervisor	96665 ... Hanson, Betty

For employees and supervisors to be notified by e-mail, the e-mail address must be entered in the *Company e-mail* field in the *Personal data* tab.

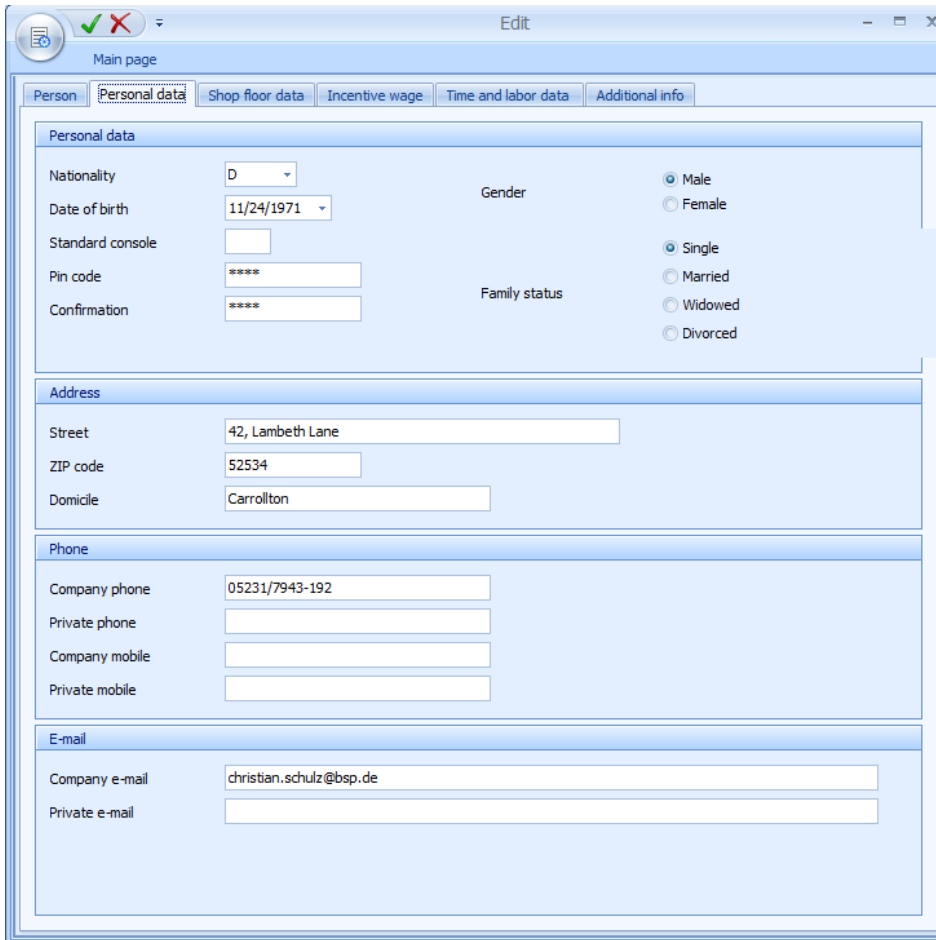

The screenshot shows a web application window titled 'Edit'. It has a 'Main page' tab and several sub-tabs: 'Person', 'Personal data', 'Shop floor data', 'Incentive wage', 'Time and labor data', and 'Additional info'. The 'Personal data' tab is active. It contains several sections: 'Personal data' with fields for Nationality (D), Date of birth (11/24/1971), Gender (Male), Standard console, Pin code (****), Confirmation (****), Family status (Single), Address (Street: 42, Lambeth Lane, ZIP code: 52534, Domicile: Carrollton), Phone (Company phone: 05231/7943-192), and E-mail (Company e-mail: christian.schulz@bsp.de).

Allocation of Supervisor to HYDRA User

Menu	System administration → User administration → User
Transaction code	user
Function authorization	user

When logging on to MOC, the absence requests are shown to the supervisor in the *Messages* window. To this end, it is necessary that a link is established between the personnel number of the supervisor and his/her [user](#), under which he/she logs on to the system.

Company, Person

Assignment of the user to a person in the HR master data.

Control of Absence Times to be Displayed

Menu	Master data → Labor time → Control of absence times
Transaction code	abse
Function authorization	abse

The absence times to be available for selection in the absence workflow are determined in the [control of absence times](#) window.

Absence time may be requested.

This button determines whether this absence time is available for selection when requesting an absence time via the web interface.

Request needs to be approved

This parameter is used to determine whether the absence time requested via the absence workflow has to be approved by the supervisor or whether it is automatically considered as approved.

Processing of Absence Times

Menu	Information management → Postings → Current escalations
Transaction code	escov
Function authorization	escov

The absence times requested by the employee are shown in the [current escalations](#) window, where they can be processed by the supervisor.

The screenshot displays the 'Current escalations' window. The top bar includes 'Main page' and 'Profile' tabs. Below this is a toolbar with icons for 'Request data', 'Cancel', 'Print preview', 'Print all', 'Read event', 'Forward event', 'Finish event', 'Save', and 'Help' (operation, application, detail application). The 'Selection' section has radio buttons for 'Current' (selected) and 'History', a 'Status' dropdown set to 'In process, Open', and a 'Show messages of all users' checkbox. The main area is divided into two panes. The left pane, titled 'Current escalations', contains a table with columns 'Event', 'Status', 'Priority', 'Point in time', and 'Description'. The right pane, also titled 'Current escalations', shows details for the selected event 'FZ.APPLICATION_FILED', including 'Description', 'Priority', 'Subject', 'Text', and sections for 'Triggered', 'Last processing', and 'Finished'.

Event	Status	Priority	Point in time	Description
Open		1	1/23/2013 1:53...	Absence applied
Open		2	5/10/2012 5:51...	Terminal offline
Open		2	5/10/2012 3:41...	Terminal offline
Open		2	2/2/2012 8:00:...	Terminal offline
Open		2	12/17/2010 2:4...	Terminal offline
Open		2	3/3/2010 3:34:...	Terminal offline
Open		2	3/3/2010 3:33:...	Terminal offline
Open		1	12/22/2009 9:2...	Keine Verbindung zu SAP möglich
Open		2	3/20/2009 10:5...	Terminal offline
Open		2	3/20/2009 10:5...	Terminal offline
Open		1	3/19/2009 5:56...	Machine malfunction occurred
Open		1	3/19/2009 11:5...	Keine Verbindung zu SAP möglich
Open		1	3/18/2009 5:57...	Machine malfunction occurred
Open		2	3/16/2009 11:3...	Terminal offline
Open		2	3/13/2009 5:00...	Terminal offline
Open		2	3/13/2009 5:00...	Terminal offline
Open		2	3/13/2009 5:00...	Terminal offline
Open		1	3/13/2009 4:52...	Application for absence refused

Current escalations details:


Event: FZ.APPLICATION_FILED
Description: Absence applied
Priority: 1
Subject: Absence applied
Text: Person 96665 Holzinger, Beate hat vom 24.01.2013 bis 25.01.2013 Urlaub t

Triggered
Point in time: 1/23/2013 1:53:47 PM to
Modified by: SYSTEM

Last processing
Modified on:
Modified by:

Finished
Point in time:
Modified by:

The supervisor can read the message and subsequently approve or reject the request.

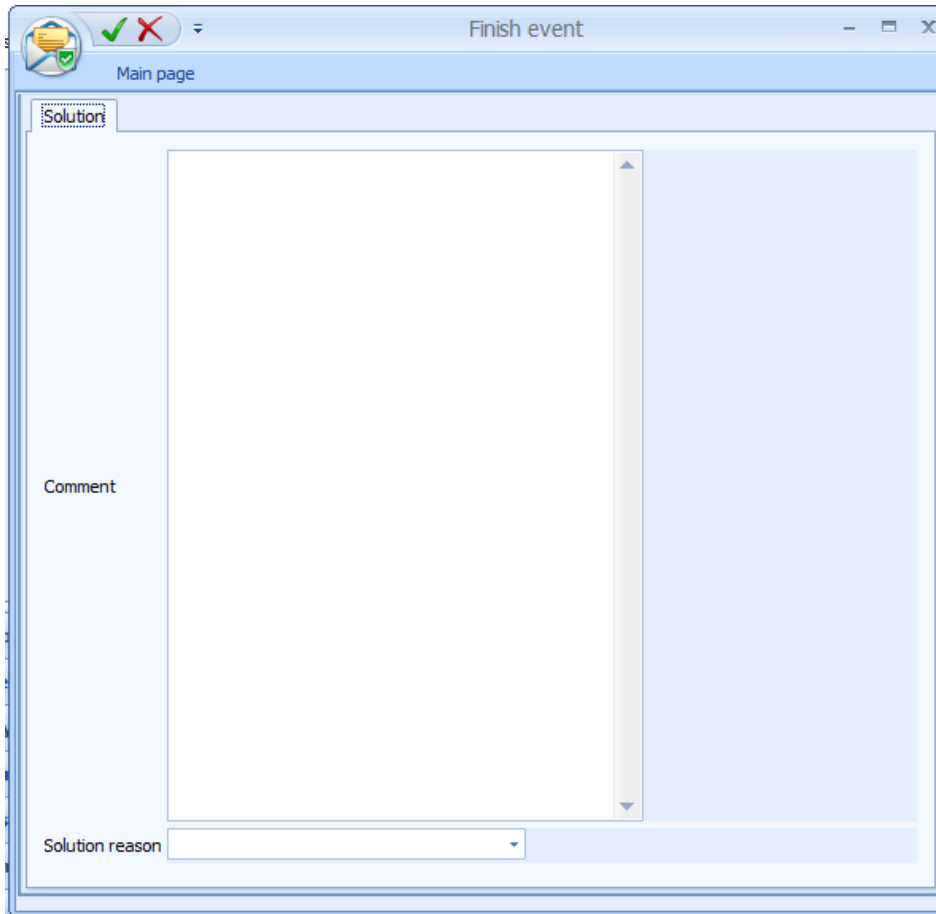

The approval and/or rejection of an absence request is selected in the "Solution reason" field. The clear text is automatically transferred to the input field at the top. Here it is possible to enter reasons for the decision made.


3 Request Absences at the Terminal

Overview

Employees can use this function on PZE or BDE terminals to request, modify or delete applications for absences. At the same time, the employee receives an overview of requests already submitted and their status.

Terminal operation

Absence planning is initiated on the PZE terminal by selecting the relevant buttons and by reading in the staff badge number. The following dialog opens and future requested, approved or planned absences are displayed.

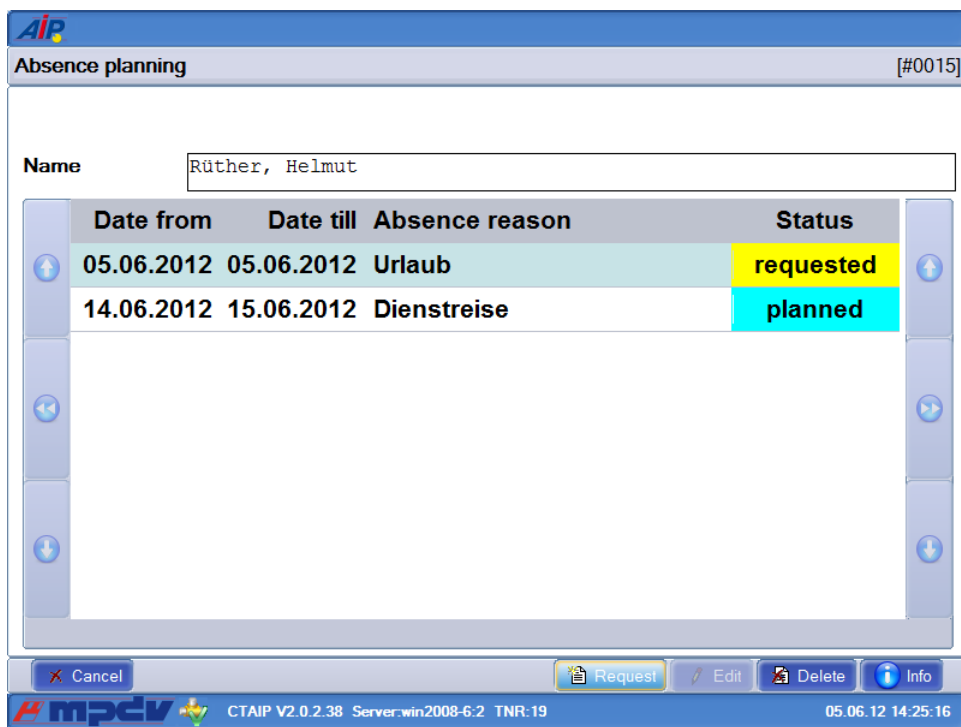

Date from	Date till	Absence reason	Status
05.06.2012	05.06.2012	Urlaub	requested
14.06.2012	15.06.2012	Dienstreise	planned

On the BDE terminal, the dialog opens immediately after pressing the proper button. Absences are not displayed, however, until after the staff badge number has been read in. The staff badge number cannot be entered from the keyboard, but for security reasons, it must be read in by a staff badge or barcode reader.

Please note:

This function can only be used when the terminal is online. If offline, the command is aborted and an error message is displayed accordingly.

The list only shows future planned absences and only the reasons for absences that can also be requested or scheduled on the terminal. The following status options are displayed:

Status	Description
Requested	The absence was requested, but has not yet been authorized or refused.
Authorized	The absence was requested and authorized by the supervisor
Planned	No request is required for the absence and was planned either on the terminal or on the HYDRA client.


Function key assignment

Cancellation

This key closes the dialog.

Request


The following dialog (P_FZP_INS) opens to request an absence:

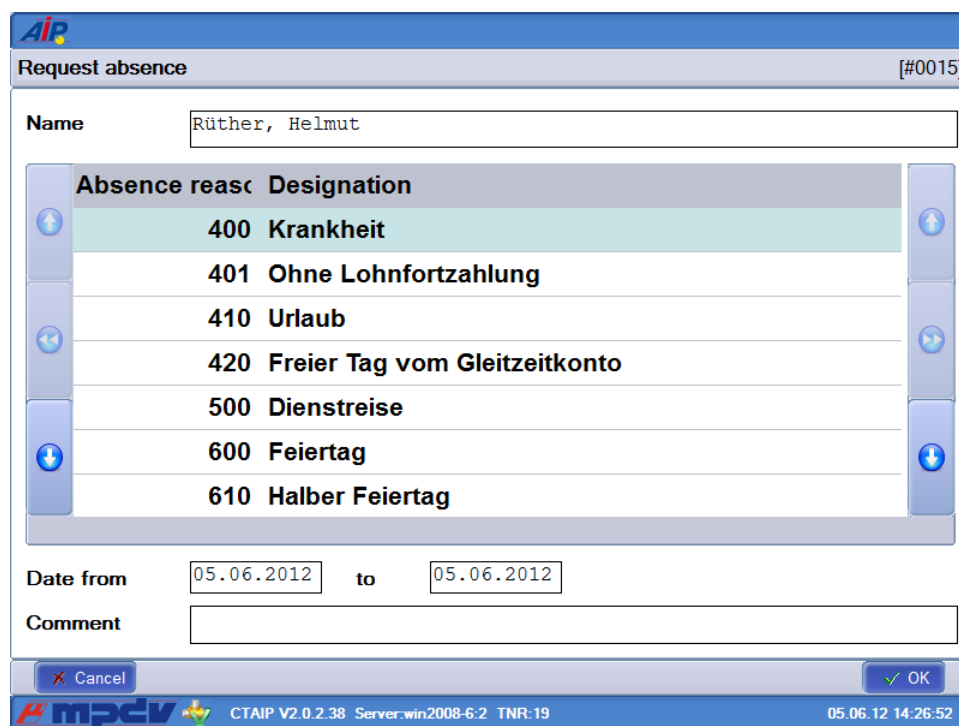

After selecting a reason for absence and entering the time period, the absence can be requested or planned using the OK key. You have the option to enter a comment.


Edit

The employee can modify a planned absence in the *Edit absence* dialog (P_FZP_UPD). The function is only available for absences for which no request is required:

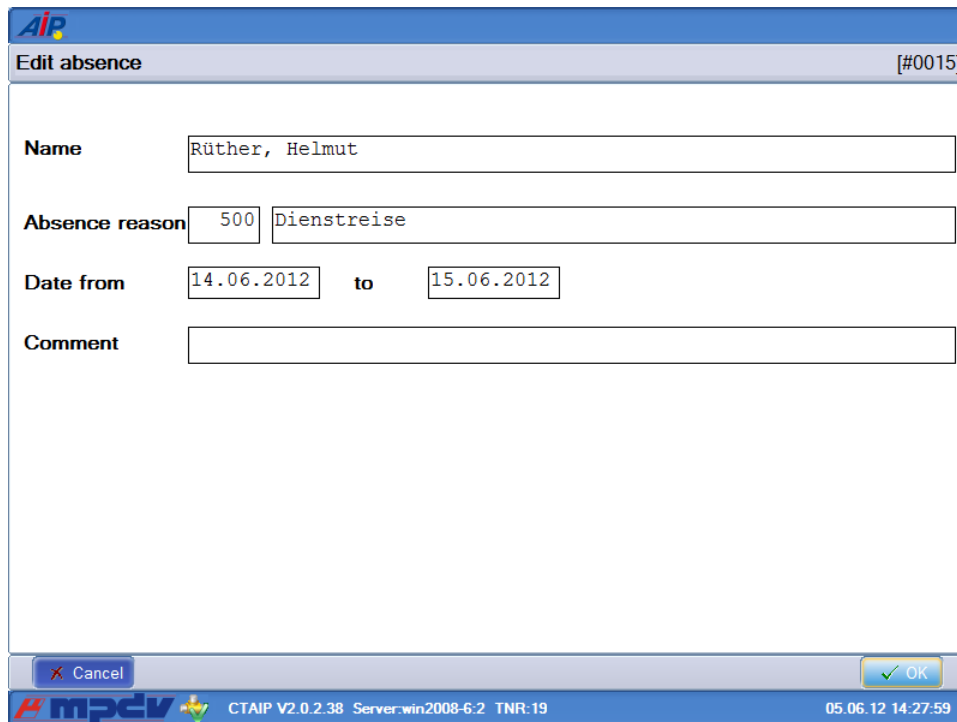


Delete

The employee can delete an absence that was requested or planned with the *Delete absence* dialog (P_FZP_DEL). If this is a requested absence, the supervisor is informed that the request was withdrawn:

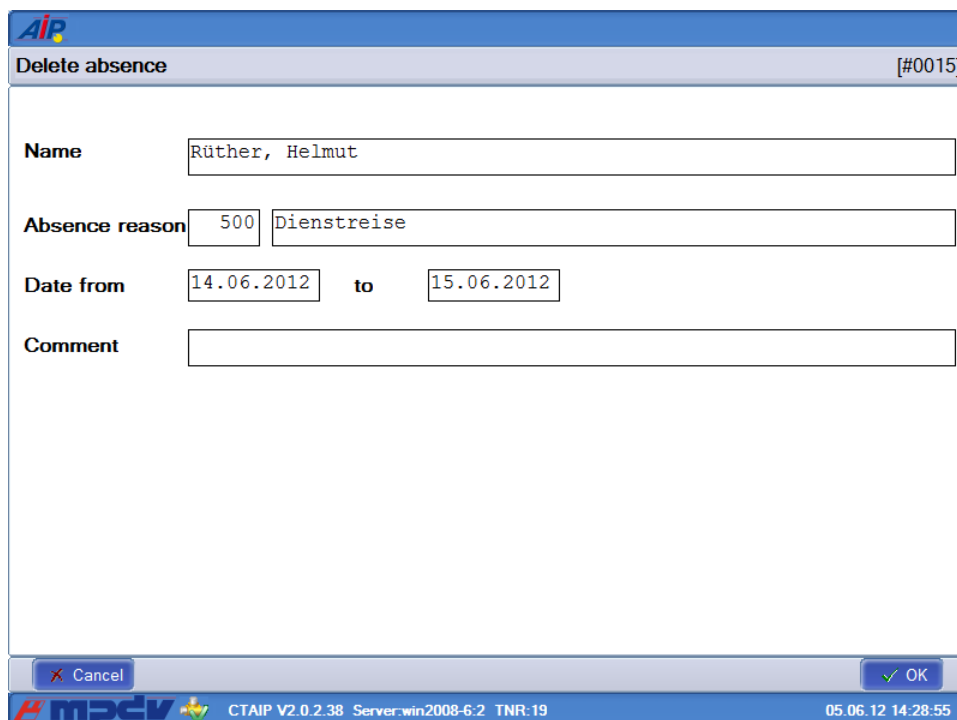

Info

The employee can display his/her current account balances by pressing this key. The display is the same as the one generated by pressing the info key on the PZE terminal.

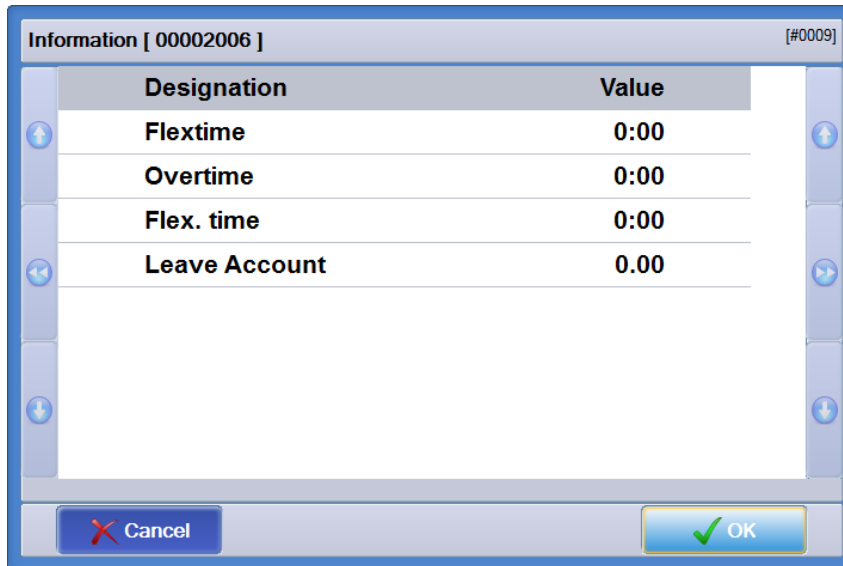

The screenshot shows a dialog box titled 'Information [00002006]' with a reference number '[#0009]' in the top right corner. The dialog contains a table with two columns: 'Designation' and 'Value'. The table lists four items: 'Flextime' with a value of '0:00', 'Overtime' with a value of '0:00', 'Flex. time' with a value of '0:00', and 'Leave Account' with a value of '0.00'. The dialog has a 'Cancel' button with a red 'X' icon and an 'OK' button with a green checkmark icon at the bottom.

Designation	Value
Flextime	0:00
Overtime	0:00
Flex. time	0:00
Leave Account	0.00

Terminal configuration

On PZE terminals, the functions described can be activated with an absence reason key. In addition, "_FZP" must be entered in one of the fields *Absence reason 1* through *Absence reason 4* in the *HR Functions* tab in the terminal configuration. The labeling of the corresponding key on the PZE terminal can be defined in one of the fields *Absence reason text 1* through *Absence reason text 4*.

On the BDE terminal, the functions can be activated via the dynamic dialog P_FZP. The INI-file ctaipbut.ini is used to accomplish this by entering the following in any random section:

X=P_FZP,R,key labeling (X= button index)