

# Manual

## Workflow for Absence Approval PZW-WFG 8.2

Version 1.0.15126

Last changed on: 19.06.2020

## Copyright

©Copyright 2020 All rights reserved.

SAP® and R/3® are registered trademarks of SAP AG.

WINDOWS® is a registered trademark of Microsoft Corporation.

MPDV® and HYDRA® are registered trademarks of MPDV Mikrolab GmbH.

ORACLE® is a registered trademark of ORACLE Corporation, California, USA.

Copying and distribution of this documentation or any part thereof, for any purpose or in any form, is prohibited without prior written permission from MPDV Mikrolab GmbH.

The information contained in this documentation is subject to change without prior notices.

# Contents

|     |                                                     |    |
|-----|-----------------------------------------------------|----|
| 1   | Workflow for Absence Approval - Overview.....       | 4  |
| 2   | Configuration Absence Time Workflow.....            | 5  |
| 3   | Requesting Absences on the Terminal.....            | 16 |
| 4   | Approval and Rejection of Absence Requests.....     | 21 |
| 4.1 | Approval and rejection in absence planning .....    | 21 |
| 4.2 | Approval and rejection in personnel scheduling..... | 21 |

# 1 Workflow for Absence Approval - Overview

|  |  |  |
|--|--|--|
|  |  |  |
|--|--|--|

## Purpose

*Application Service* for mapping a user-friendly and transparent absence approval workflow.

## Implementation Considerations

You use the function package if:

- you wish to provide employees with the possibility to request absence times on PZE or BDE terminals (only available at specific terminal types).
- the relevant supervisors are to be notified if an absence was requested so that they may approve or reject the request.
- employees are to be informed, for example, when their request is approved or rejected by means of a message on the labor time recording terminal.

## Integration

Requested absences are displayed in italics in [personnel scheduling](#) and can thus be considered in the planning of available employees.

## Features

- Absence workflow.
  - Terminal dialog for employees to request absence times (e.g. leave, flextime...) and display their requested and approved absences at the PZE or BDE terminal.
  - Notification of the supervisor with regard to requested absence times (e.g. by e-mail).
  - Function for approving or rejecting requested absences.
  - Withdrawal by the employee of absence requests not yet processed.
  - Notification of the requesting party, e.g. at the PZE terminal or by e-mail, as to whether the absence was approved or rejected.

## 2 Configuration Absence Time Workflow

### Overview


The absence workflow enables employees to request absences via the Internet and/or Intranet. After filing a request, the supervisor will be informed and can then approve or reject the request. Subsequently, the employee will receive a notification via e-mail or on the terminal as to whether or not the absence request was approved.

The settings for the absence workflow are configured at various different places in MOC:

### Configuration – Basic Settings

|                        |                                                          |
|------------------------|----------------------------------------------------------|
| Menu                   | System administration → System settings → Basic settings |
| Transaction code       | setup                                                    |
| Function authorization | setup                                                    |

In the ESK tab of the [Basic settings](#) screen, the e-mail server must be entered so that notifications for absence times and their approval and/or rejection can be forwarded to the employees by e-mail:

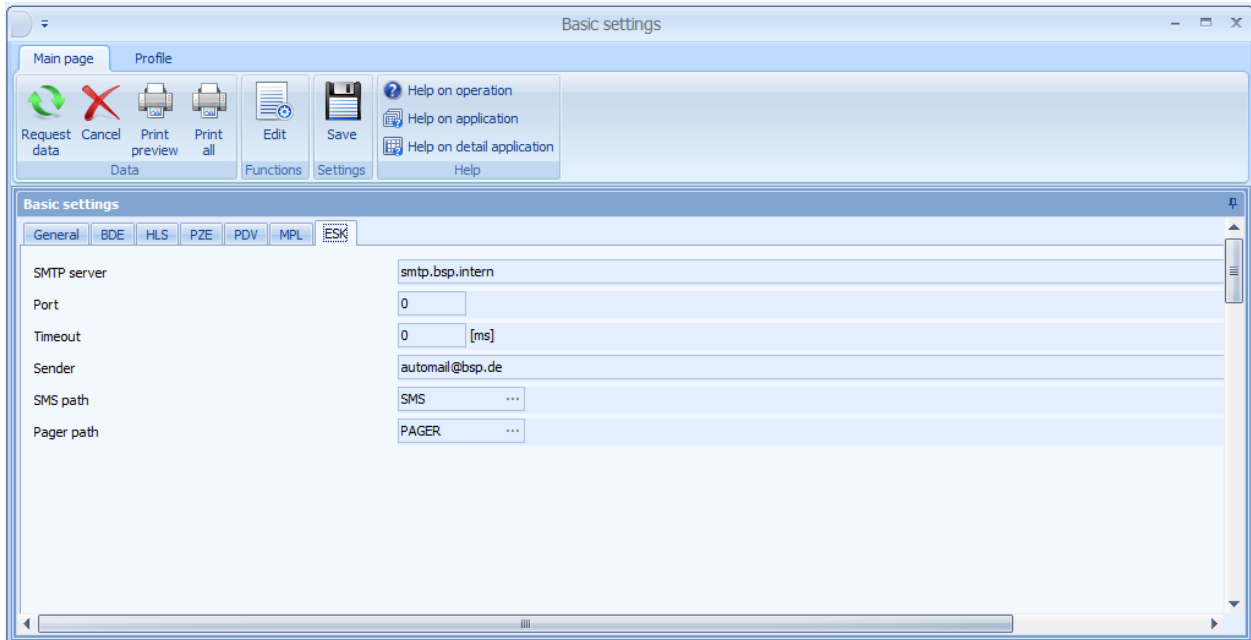

The screenshot shows the 'Basic settings' window with the 'ESK' tab selected. The configuration fields are as follows:

| Field       | Value           |
|-------------|-----------------|
| SMTP server | smtp.bsp.intern |
| Port        | 0               |
| Timeout     | 0 [ms]          |
| Sender      | automail@bsp.de |
| SMS path    | SMS ...         |
| Pager path  | PAGER ...       |

### Field descriptions

The IP address of the SMTP server and the sender that is entered as the sender in the mails to be sent are particularly important here.

## SMTP server

Enter the IP address or name of the local SMTP server in the *SMTP server* field in order to send e-mails.

## Sender

Enter a central e-mail account. E-mails sent via HYDRA Escalation Management will then have this central account as sender.

## Event Configuration in Escalation Management

|                        |                                                                |
|------------------------|----------------------------------------------------------------|
| Menu                   | Master data → Escalation management → Escalation configuration |
| Transaction code       | esccfg                                                         |
| Function authorization | esccfg                                                         |

Enter the events for requesting, approving and rejecting absences here [Escalation configuration](#):

| Event | Reference | Event         | Designation       | Recipient t... | Recipient      | Priority | Color        | Active                              | ESK mode |
|-------|-----------|---------------|-------------------|----------------|----------------|----------|--------------|-------------------------------------|----------|
| >     | 1         | DB.FILL_1E... | Fill level of ... | Function       | HYDRA-Ad...    | 1        | Light red    | <input checked="" type="checkbox"/> | F        |
|       | 2         | FILESYS.FI... | Fullstandsp...    | Function       | HYDRA-Ad...    | 1        | Light red    | <input checked="" type="checkbox"/> | F        |
|       | 3         | ESK.NO_PE...  | Keine Perso...    | Function       | Dispatcher     | 1        | Pink         | <input checked="" type="checkbox"/> | F        |
|       | 4         | MST.MALFU...  | Machine ma...     | Function       | Instandsetz... | 1        | Yellow       | <input checked="" type="checkbox"/> | F        |
|       | 5         | SAP.INBOU...  | Keine Verbi...    | Person         |                | 1        | Turquoise    | <input checked="" type="checkbox"/> | F        |
|       | 6         | TNR.OFFLINE   | Terminal of...    | Function       | HYDRA-Ad...    | 2        | Light yellow | <input checked="" type="checkbox"/> | F        |
|       | 7         | TNR.OFFLINE   | Terminal of...    | Function       | HYDRA-Ad...    | 1        | Light red    | <input checked="" type="checkbox"/> | F        |
|       | 8         | SAP.INBOU...  | min 1 Daten...    | Function       | HYDRA-Ad...    | 9        | Light blue   | <input checked="" type="checkbox"/> | F        |
|       | 9         | SAP.INBOU...  | min 1 Daten...    | Function       | HYDRA-Ad...    | 9        | Light blue   | <input checked="" type="checkbox"/> | F        |
|       | 10        | SAP_PP_AV...  | Kein Updat...     | Function       | HYDRA-Ad...    | 5        | Green        | <input checked="" type="checkbox"/> | F        |
|       | 11        | SAP.OUTB...   | Keine Verbi...    | Function       | HYDRA-Ad...    | 1        | Light red    | <input checked="" type="checkbox"/> | F        |
|       | 12        | FZ.APPLIC...  | Absence ap...     | Function       | HYDRA-Ad...    | 1        | Green        | <input checked="" type="checkbox"/> | F        |
|       | 13        | FZ.APPLIC...  | Application ...   | Function       | HYDRA-Ad...    | 1        | Pink         | <input checked="" type="checkbox"/> | F        |
|       | 14        | FZ.APPLIC...  | Application ...   | Function       | HYDRA-Ad...    | 1        | Turquoise    | <input checked="" type="checkbox"/> | F        |
|       | 15        | ZNR.OPEN...   | Entrance o...     | Function       | HYDRA-Ad...    | 1        | Light red    | <input checked="" type="checkbox"/> | F        |
|       | 16        | ZNR.OPEN...   | Entrance o...     | Function       | HYDRA-Ad...    | 1        | Light red    | <input checked="" type="checkbox"/> | F        |

## Field descriptions

### Event


FZ.APPLICATION\_FILED -> triggered when an absence is requested.

FZ.APPLICATION\_ALLOWED -> triggered after approval of an absence request.

FZ.APPLICATION\_REJECTED -> triggered after rejection of an absence request.


FZ.APPLICATION\_WITHDRAWN -> triggered after withdrawal of an absence request by an employee.

### Event tab for FZ.APPLICATION\_FILED

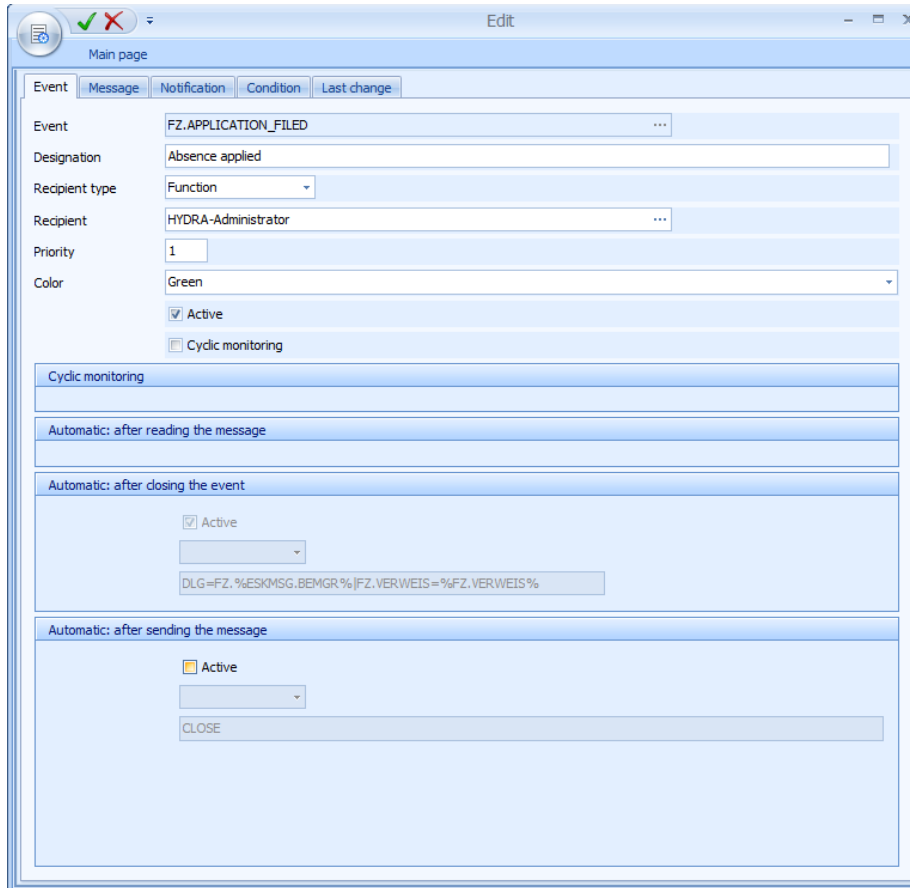


The screenshot shows the 'Event' tab for the event 'FZ.APPLICATION\_FILED'. The 'Designation' is 'Absence applied'. The 'Recipient type' is 'Function' and the 'Recipient' is 'HYDRA-Administrator'. The 'Priority' is '1' and the 'Color' is 'Green'. The 'Active' checkbox is checked, and 'Cyclic monitoring' is unchecked. The 'Automatic: after reading the message' section is empty. The 'Automatic: after closing the event' section has the 'Active' checkbox checked and a text field containing 'DLG=FZ. %ESKMSG.BEMGR%|FZ.VERWEIS=%FZ.VERWEIS%'. The 'Automatic: after sending the message' section has the 'Active' checkbox unchecked and a text field containing 'CLOSE'.

### Event tab for FZ.APPLICATION\_ALLOWED

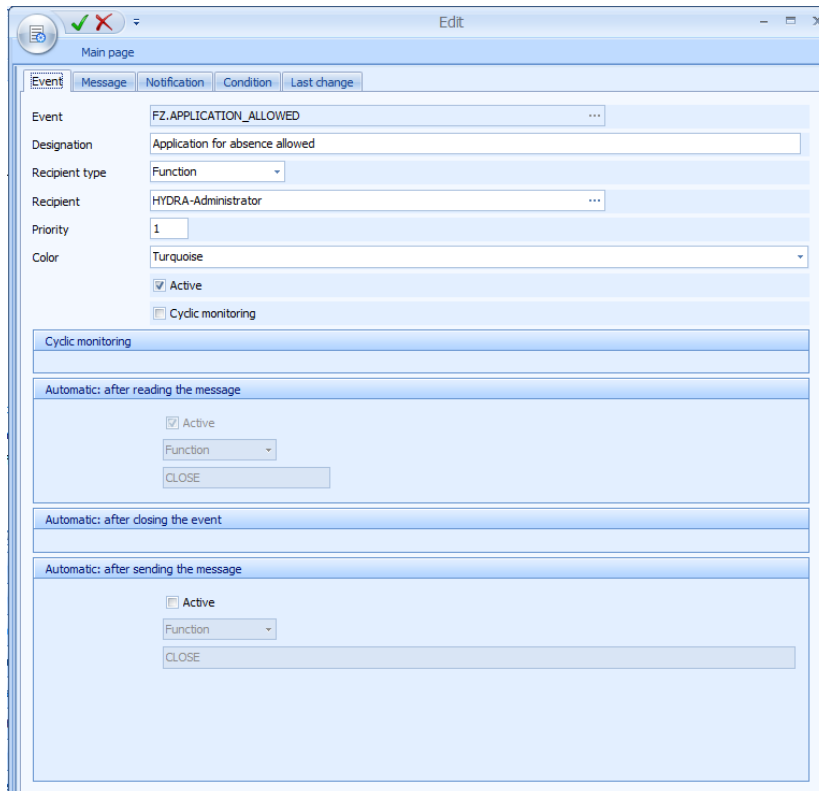

The screenshot shows the 'Event' tab for the event 'FZ.APPLICATION\_ALLOWED'. The 'Designation' is 'Application for absence allowed'. The 'Recipient type' is 'Function' and the 'Recipient' is 'HYDRA-Administrator'. The 'Priority' is '1' and the 'Color' is 'Turquoise'. The 'Active' checkbox is checked, and 'Cyclic monitoring' is unchecked. The 'Automatic: after reading the message' section has the 'Active' checkbox checked and a text field containing 'CLOSE'. The 'Automatic: after closing the event' section is empty. The 'Automatic: after sending the message' section has the 'Active' checkbox unchecked and a text field containing 'CLOSE'.

## Event tab for FZ.APPLICATION\_REJECTED

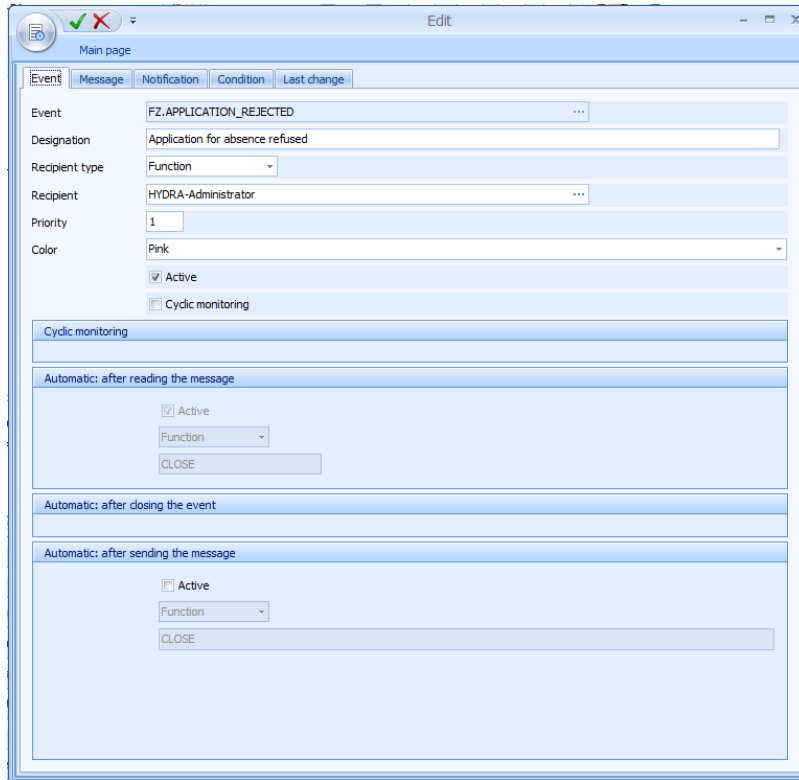


## Event tab for FZ.APPLICATION\_WITHDRAWN

Entries in the *Message* and *Notification* tabs are made at the same time as the approval of an absence request.

## Message tab

You may define the subject and text of the message in the Message tab

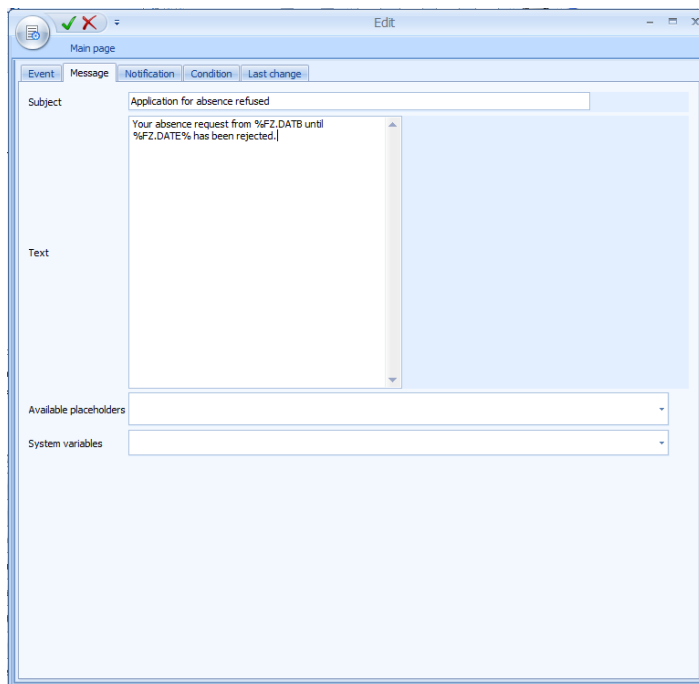



Examples:

Person %FZ.PNR% %FZ.NAME:PNR% has requested %FZ.BEZL:ENTLTMOD% from %FZ.DATB date dd.mm.yyyy% through %FZ.DATE date dd.mm.yyyy%.

Your absence request for the period from %FZ.DATB date dd.mm.yyyy% through %FZ.DATE date dd.mm.yyyy% absence %FZ.ENTLTMOD% %FZ.BEZL:ENTLTMOD% was approved.

Your absence request for the period from %FZ.DATB date dd.mm.yyyy% through %FZ.DATE date dd.mm.yyyy% absence %FZ.ENTLTMOD% %FZ.BEZL:ENTLTMOD% was rejected.


The following placeholders are available for creating the message:

| Event                                                                                                 | IDs              | Description                       |
|-------------------------------------------------------------------------------------------------------|------------------|-----------------------------------|
| FZ.APPLICATION_FILED<br>FZ.APPLICATION_ALLOWED<br>FZ.APPLICATION_REJECTED<br>FZ.APPLICATION_WITHDRAWN | FZ.DATB          | Start date                        |
|                                                                                                       | FZ.BEZL          | Comment                           |
|                                                                                                       | FZ.BEZL:ENTLTMOD | Absence designation               |
|                                                                                                       | FZ.VERWEIS       | Unique record number              |
|                                                                                                       | FZ.DATE          | End date                          |
|                                                                                                       | FZ.ENTLTMOD      | Absence payment                   |
|                                                                                                       | FZ.FIR           | Company from the absence planning |
|                                                                                                       | FZ.BEZX:ENTLTMOD | Absence abbreviation              |
|                                                                                                       | FZ.PNR           | Personnel number                  |
|                                                                                                       | FZ.NAME:PNR      | Person's name                     |
|                                                                                                       | FZ.PNAME         | Last name                         |
|                                                                                                       | FZ.PVORNAME      | First name                        |
|                                                                                                       | PNR.BESCHVERH    | Employment relationship           |
|                                                                                                       | PNR.TEL:FIR      | Company phone                     |
|                                                                                                       | PNR.EMAIL:FIR    | E-mail (business)                 |
|                                                                                                       | PNR.BER          | Area                              |
|                                                                                                       | PNR.KST          | Cost center                       |
|                                                                                                       | PNR.ABT          | Department                        |
|                                                                                                       | PNR.PKREIS       | Employee subgroup                 |
|                                                                                                       | PNR.TAETIGKEIT   | The person's activity             |
|                                                                                                       | PNR.PNR:VGS      | The supervisor's personnel number |
|                                                                                                       | FZ.KAT           | Absence category                  |
|                                                                                                       | FZ.DAT:APPLY     | Date of request                   |
|                                                                                                       | FZ.ZEI:APPLY     | Period of request                 |
| FZ.APPLICATION_ALLOWED<br>FZ.APPLICATION_REJECTED                                                     | FZ.BEARB         | Modified by                       |
|                                                                                                       | FZ.NAME:BEARB    | Editor name                       |

| Event                   | IDs        | Description                                                                                                      |
|-------------------------|------------|------------------------------------------------------------------------------------------------------------------|
| FZ.APPLICATION_REJECTED | FZ.ESK:BEM | Reject the reason<br><br><i>This variable is only available on the HYDRA systems with Service Pack 9 (2016).</i> |

### Notification tab

You can configure how the message is sent in the *Notification* tab. You can see in the example below, that the notification is sent to the console (MOC) where the supervisor is logged on, and also by e-mail. If the e-mail notification type is active, an additional field is shown. You can enter one or more valid e-mail addresses, separated by a comma, in the *Send e-mail by CC to* field. When the e-mail is sent to the recipient of the escalation, a copy goes to the CC addressee(s):

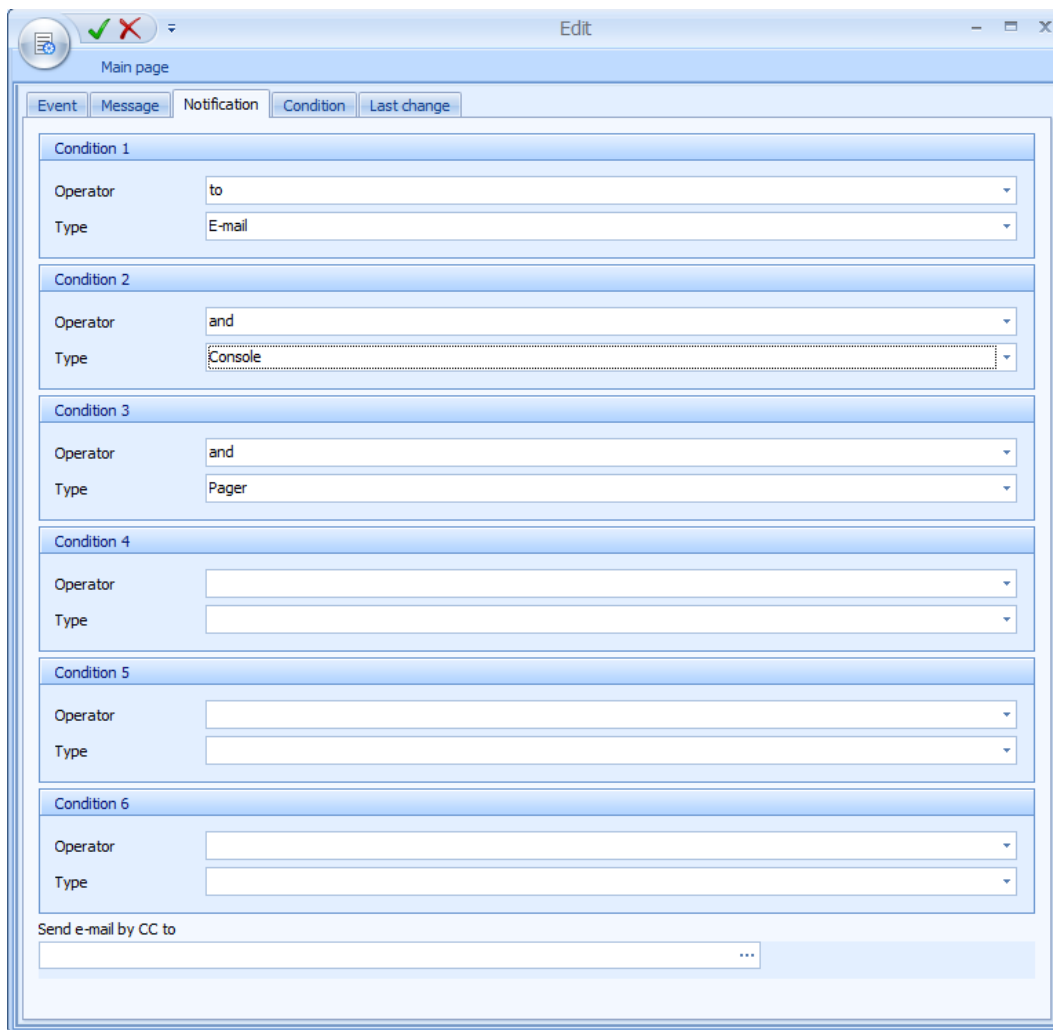



If a message cannot be sent to the recipient of the escalation by e-mail, no copy is sent to the CC addressee, either. This could be the case if he/she does not have any e-mail address. No e-mail notification is required for employees for whom no e-mail address is entered in the personnel master record.



This notification type is configured in a way that the message is displayed only once on the PZE terminal and is removed after a maximum of 4 weeks. However, the message can be displayed several times during the period of the cyclic loading of authorizations. The message is displayed with the following actions on the PZE terminal: In, out, break, info, and message and absence reason.

Messages can only be displayed on terminals of the type CT-36x, CT-37x and CT-38x.


## Data retention of escalations

By default, escalations are stored for 30 days. Usually, this duration is to be extended for absence requests, e.g. in cases where the absence only starts half a year later.

## Supervisor and E-mail Address Configuration

|                        |                                      |
|------------------------|--------------------------------------|
| Menu                   | Master data → Staff → HR master data |
| Transaction code       | Pers                                 |
| Function authorization | Pers                                 |


The person's supervisor is entered in the *Person* tab of the [HR master data](#). Absence times requested in the workflow are forwarded to this supervisor.

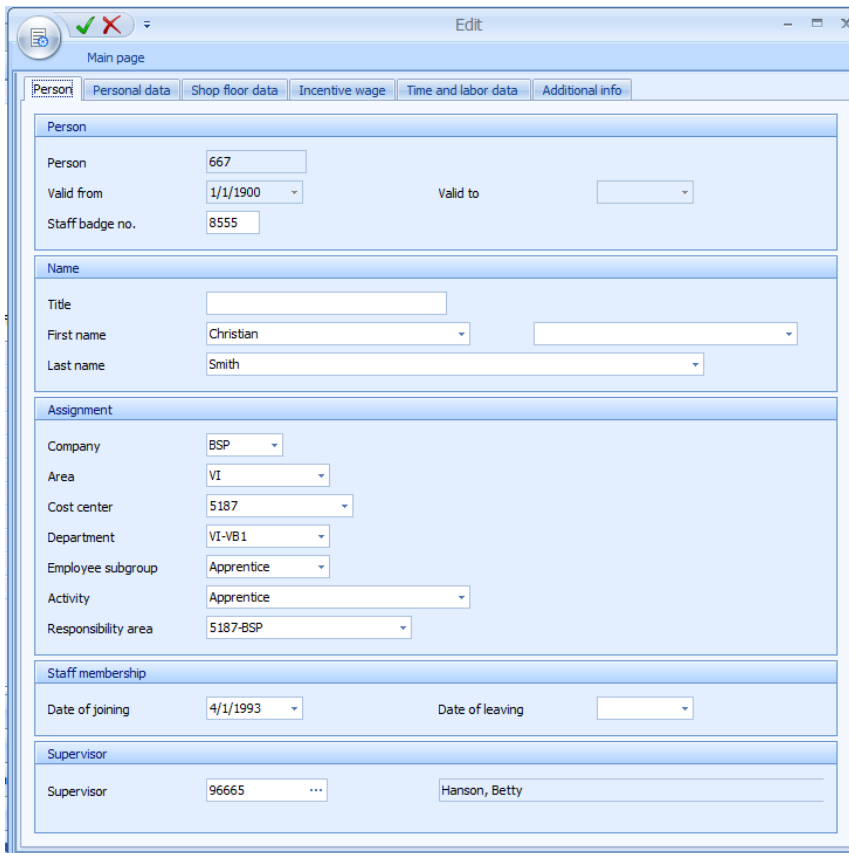

The screenshot shows a software window titled 'Edit' with a 'Main page' tab. The 'Person' tab is selected, displaying the following information:

- Person:** Person (667), Valid from (1/1/1900), Valid to ( ), Staff badge no. (8555)
- Name:** Title ( ), First name (Christian), Last name (Smith)
- Assignment:** Company (BSP), Area (VI), Cost center (5187), Department (VI-VB1), Employee subgroup (Apprentice), Activity (Apprentice), Responsibility area (5187-BSP)
- Staff membership:** Date of joining (4/1/1993), Date of leaving ( )
- Supervisor:** Supervisor (96665), Hanson, Betty

Enter the e-mail address in the E-mail Company field in the *Personal Data* tab for employees and supervisors to be notified by e-mail.

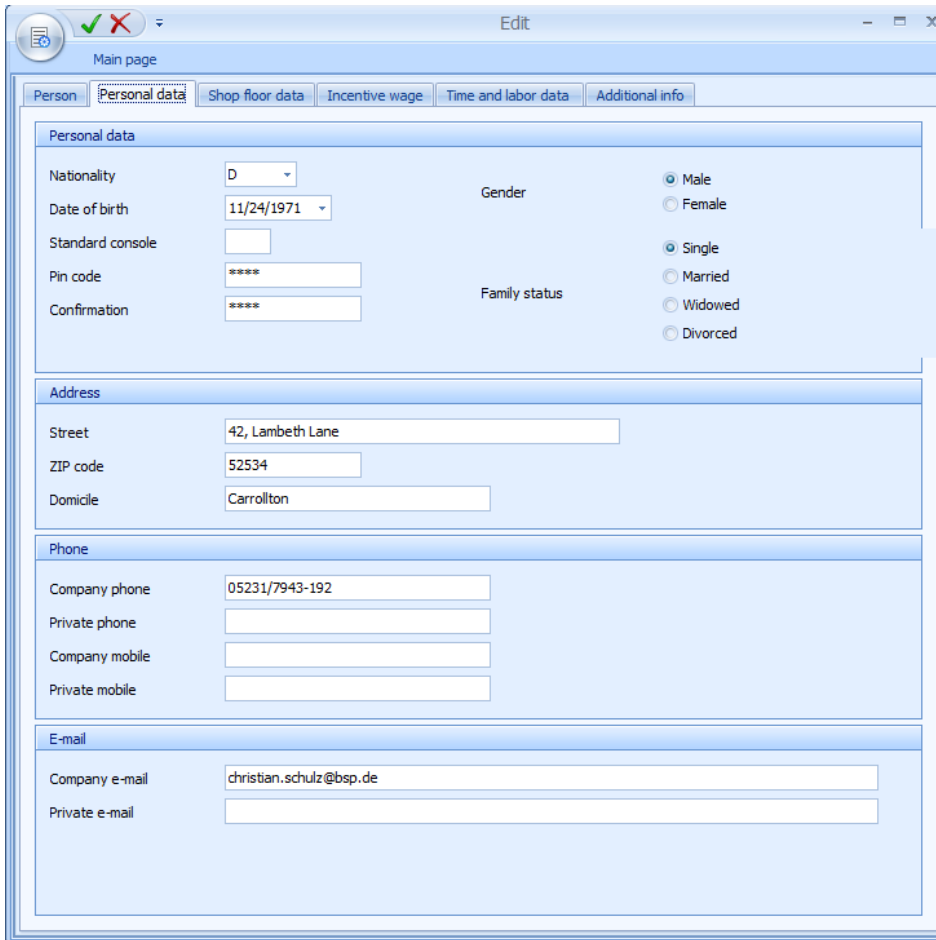

## Allocation of Supervisor to HYDRA User

|                        |                                                     |
|------------------------|-----------------------------------------------------|
| Menu                   | System administration → User administration → Users |
| Transaction code       | user                                                |
| Function authorization | user                                                |

When the supervisor logs on to the HYDRA MOC, the system displays the requests for absences in the *Current Escalations* window. For this to work, it is necessary to link the personnel number of the supervisor and the [User](#) number he/she uses to log on.

### Company, Person

Assignment of the user to a person in the HR master data.

### Control of Absence Times to be displayed

|                        |                                                     |
|------------------------|-----------------------------------------------------|
| Menu                   | Master data → Labor time → Control of absence times |
| Transaction code       | abse                                                |
| Function authorization | abse                                                |

The absence times you can select in the *Absence workflow* are specified in the [Control of absences](#) window.

| Absence payment        | Day type | Designation | Abbreviation | Full-day absence | Partly absent | Priority |
|------------------------|----------|-------------|--------------|------------------|---------------|----------|
| 400 Illness            |          |             | Ill          |                  |               | 60       |
| 420 School (full day)  |          |             | Sch          |                  |               | 30       |
| 450 Leave              |          |             | Lea          |                  |               | 50       |
| 451 Half day leave     |          |             | HLD          |                  |               | 50       |
| 455 Special Leave      |          |             | FCI          |                  |               | 55       |
| 480 Short-time work    |          |             | STW          |                  |               | 25       |
| 600 Holiday            |          |             | PubH         |                  |               | 70       |
| 610 Half day (Publ.H.) |          |             | F12          |                  |               | 70       |
| 901 Flextime minus     |          |             | FLX          |                  |               | 40       |

**Control of absences - Settings**

**Options**

- ☐ Authorization required
- ☐ Generate complete absence despite attendance
- ☐ Partly absent
- Fill up target time to:  %
- ☒ Modification enabled
- ☒ Display as planned absent

**Compensation**

- ☒ Allocate actual time
- ☐ Allocate as undertime
- ☒ Allocate leave day
- ☐ Allocate half a leave day

**Absence workflow**

- ☒ Absence may be requested
- ☒ Request needs to be approved

**Continued pay**

Period of continued pay:

Subseq. payment:

**Upload to payroll accounting**

- ☒ Upload to payroll accounting

Absence reason:

Control indicator:

### Absence may be requested.

The button specifies whether you can select the absence time using the Web interface.

### Request needs to be approved

This parameter is used to specify whether the absence time requested via the absence workflow has to be approved by the supervisor or whether it is automatically approved.

### 3 Requesting Absences on the Terminal

#### Overview

Employees can use this function to request, change and delete absences on the PZE or BDE terminal. The terminal also provides an overview for the employee that displays the former requests and their request status.

#### Operation on the terminal

To start the absence planning on the PZE terminal, select the respective button and scan the badge. The following dialog opens and shows the requested, approved or planned absences.

| Date from  | Date till  | Absence reason | Status    |
|------------|------------|----------------|-----------|
| 05.06.2012 | 05.06.2012 | Urlaub         | requested |
| 14.06.2012 | 15.06.2012 | Dienstreise    | planned   |

On the BDE terminal, the dialog opens directly when you have pressed the respective button. To show the absences, you must first scan the badge. You cannot enter the staff badge number via keyboard. For security reasons, you must scan the badge via badge or bar code reader.

**Note:**

You can only use the function, if the terminal is online. If the terminal is offline, the request is canceled and an error message is output.



The list only shows planned absences of the future and the absence reasons that you can also request or plan on the terminal. The following statuses are shown:

| Status    | Description                                                                                        |
|-----------|----------------------------------------------------------------------------------------------------|
| requested | The absence has been requested, but has not yet been approved or refused.                          |
| approved  | The absence has been requested and has been approved by the superior.                              |
| planned   | The absence does not require approval and has been planned on the terminal or on the HYDRA client. |



The list does not show the rejected requests. This way, the employee is not reminded again and again that they actually wanted to be off at a different time and that this request has been refused. The information that an absence request has been refused is shown when the employee clocks in or out on the PZE terminal (AIP or ctwin).


## Function key assignment

### Cancel

Use this button to close the dialog.

### Request


To request an absence, the following dialog opens (P\_FZP\_INS):

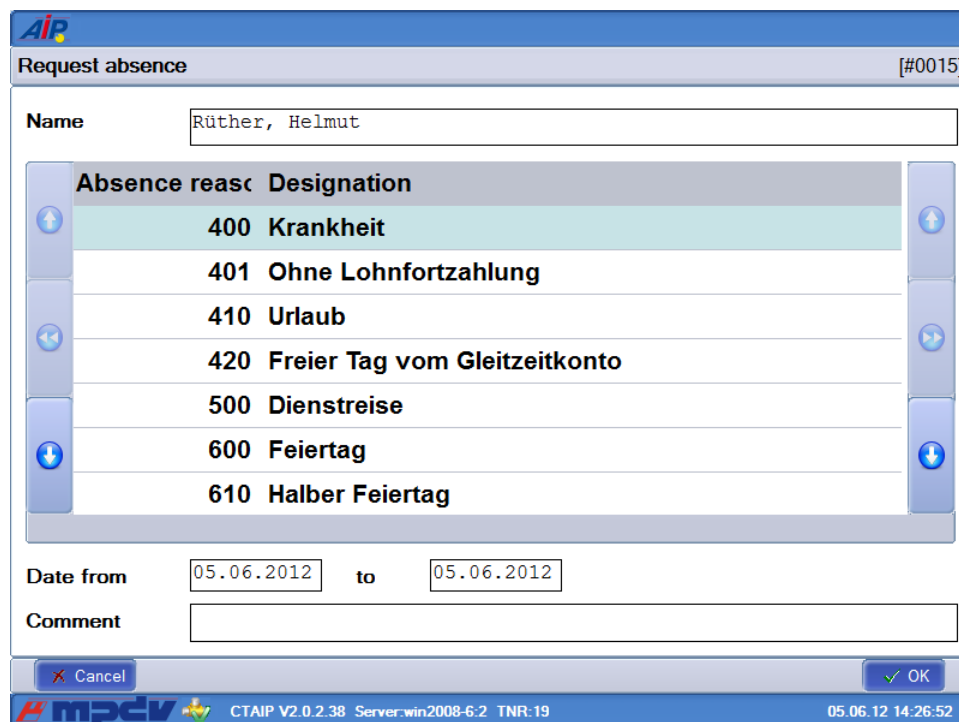

Select an absence reason and enter a period. Click the button **OK** to request or plan the absence. You can also enter a comment.


## Edit

The employee can use the dialog *Edit absence* (P\_FZP\_UPD) to change a planned absence. This function is only available for absences that need not be approved:

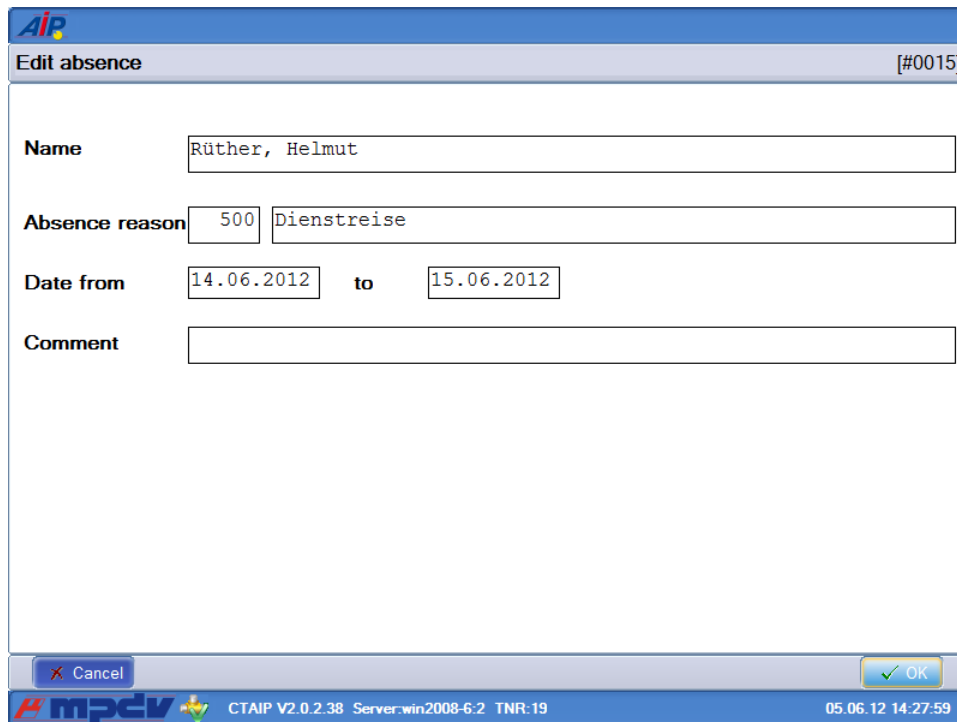

## Delete

The employee can use the dialog *Delete absence* (P\_FZP\_DEL) to delete a planned or requested absence. If an absence has been requested, the superior is informed that the request has been canceled:

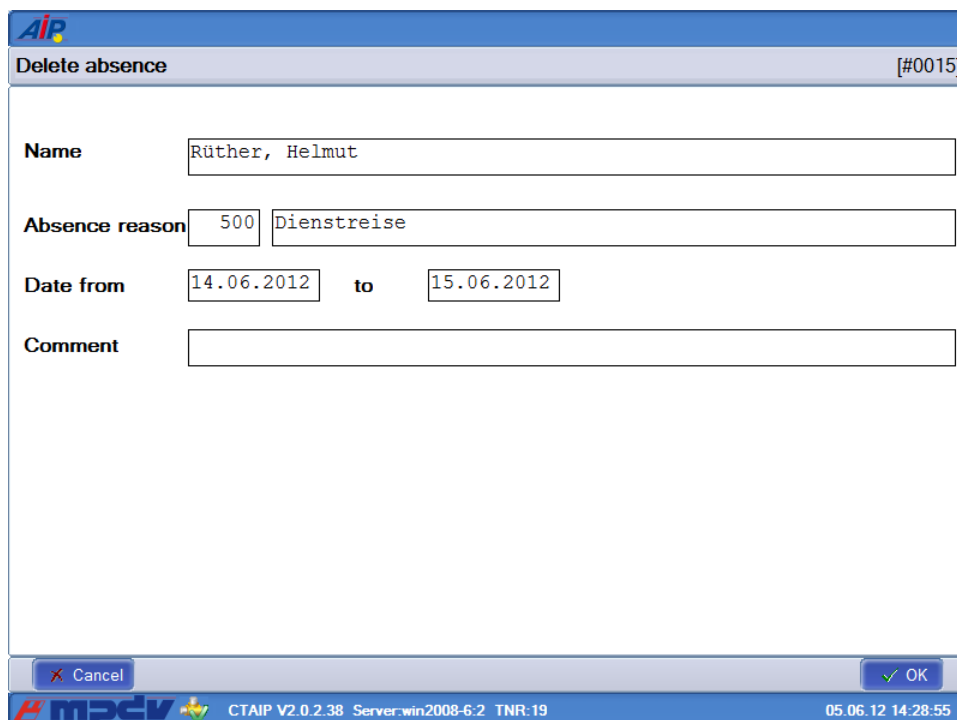



The button *Delete* is only available for the following absences:

- requested and not yet approved absences;
- absences that do not require approval;
- absences that have been entered on the terminal.

### Info

The employee can use this button to display the current account balances. The same display is shown if you press the *Info* button on the PZE terminal:

| Information [ 00002006 ] |               | [#0009] |   |
|--------------------------|---------------|---------|---|
|                          | Designation   | Value   |   |
| ↑                        | Flextime      | 0:00    | ↑ |
|                          | Overtime      | 0:00    |   |
|                          | Flex. time    | 0:00    |   |
| ←                        | Leave Account | 0.00    | → |
| ↓                        |               |         | ↓ |
| X Cancel                 |               | ✓ OK    |   |

## Terminal configuration

On the PZE terminal, the functionality described can be enabled using an *Absence reason* button. In the terminal configuration, tab *HR functions*, assign the entry "\_FZP" to one of the fields *Absence reason 1* to *Absence reason 4*. You can define the label text of the respective button on the PZE terminal in one of the fields *Absence reason text 1* to *Absence reason text 4*.

On the BDE terminal, you can enable the functionality using the dynamic dialog P\_FZP. The following entry is made in any section of the INI file ctaipbut.ini:

X=P\_FZP,R,button label (X = button index)

## Activating dynamic dialogs

To call the dialog on the terminal, the dynamic dialog *P\_FZP* must be enabled. The dialog is usually enabled during installation of the system. If this is not the case, you can enable the dialog in the application [Dynamic dialogs](#) using the button *Activate dialog*.



You can define dynamic dialogs for terminals or terminal groups. This option is mainly used on BDE terminals. If you want to use the absence workflow on a terminal where dialogs for the terminal or the terminal group exist, you must copy and enable the dialogs *P\_FZP*, *P\_FZP\_INS*, *P\_FZP\_UPD* and *P\_FZP\_DEL* for the terminal or the terminal group.

## 4 Approval and Rejection of Absence Requests

### Overview

Absence requests are approved and rejected in the MOC via [absence planning](#) and [personnel scheduling](#).

### 4.1 Approval and rejection in absence planning

For approving and/or rejecting an absence request in [absence planning](#), select the relevant absence; then click one of the following buttons in the toolbar:



#### Approve request

Function authorization: pabp.sign

This button is used to approve a requested absence. Further processing is executed in the same way as for approving a request in escalation management.



#### Reject request

Function authorization: pabp.reject

This button is used to reject a requested absence. Further processing is executed in the same way as for rejecting a request in escalation management.

### 4.2 Approval and rejection in personnel scheduling

For approving and/or rejecting an absence request in [personnel scheduling](#), select a day of the relevant absence, open the context menu by right clicking and choose the function *Approve request* and/or *Reject request* in the submenu *Absence* of the context menu:

