

1 Configuration Absence Workflow

Overview

Employees can use the absence workflow to request absences via Internet and/or Intranet. When a request has been filed, the supervisor is informed and can then approve or reject the request. The employee receives a notification via e-mail or on the terminal if the absence request was approved or not.

The settings for the absence workflow are configured in different applications on the MOC:

Configuration – Basic Settings

Menu	System administration → System settings → Basic settings
Transaction code	setup
Function authorization	setup

In the tab *ESK* of the application [Basic settings](#), the e-mail server must be entered so that notifications for absence times and their approval and/or rejection can be forwarded to the employees by e-mail:

The screenshot shows the 'Basic settings' application window with the 'ESK' tab selected. The 'SMTP server' field is set to 'smtp.bsp.intern'. The 'Port' field is set to '0'. The 'Timeout' field is set to '0' with a unit of '[ms]'. The 'Sender' field is set to 'automail@bsp.de'. The 'SMS path' field is set to 'SMS' and the 'Pager path' field is set to 'PAGER'. Both the 'SMS path' and 'Pager path' fields have a three-dot menu icon to their right.

Field descriptions

It is important to specify the IP address of the SMTP server and the sender of the mails that are sent.

SMTP server

To send e-mails, enter the IP address or name of the local SMTP server in the *SMTP server* field.

Sender

You can enter a central e-mail account. E-mails sent via HYDRA Escalation Management will then have this central account as sender.

Event configuration in the Escalation Management

Menu	Master data → Escalation management → Escalation configuration
Transaction code	esccfg
Function authorization	esccfg

You store the events for requesting, approving and rejecting absences in the [Escalation configuration](#):

The screenshot displays the 'Escalation configuration' window. The left pane shows a table of events with columns: Reference, Event, Designation, Recipient t..., Recipient, Priority, Color, Active, and ESK mode. The right pane shows the configuration for the selected event 'DB.FILL_LEVEL_EXCEEDED'. The configuration includes fields for Designation, Recipient type, Recipient, Priority, Color, and Active status. Below these are sections for 'Cyclic monitoring' and 'Automatic' actions after reading, closing, and sending messages.

Field descriptions

Event


FZ.APPLICATION_FILED -> triggered when an absence is requested.

FZ.APPLICATION_ALLOWED -> triggered after approval of an absence request.

FZ.APPLICATION_REJECTED -> triggered after rejection of an absence request.

FZ.APPLICATION_WITHDRAWN -> triggered after withdrawal of an absence request by an employee.


Event tab for FZ.APPLICATION_FILED

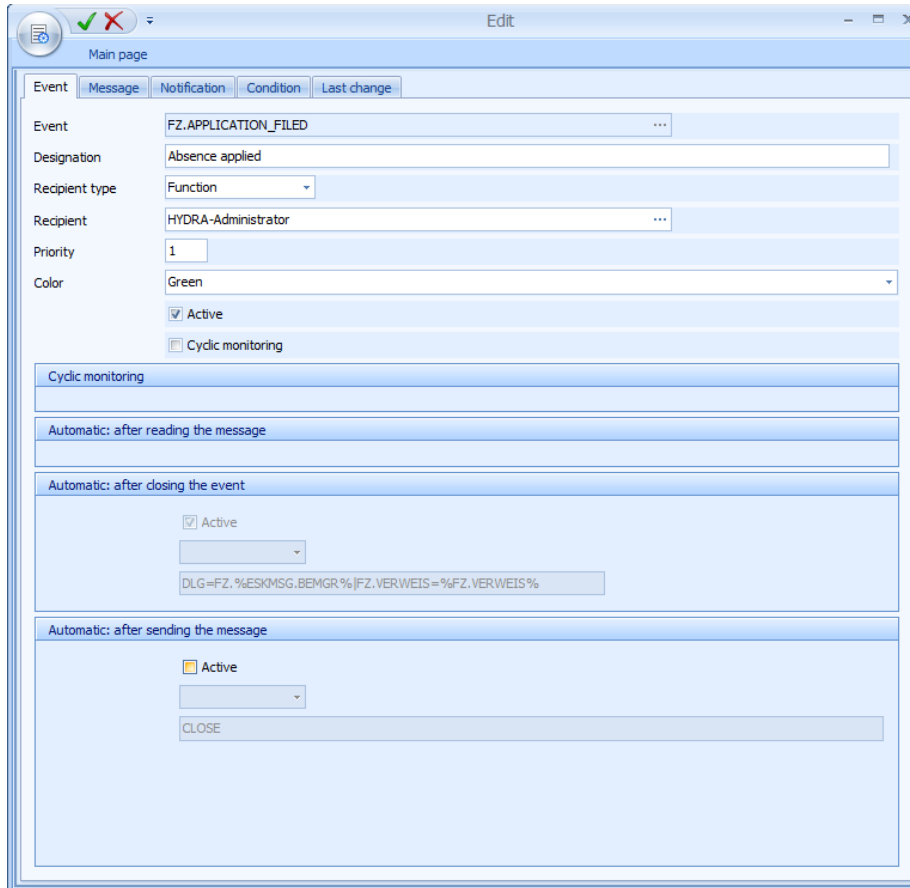

The screenshot shows the 'Event' tab configuration for 'FZ.APPLICATION_FILED'. The window has a title bar with 'Edit' and standard window controls. Below the title bar is a 'Main page' tab. The configuration is organized into several sections:

- Event Details:**
 - Event: FZ.APPLICATION_FILED
 - Designation: Absence applied
 - Recipient type: Function
 - Recipient: HYDRA-Administrator
 - Priority: 1
 - Color: Green
 - ☒ Active
 - ☐ Cyclic monitoring
- Cyclic monitoring:** (Section header)
- Automatic: after reading the message:** (Section header)
- Automatic: after closing the event:**
 - ☒ Active
 - DLG=FZ. %ESKMSG.BEMGR%|FZ.VERWEIS=%FZ.VERWEIS%
- Automatic: after sending the message:**
 - ☐ Active
 - CLOSE

Event tab for FZ.APPLICATION_ALLOWED

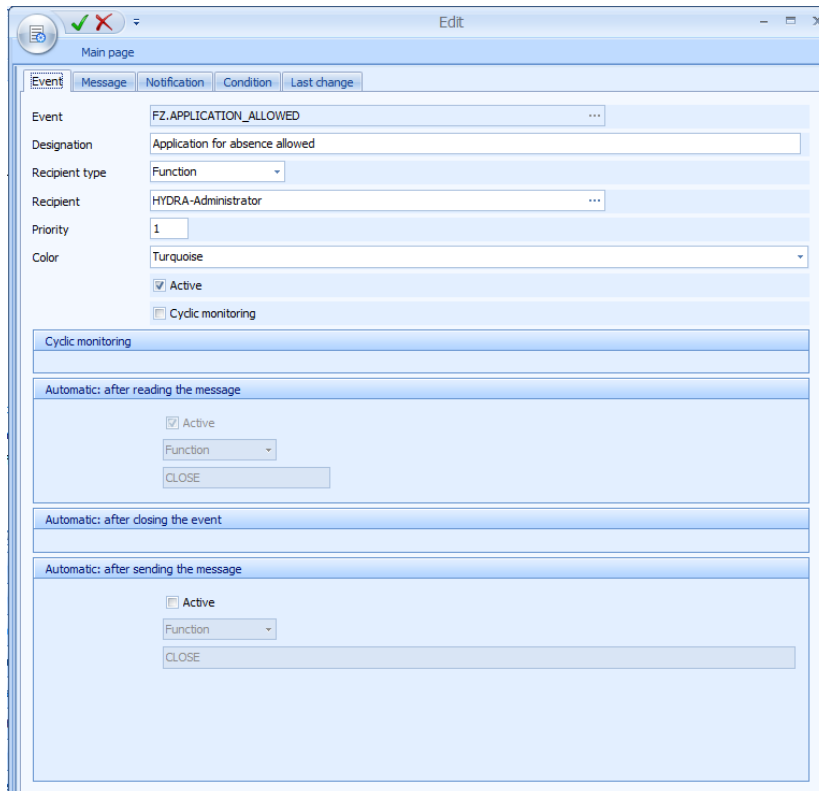

The screenshot shows the 'Event' tab configuration for 'FZ.APPLICATION_ALLOWED'. The window has a title bar with 'Edit' and standard window controls. Below the title bar is a 'Main page' tab. The configuration is organized into several sections:

- Event Details:**
 - Event: FZ.APPLICATION_ALLOWED
 - Designation: Application for absence allowed
 - Recipient type: Function
 - Recipient: HYDRA-Administrator
 - Priority: 1
 - Color: Turquoise
 - ☒ Active
 - ☐ Cyclic monitoring
- Cyclic monitoring:** (Section header)
- Automatic: after reading the message:**
 - ☒ Active
 - Function
 - CLOSE
- Automatic: after closing the event:** (Section header)
- Automatic: after sending the message:**
 - ☐ Active
 - Function
 - CLOSE

Event tab for FZ.APPLICATION_REJECTED

The screenshot shows the 'Event' tab configuration for 'FZ.APPLICATION_REJECTED'. The 'Designation' is 'Application for absence refused'. The 'Recipient type' is 'Function' and the 'Recipient' is 'HYDRA-Administrator'. The 'Priority' is '1' and the 'Color' is 'Pink'. The 'Active' checkbox is checked, and 'Cyclic monitoring' is unchecked. Below these are three sections for automatic actions: 'Cyclic monitoring' (empty), 'Automatic: after reading the message' (with 'Active' checked and 'Function' set to 'CLOSE'), and 'Automatic: after sending the message' (with 'Active' unchecked and 'Function' set to 'CLOSE').

Event tab for FZ.APPLICATION_WITHDRAWN

The entries in the *Message* and *Notification* tabs have the same settings as the approval of an absence request.

Message tab

You can define the subject and text of the message in the *Message* tab

The screenshot shows the 'Message' tab configuration for 'FZ.APPLICATION_REJECTED'. The 'Subject' is 'Application for absence refused'. The 'Text' is 'Your absence request from %FZ.DATB until %FZ.DATE% has been rejected.' Below the text are two dropdown menus: 'Available placeholders' and 'System variables'.

Examples:

Person %FZ.PNR% %FZ.NAME:PNR% has requested %FZ.BEZL:ENTLTMOD% from %FZ.DATB date dd.mm.yyyy% to %FZ.DATE date dd.mm.yyyy%.

Your absence request for the period from %FZ.DATB date dd.mm.yyyy% to %FZ.DATE date dd.mm.yyyy% absence %FZ.ENTLTMOD% %FZ.BEZL:ENTLTMOD% has been approved.

Your absence request for the period from %FZ.DATB date dd.mm.yyyy% to %FZ.DATE date dd.mm.yyyy% absence %FZ.ENTLTMOD% %FZ.BEZL:ENTLTMOD% has been rejected.

The following placeholders are available for creating the message:

Event	Acronyms	Description
FZ.APPLICATION_FILED FZ.APPLICATION_ALLOWED FZ.APPLICATION_REJECTED FZ.APPLICATION_WITHDRAWN	FZ.DATB	Start date
	FZ.BEZL	Comment
	FZ.BEZL:ENTLTMOD	Absence designation
	FZ.VERWEIS	Unique record number
	FZ.DATE	End date
	FZ.ENTLTMOD	Absence payment
	FZ.FIR	Company from the absence planning
	FZ.BEZE:ENTLTMOD	Absence abbreviation
	FZ.PNR	Personnel number
	FZ.NAME:PNR	Person's name
	FZ.PNAME	Last name
	FZ.PVORNAME	First name
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	E-mail (business)
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	The person's activity
	PNR.PNR:VGS	The supervisor's personnel number
	FZ.KAT	Absence category
	FZ.DAT:APPLY	Date of request
	FZ.ZEI:APPLY	Period of request
FZ.APPLICATION_ALLOWED FZ.APPLICATION_REJECTED	FZ.BEARB	Modified by
	FZ.NAME:BEARB	Editor name

Event	Acronyms	Description
FZ.APPLICATION_REJECTED	FZ.ESK:BEM	Reason of reject <i>This variable is only available on the HYDRA systems with at least Service Pack 9 (2016).</i>

Notification tab

You can configure how the message is sent in the *Notification* tab. You can see in the example below, that the notification is sent to the console (MOC) where the supervisor is logged on, and additionally by e-mail.

If the e-mail notification type is active, an additional field is shown. You can enter one or more valid e-mail addresses, separated by a comma, in the *Send e-mail by CC to* field. When the e-mail is sent to the recipient of the escalation, a copy goes to the CC addressee(s):

The screenshot shows a software window titled 'Edit' with a 'Main page' tab. The 'Notification' sub-tab is active. It contains six 'Condition' sections, each with 'Operator' and 'Type' dropdown menus. Condition 1 is set to 'to' and 'E-mail'. Condition 2 is set to 'and' and 'Console'. Condition 3 is set to 'and' and 'Pager'. Conditions 4, 5, and 6 have empty dropdowns. Below the conditions is a field labeled 'Send e-mail by CC to' with a text input area and a button with three dots.



If a message cannot be sent to the recipient of the escalation by e-mail, no copy is sent to the CC addressee, either. This could be the case if he/she does not have any e-mail address. No e-mail notification is required for employees for whom no e-mail address is entered in the personnel master record.



This notification type is configured in a way that the message is displayed only once on the PZE terminal and is removed after a maximum of 4 weeks. However, the message can be displayed several times during the period of the cyclic loading of authorizations. The message is displayed with the following actions on the PZE terminal: In, out, break, info, message and absence reason. Messages can only be displayed on terminals of the type CT-36x, CT-37x and CT-38x.


Data retention of escalations

By default, escalations are stored for 30 days. With absence requests, you must usually extend this period so that the request is still displayed when the absence only starts half a year later, for example.

Supervisor and E-mail Address Configuration


Menu	Master data → Staff → HR master data
Transaction code	Pers
Function authorization	Pers

The person's supervisor is entered in the *Person* tab of the [HR master data](#). Absence times requested in the workflow are forwarded to this supervisor.

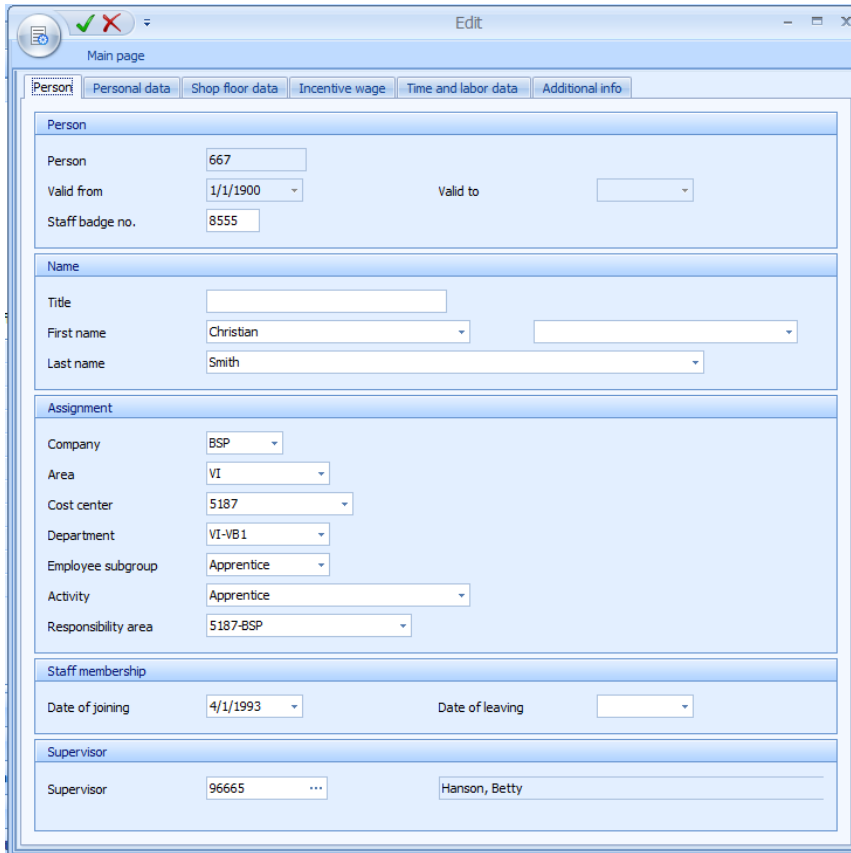

Person	
Person	667
Valid from	1/1/1900
Staff badge no.	8555
Valid to	
Name	
Title	
First name	Christian
Last name	Smith
Assignment	
Company	BSP
Area	VI
Cost center	5187
Department	VI-VB1
Employee subgroup	Apprentice
Activity	Apprentice
Responsibility area	5187-BSP
Staff membership	
Date of joining	4/1/1993
Date of leaving	
Supervisor	
Supervisor	96665 ... Hanson, Betty

Enter the e-mail address in the *Company e-mail* field in the *Personal Data* tab for employees and supervisors that are notified by e-mail.

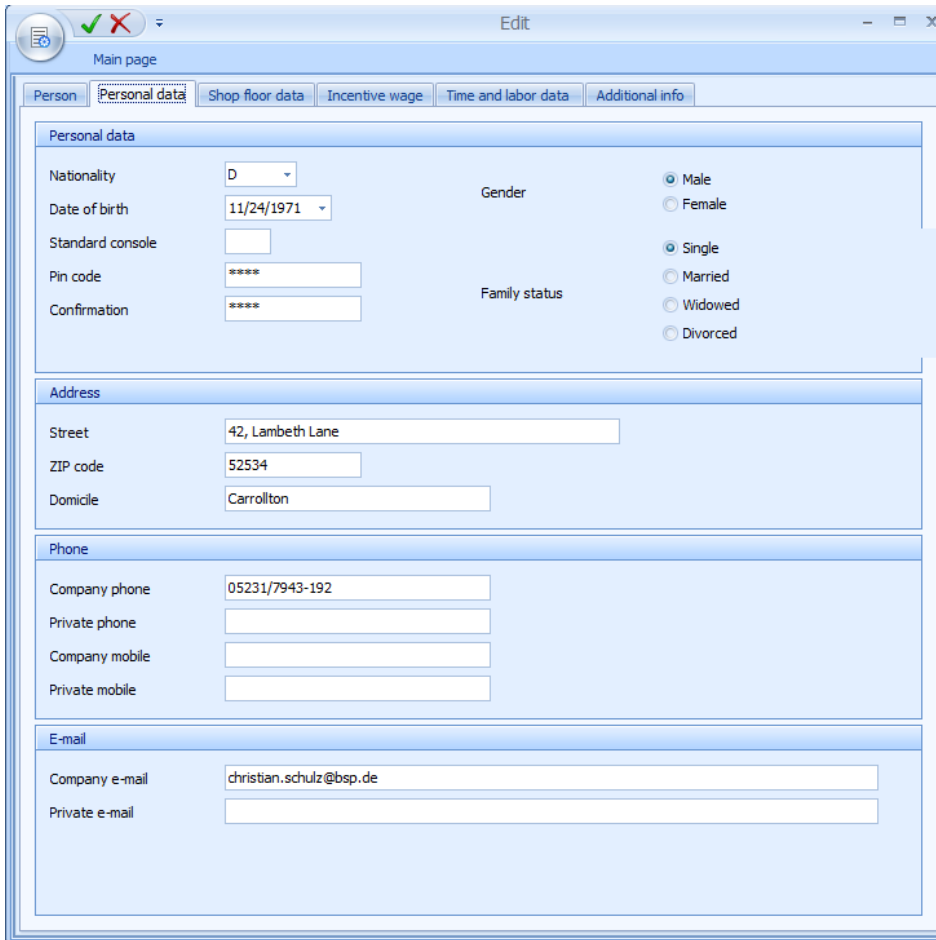

Allocation of Supervisor to HYDRA User

Menu	System administration → User administration → Users
Transaction code	user
Function authorization	user

When the supervisor logs on to the HYDRA MOC, the system displays the requests for absences in the *Current Escalations* window. For this to work, it is necessary to link the personnel number of the supervisor and the [User](#) number he/she uses to log on.

The screenshot shows a software window titled "Edit" with a standard Windows-style title bar. Inside the window, there is a "Main page" tab. The form contains the following fields and controls:

- User: Text field containing "mpdvadm".
- Name: Empty text field.
- Password: Empty text field.
- Password confirmation: Empty text field.
- Locked: Checkable box (unchecked).
- Lock from: Dropdown menu.
- Lock till: Dropdown menu.
- User has to change password when logging on the next time: Checkable box (unchecked).
- Company: Text field with a search icon (three dots).
- Person: Text field with a search icon (three dots).
- SSO active: Checkable box (unchecked).
- SSO user: Empty text field.
- SSO domain: Empty text field.


Company, Person

Assignment of the user to a person in the HR master data.

Control of Absence Times that are displayed

Menu	Master data → Labor time → Control of absence times
Transaction code	abse
Function authorization	abse

The absence times you can select in the *Absence workflow* are specified in the [Control of absences](#) window.

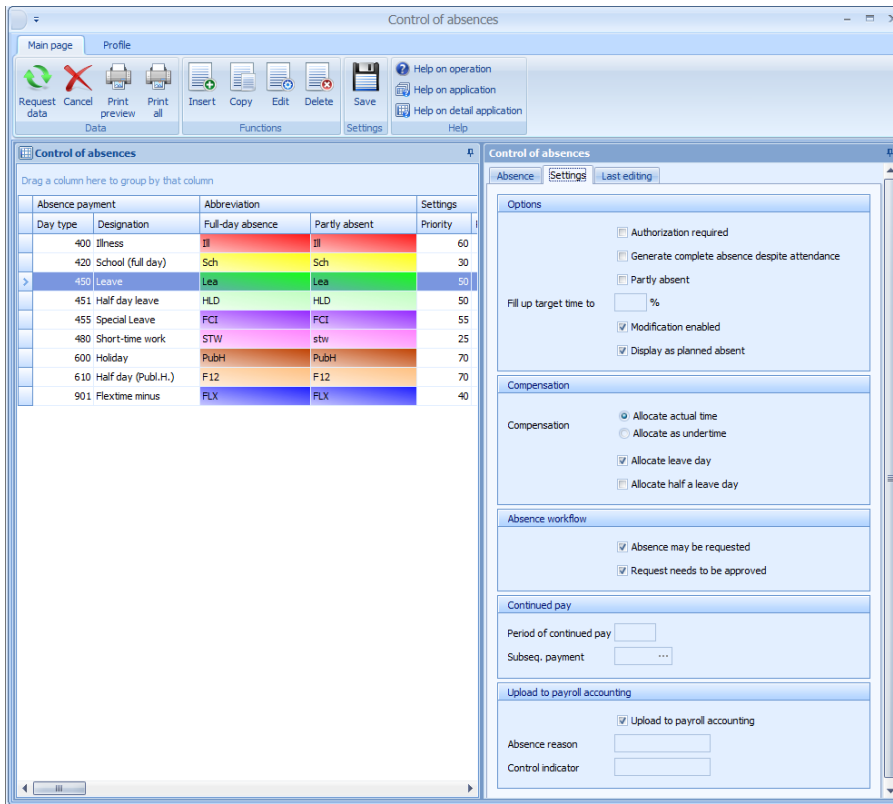

Day type	Designation	Full-day absence	Partly absent	Priority
400	Illness	Ill	Ill	60
420	School (full day)	Sch	Sch	30
450	Leave	Lea	Lea	50
451	Half day leave	HLD	HLD	50
455	Special Leave	FCI	FCI	55
480	Short-time work	STW	stiw	25
600	Holiday	PubH	PubH	70
610	Half day (Publ.H.)	F12	F12	70
901	Flextime minus	FLX	FLX	40

Absence may be requested

The button specifies whether you can select the absence time using the Web interface.

Request needs to be approved

This parameter is used to specify whether the absence time requested via the absence workflow must be approved by the supervisor or whether it is automatically approved.

2 Replacements

Overview

If the supervisor is absent and an absence request is made via absence workflow, then you can forward this absence request to the person replacing the supervisor (replacement).

The settings for the replacement configuration are made in different applications in HYDRA MOC:

Configuration – HR master data

Menu	Master data → Staff → HR master data
Transaction code	pers
Function authorization	pers.*

You specify the replacement of the supervisor in the application [HR master data](#).

Field descriptions

It is important to specify *Replacement 1* and *Replacement 2* in the HR master data of the relevant supervisor.

Replacement 1

Specifies the first person replacing the supervisor. You can use this field to specify the person that replaces the supervisor in case of absence. The absence workflow uses this field when a user replacing the supervisor is required.

Replacement 2

Specifies the second person replacing the supervisor. You can use this field to specify the person that replaces the supervisor and the first replacement in case of absence. The absence workflow uses this field when a user replacing the supervisor is required.

Configuration – INI configuration

Menu	System administration → System settings → INI configuration
Transaction code	inicfg
Function authorization	inicfg.*


INI configuration:


- Name: FORWARDING
- Section: WORKFLOW
- Key: DEPUTY
- Value: 7

By default, the value must be set to 7.

The INI configuration specifies that the supervisor must be available at least 7 days before start of the holiday leave of the person. Only then can the supervisor authorize or reject the request. If the supervisor cannot guarantee this because of an absence (e.g. holiday leave or sick leave), the absence request is sent to the first replacement. HYDRA uses the absence planning or the personnel scheduling to identify if a supervisor is available or not. If also the first person replacing the supervisor is not available these 7 days, then the absence request is sent to the second replacement.

Graphic presentation:

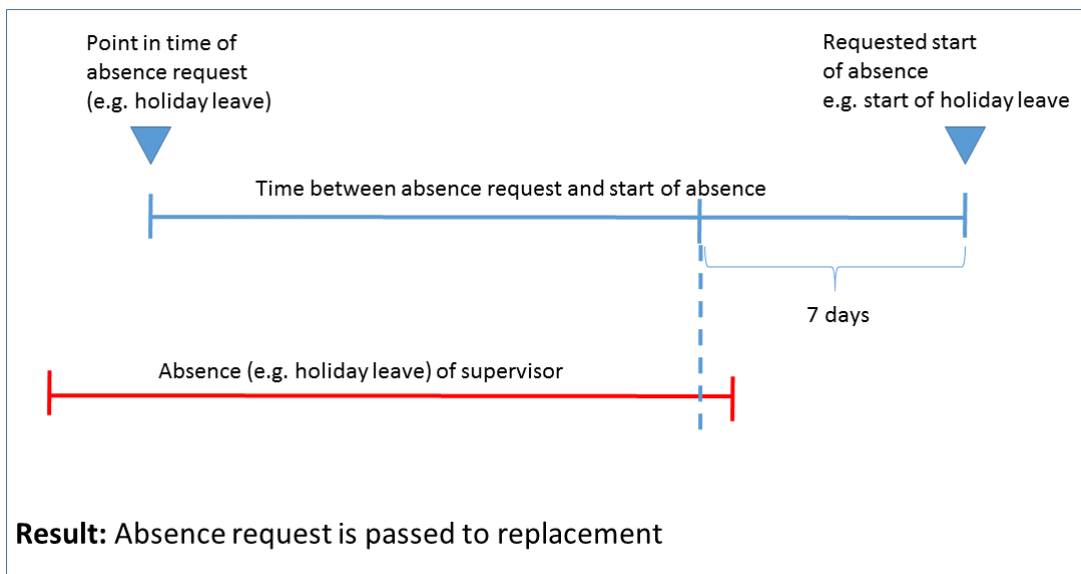

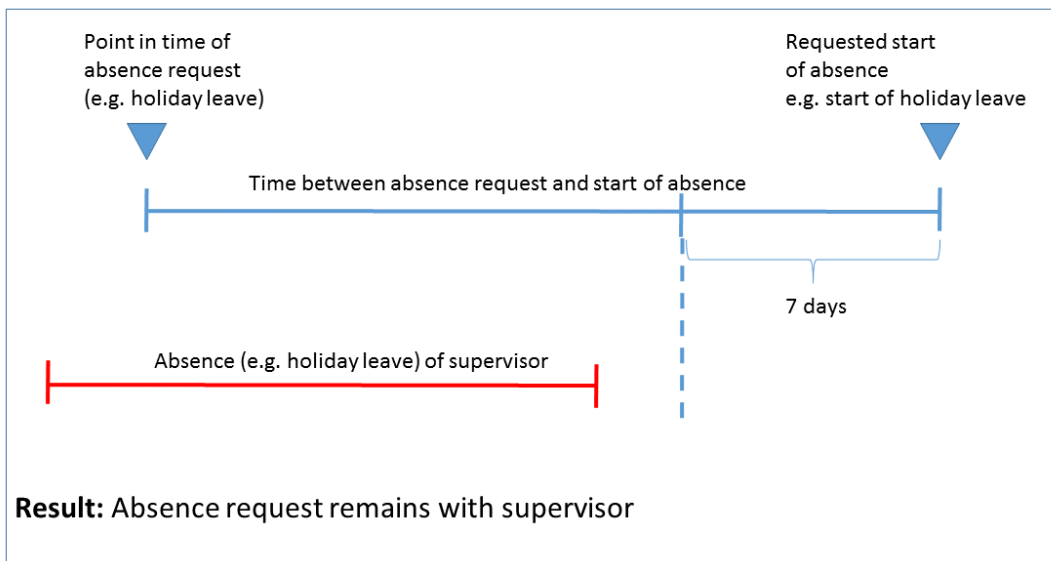

If the supervisor, the replacement and the second replacement are not available in the specified period (7 days), then the absence request is only sent to the supervisor.