

1 Sending Time Sheet via E-mail

Overview

You can use this function to send the time sheet to employees via e-mail. You call the function in the application [Time sheet](#) using the button *Send e-mail*.

Requirements

The e-mail address of persons that send/receive e-mails must be stored in the [HR master data](#) in field *Company e-mail*. You can find two methods to send e-mails in the following. We recommend the method SMTP.



If the persons have an e-mail address, the name is displayed in blue font and underlined on the right hand side of the detail application.

Method SMTP

The e-mails are sent via HYDRA server. To activate the e-mail dispatch using the SMTP protocol, you must make the following entry in the [INI configuration](#):

INI configuration:	PERSONALTIMESHEET
Section:	SENDEMAIL
Key:	PROTOCOL
Value:	SMTP

To send the time sheet using the SMTP protocol, you must carefully update the fields *SMTP Server* and *Sender* in tab *ESK* of the [Basic settings](#).

The screenshot shows the 'Time sheet' application window. The 'Send e-mail' button is highlighted in the top toolbar. Below the toolbar, the 'Selection' section shows 'Person from' 96665, 'Name' Hanson, Betty, and 'Month' 1 / 2015. The 'Time sheet' section shows 'Time sheet' 10, 'HYDRA Timesheet', 'Year' 2015, and 'Settlement period' 1. The 'Time sheet' table is displayed with columns: Date, Beginning, End, Break, Payment, Target time, Actual time, and Flextime. The table shows data for the month of January 2015, including days 1/1 Th, 1/2 Fr, 1/3 Sa, 1/4 Su, 1/5 Mo, 1/6 Tu, 1/7 We, 1/8 Th, 1/9 Fr, 1/10 Sa, 1/11 Su, 1/12 Mo, 1/13 Tu, 1/14 We, 1/15 Th, 1/16 Fr, and 1/17 Sa. The 'Account balances at begin. of month' section shows: Flextime 16:45, Overtime 2:00, Flexible time 0:00, and Leave account 33,0, Monthly account 0:00.

Date	Beginning	End	Break	Payment	Target time	Actual time	Flextime
1/1 Th	08:00	16:30	0:00	600 Holiday	8:00	8:00	0:00
1/2 Fr	07:12	16:25	0:30	100 Flextime Mo-Fr	8:00	8:00	0:00
1/3 Sa							
1/4 Su							
1/5 Mo	07:43	15:38	0:30	100 Flextime Mo-Fr	8:00	7:15	0:00
1/6 Tu	08:00	16:30	0:00	600 Holiday	8:00	8:00	0:00
1/7 We	07:14	15:00	0:45	100 Flextime Mo-Fr	8:00	11:01	0:00
1/8 Th	09:06	16:48	0:30	100 Flextime Mo-Fr	8:00	6:54	0:00
1/9 Fr	07:34	12:04	0:30	100 Flextime Mo-Fr	8:00	8:30	0:00
1/10 Sa							
1/11 Su							
1/12 Mo	08:00	16:30	0:00	450 Leave	8:00	8:00	0:00
1/13 Tu	08:00	16:30	0:00	450 Leave	8:00	8:00	0:00
1/14 We	08:00	16:30	0:00	450 Leave	8:00	8:00	0:00
1/15 Th	08:00	16:30	0:00	450 Leave	8:00	8:00	0:00
1/16 Fr	08:00	16:30	0:00	450 Leave	8:00	8:00	0:00
1/17 Sa							

If you want to receive a send confirmation with this sending method (SMTP), you can activate the confirmation via an additional [INI configuration](#):

INI configuration: FORWARD_MAIL_CONFIG
Section: FORWARD_MAIL_CONFIG
Key: BCCMAILADDRESS
Value: @user or a central mail address (e.g. timesheet.confirmsending@ex.com)



If you enter the value @user in the INI configuration, the confirmation mail is always sent to the e-mail address of the person that is stored for the [MOC user](#). If you enter a central e-mail address as value, e.g. timesheet.confirmsending@ex.com in the INI configuration, the confirmation mail is always sent to this central e-mail address.

With this dispatch mode (SMTP), you can be informed if mail delivery failed (e.g. recipient address does not exist). To activate this notification, make this additional INI configuration:

INI configuration: FORWARD_MAIL_CONFIG
Section: FORWARD_MAIL_CONFIG
Key: BOUNCEMAILADDRESS
Value: @user **or** a central mail address (e.g. timesheet.error@ex.com)



If you enter the value @user in the INI configuration, the error message is always sent to the e-mail address of the person that is stored for the [MOC user](#). If you enter a central e-mail address as value, e.g. timesheet.error@ex.com in the INI configuration, the error message is always sent to this central e-mail address.

Method XMAPI


Instead of using the SMTP protocol (Simple Mail Transfer Protocol), you can also use the XMAPI protocol (eXtended Messaging Application Program Interface) to send the time sheet via e-mail. In this case, you must install an e-mail program that supports the XMAPI protocol on the PC where you send the mails. E-mails are sent using the account of the registered user.



The dispatch of time sheets via the XMAPI interface has been tested and released for Microsoft Outlook. If other mail systems are used, the customer must test these.

Processing

When the e-mails are sent, the system informs the user about the number of time sheets sent to employees. The system also identifies the number of persons where no e-mail address is stored in the HR master data:

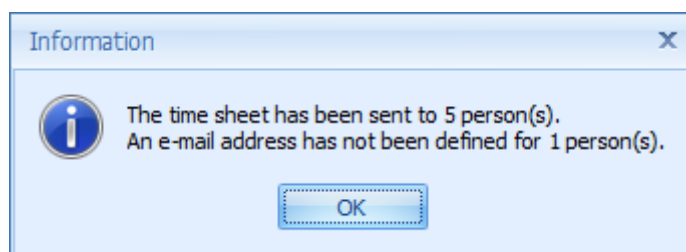

With dispatch mode XMAPI, the mails are stored in the outbox of the e-mail client.

Configuration


You can change the file name of the PDF file sent and the e-mail texts using the [INI configuration PERSONALTIMESHEET](#) with section *SENDEMAIL*:

Key	Description
FILENAME	File name without extension "pdf"
SUBJECT	E-mail subject
MESSAGE_1	Message text (body) of the e-mail
MESSAGE_2	Message text (body) of the e-mail (2nd part)
MESSAGE_3	Message text (body) of the e-mail (3rd part)
MESSAGE_4	Message text (body) of the e-mail (4th part)
MESSAGE_5	Message text (body) of the e-mail (5th part) (the 5 message texts are each linked with a line break.)
SENDEMAIL	FALSE: The e-mail is created but not sent. Otherwise (default): The e-mail is created and sent immediately.

The system processes the following placeholders in these configured texts:

Placeholders	Data field
<year>	Year
<period>	Period
<from_date>	Date from
<to_date>	Date to
<person>	Personnel number
<name>	Name
<firstname>	First name
<lastname>	Last name
<newline>	Line break

The screenshot below shows an example of the INI configuration PERSONALTIMESHEET:

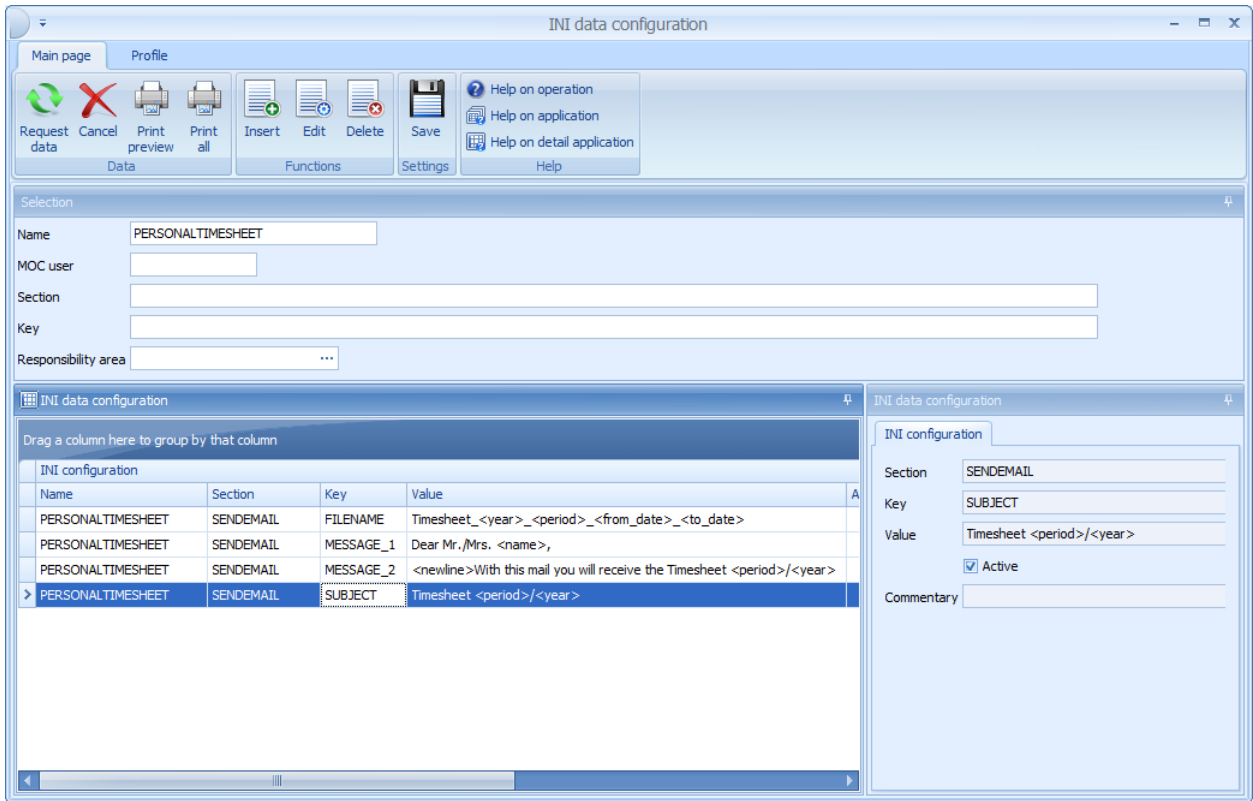

The screenshot shows the 'INI data configuration' window. The 'Selection' section at the top has the following fields:

- Name: PERSONALTIMESHEET
- MOC user:
- Section:
- Key:
- Responsibility area: ...

The main area displays a table of INI configuration data:

Name	Section	Key	Value
PERSONALTIMESHEET	SENDEMAIL	FILENAME	Timesheet_<year>_<period>_<from_date>_<to_date>
PERSONALTIMESHEET	SENDEMAIL	MESSAGE_1	Dear Mr./Mrs. <name>,
PERSONALTIMESHEET	SENDEMAIL	MESSAGE_2	<newline>With this mail you will receive the Timesheet <period>/<year>
PERSONALTIMESHEET	SENDEMAIL	SUBJECT	Timesheet <period>/<year>

The right-hand pane shows the 'INI configuration' details for the selected entry:

- Section: SENDEMAIL
- Key: SUBJECT
- Value: Timesheet <period>/<year>
- ☒ Active
- Commentary: