

1 Maintenance Manager 2.0

Overview

The Maintenance Manager is a web based maintenance tool to manage HYDRA systems.

You use this tool to edit server and client components.

1.1 Purpose

Open the web front end browser in order to use the Maintenance Manager.

The address for the web front end is `http://ServerName:Port/` (e.g. `http://hydra:18080/` if the server is *hydra* and the standard port *18080* is used for the first system. Then port *18081*, ... for further systems).

1.2 Login

You have to log in to use the Maintenance Manager. Password for the login is:

Mosbach74821

Please login to access the application.

Password: *

Downloads

 MOC_Updater.zip (12 MB)

 MOC.zip (470 MB)

Figure 1: Login Maintenance Manager

After the login, the start page of the Maintenance Manager opens.



Figure 2 Main Page Maintenance Manager

1.3 Configuration

Menu item: Settings

Prior to use, you can configure the Maintenance Manager and adjust the manager to the conditions of the HYDRA system. The user can neglect the above if you use the relevant installation service.

However, the user must edit the following values in tab *System*:

Value	Description
WSP host	Host name of the WSP server
WSP port	Port of the WSP server
Tomcat path	Installation directory of the Tomcat
Tomcat version	Tomcat Version (compatible with 6 or 8)
Java version	Java Version (compatible with 5 or 8)

Optionally, you can define a directory that is read at regular intervals and that automatically reads update packages that have not yet been installed. For example, you can use a network share to update and/or install several systems with the same update packages.

Click the Save button to save the configuration.

Figure 3 System configuration

The tab *MOC settings* includes the settings to configure the MOC Updater. Use these settings to configure the process and input fields of the MOC Updater GUI. You can also specify whether users are allowed to change the fields in the MOC Updater GUI.

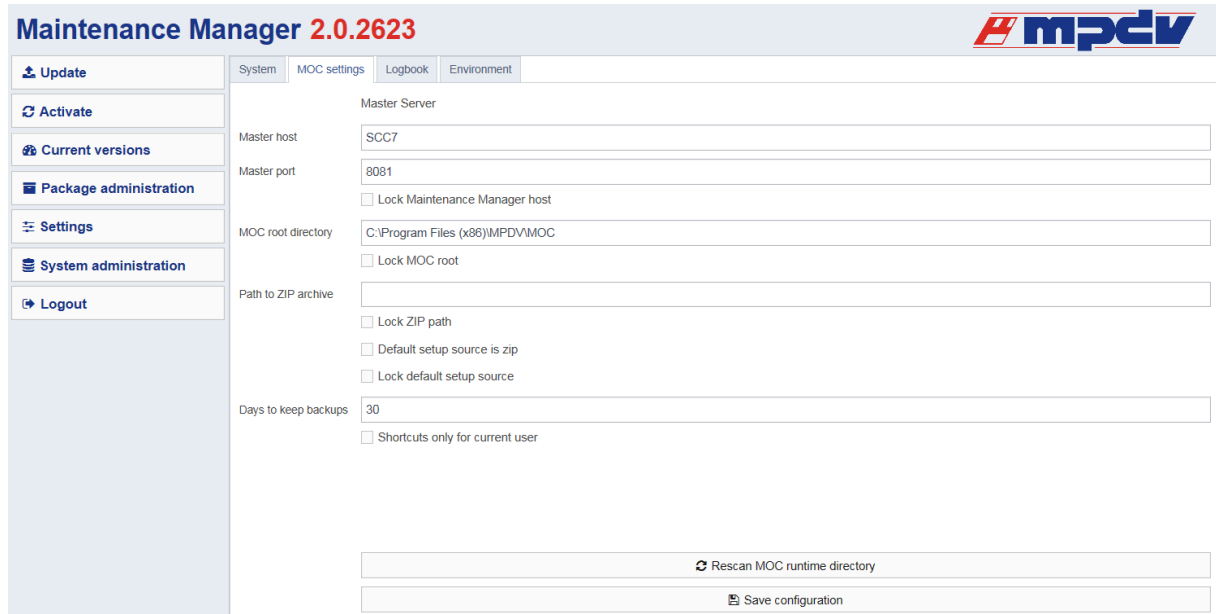


Figure 4: Configuration master server

Value	Description
Master host	Standard value of the host name of the master server that the MOC Updater uses during setup. Standard value: Identical with the host name of the Maintenance Manager. If several systems are available and only one master server is configured, this master server must be entered.
Master port	Standard value of the port of the master server that is used in the GUI of the MOC Updater during setup. Standard value: Identical with the port of the Maintenance Manager.
MOC root directory	Standard value of the target directory of the MOC installation that is used in the GUI of the MOC Updater during setup. Standard value: "C:\Program Files (x86)\MPDV\MOC"

Lock MOC root	The lock specifies if the user can change the GUI of the MOC Updater. Standard value: disabled
Path to ZIP archive	Standard value of the file path to the ZIP archive of the MOC installation that is used in the GUI of the MOC Updater during setup. Standard value: not specified
Lock ZIP path	The lock specifies if the user can change the path to the ZIP archive in the GUI of the MOC Updater. Standard value: disabled
Default setup source is zip	Activates the <i>ZIP archive</i> as standard value for the installation source in the GUI of the MOC Updater. Standard value: "Maintenance Manager"
Lock default setup source	The lock specifies if the user can change the value for the installation source in the GUI of the MOC Updater. Standard value: disabled
Days to keep backups	Specifies the duration (in days) of how long to keep the backups generated during update in the client. Standard value: 30
Shortcuts only for current user	This activates that the systems selects by default <i>only the currently logged on user</i> , when generating MOC links in the GUI of the MOC Updater. Standard value: "All users of this PC".

Click *Rescan* to release the saved settings so that the MOC Updater can distribute and use these settings.

If you make changes to the *MOC* subdirectory of the *Runtime* directory, then you also have to click the *Rescan* button. This process is necessary for the MOC Updater to find and install the changes when searching for updates.

Click the *Save* button to save the configuration.

The *Logbook* tab provides information about the last deployments.

The screenshot shows the Maintenance Manager 2.0.2623 interface with the 'Logbook' tab selected. The left sidebar contains navigation links: Update, Activate, Current versions, Package administration, Settings, System administration, and Logout. The main content area displays a table with two columns: 'Timestamp' and 'Message'. A single entry is visible, dated 30.01.2017 15:25:31, with the message 'MM2 was updated with package 'MM2-2.0.2623.upd''. A 'Clear' button is located in the top right corner of the message area.

Timestamp	Message
30.01.2017 15:25:31	MM2 was updated with package 'MM2-2.0.2623.upd'

Figure 5: Information on the last installations.

The *Environment* tab shows the current environment variables.

The screenshot shows the Maintenance Manager 2.0.2623 interface with the 'Environment' tab selected. The left sidebar is identical to the previous screenshot. The main content area displays a table of environment variables and their values.

Environment variables	Value
PROCESSOR_LEVEL	6
FP_NO_HOST_CHECK	NO
ALLUSERSPROFILE	C:\ProgramData
PROCESSOR_ARCHITECTURE	AMD64
PSModulePath	C:\Windows\system32\WindowsPowerShell\1.0\Modules\
SystemDrive	C:
vmArguments	-Xmx512m -Xms256m
=E:	E:\Hydra2\MM2
=ExitCode	00000000
HYLIB	d:\hylib8
USERNAME	SCC7\$
ProgramFiles(x86)	C:\Program Files (x86)
HYENTW	q\
PATHEXT	.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH;.MSC
SHELLOPTS	igncr
bootLogFile	./log/bootloog.txt
UNIXMACHINE	WINNT
ProgramData	C:\ProgramData

Figure 6: Display of system settings

1.4 Package Deployment

1.4.1 General

Use the Maintenance Manager to install update packages for the HYDRA system. Such an update package may contain content for the client (MOC), the server, web services (JAVA) and updates for the Maintenance Manager itself.

Such an Update Package contains different types of packages.

- Client Updates for MOC
- Java Updates for web services
- Server Update for non-web service components of the server
- Maintenance Manager → Update of the Maintenance Manager

The different internal packages are installed for update according to their type.

1.4.2 Internal Package Types

1.4.2.1 Java

The Java software is located in the Tomcat "Web archive". This file has the extension **.war**. Web applications usually require further files (configurations, user exits, ...). These files are located in a subdirectory (e.g. MOC) that is specified by the environment variable JHYDRADIR.

In order to keep the update packages small, it is not always the complete web application that is exchanged but only the modified components.

1.4.2.2 Server

The server packages are the packages that have already been used with HYDRA 7. The packages are forwarded to the BAPI HYDRA.INSTALL which then manages the packages.

1.4.2.3 Client

The client software is managed and supplied for each domain. To execute the software in the client, a different structure is required.

For this reason the Maintenance Manager uses a split structure:

Updates	These are the individual update packages (containing one or several domains) installed in the Maintenance Manager. MaintenanceManager\upd\MOC
Runtime	This is the runtime version that the client requires to execute it.

	MaintenanceManager\rt\MOC
--	---------------------------

1.4.3 Deployment

Menu item: Update

The screen to deploy update packages contains only a button to select a file. The user must select the required update package. The button "Deploy package" installs the package in the Maintenance Manager. You can automatically activate the package if you select *Auto activate after deployment*. This option is selected by default.

IMPORTANT:

The function *Overwrite newer versions* is only available for Java components of the update package. Only use this function after consultation with MPDV.

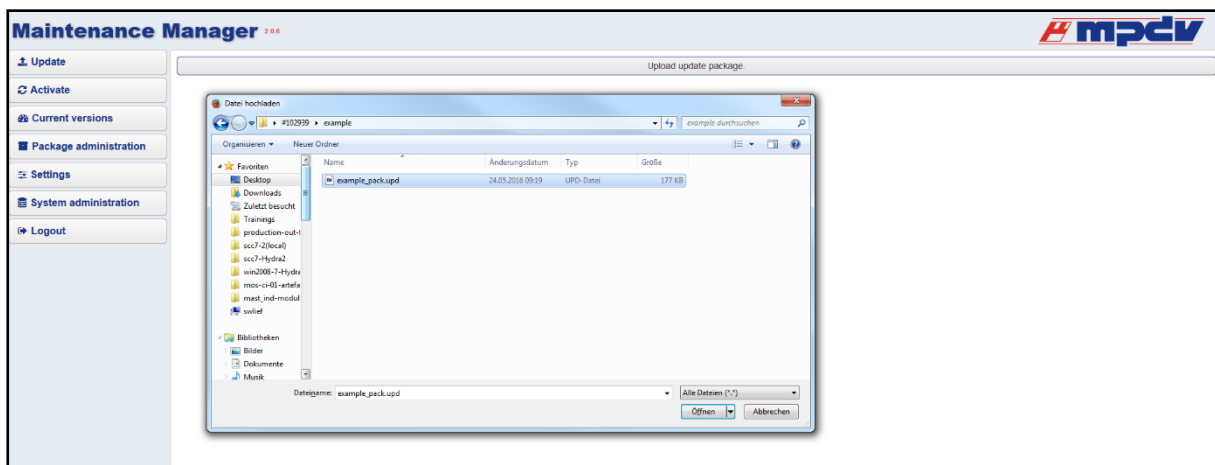


Figure 7: Selection of update package

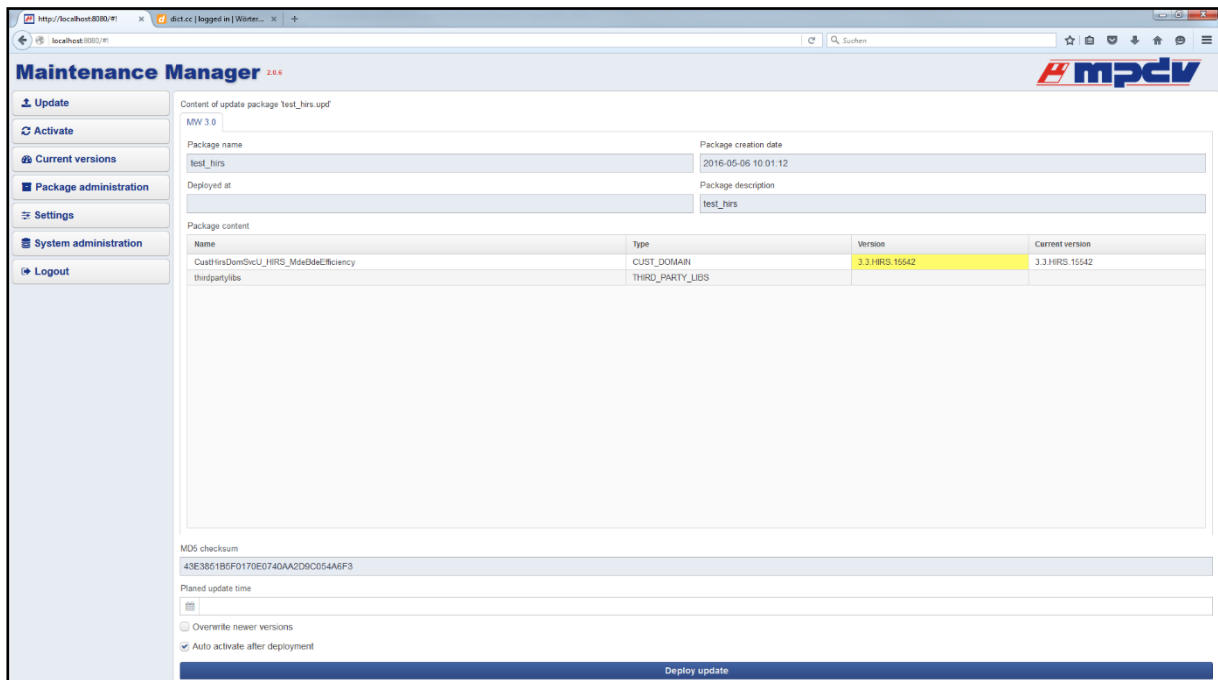


Figure 8: Deployment

During installation of update packages, the column *Version* of the included internal packages may be highlighted in color. If the column is highlighted in yellow, then the update package has the same version. If the column is highlighted in red, the shown version is older than the version of the already installed update package. In this case, the button *Deploy update* is blocked until the user selects *Overwrite newer versions*.

Maintenance Manager 2.0.7

Content of update package "PEP_0.upd"

MW 3.0

Package name: PEP_0

Package creation date: 2016-05-18 05:49:17

Deployed at:

Package description: PEP_0

Name	Type	Version	Current version
DumSrcSystem	DOMAIN	0.0 STD: 19343	0.0 STD: 19344
DumSrcPersonnelWorkplaceAssignment	DOMAIN	0.0 STD: 19394	0.0 STD: 19395
thirdpartylibs	THIRD_PARTY_LIBS		

Error - update Package contains older versions

MDS checksum: 1B0A0733D7EDFD532BFF6B4998E0411E

Planned update time:

☐ Overwrite newer versions

☒ Auto activate after deployment

Deploy update

Figure 9: Installing older update packages

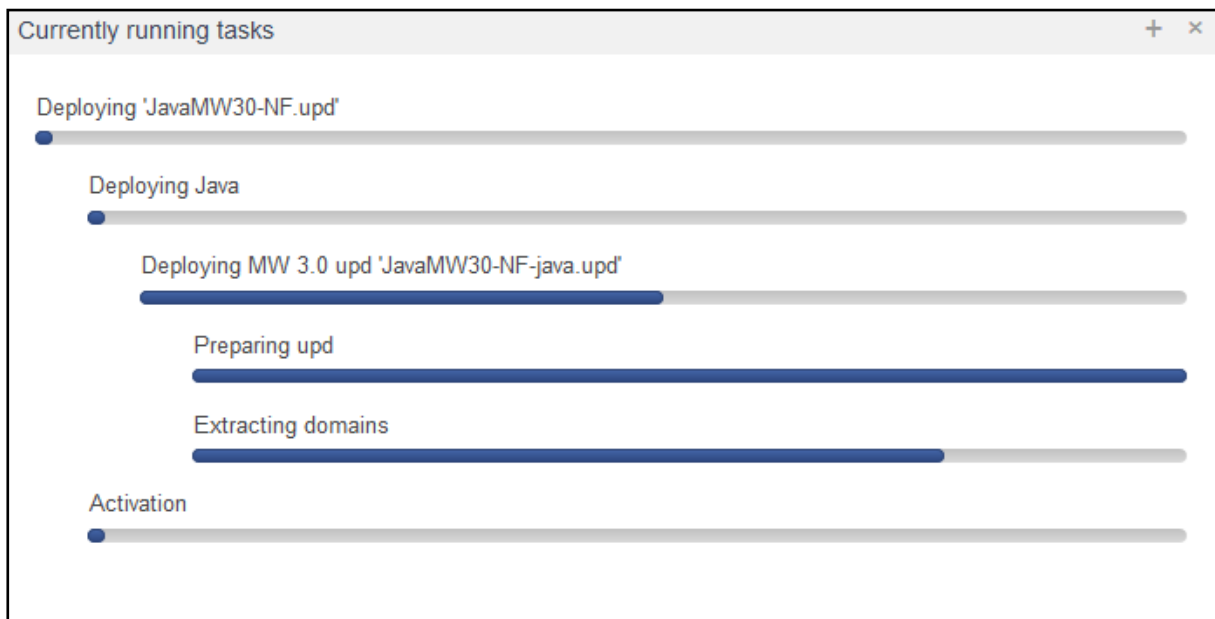


Figure 10: Progress during installation

1.4.4 Finishing an update

If you want to perform an update automatically at a specific point in time, select the required point in time for the update in the field *Planned update time* and confirm by clicking *Deploy update*.

Package administration

Settings

System administration

Logout

Marz 2017

Name	Version	Current version
ArchiveReloadManager	1.1.STD.52176	
AssessmentManagement	1.1.STD.51266	1.1.STD.51266
BOBatch	2.14.STD.52461	2.14.STD.51476
BOOrder	1.9.STD.52869	
BOPerson	1.13.STD.51280	1.13.STD.51280
CAQCharts	2.9.STD.51014	2.9.STD.51014
ControlChart	1.8.STD.52645	
Escalation	1.5.STD.52577	
EvaluationAssessmentCriterion	1.1.STD.51185	1.1.STD.51185

MD5 checksum

9C07E1130379B16CEE7F4913759F3202

Planned update time

17.03.17 10:34

☐ This UPD contains domains with older versions! Older versions will be skipped! Check to accept overwriting newer version with older one

☒ Auto activate after deployment

Deploy update

Figure 11: Scheduling of an update

The menu item *Update* shows the planned update time. Cancel the planned update using the function *Cancel planned update*.

Status

Update

Activate

Current versions

Package administration

Settings

System administration

Logout

Planned update time for '2017-03-15_HYDRA8_SP10_MaintenancePack_903-Linux.upd'

17.03.17 10:34

Cancel planned update


Figure 12: Cancelling an update

Open the log of the update using the menu item *Settings/Logbook* to check if the update has been performed successfully.

You can only schedule one update at a time. If you must install several updates simultaneously, you must combine all packages in one.

1.4.5 Automatic installation of updates

You can install updates automatically. Define a directory in the network where the Maintenance Manager checks every 5 minutes if new packages are available that are not yet installed. If a new package is found, it is immediately installed. The update is automatically activated.

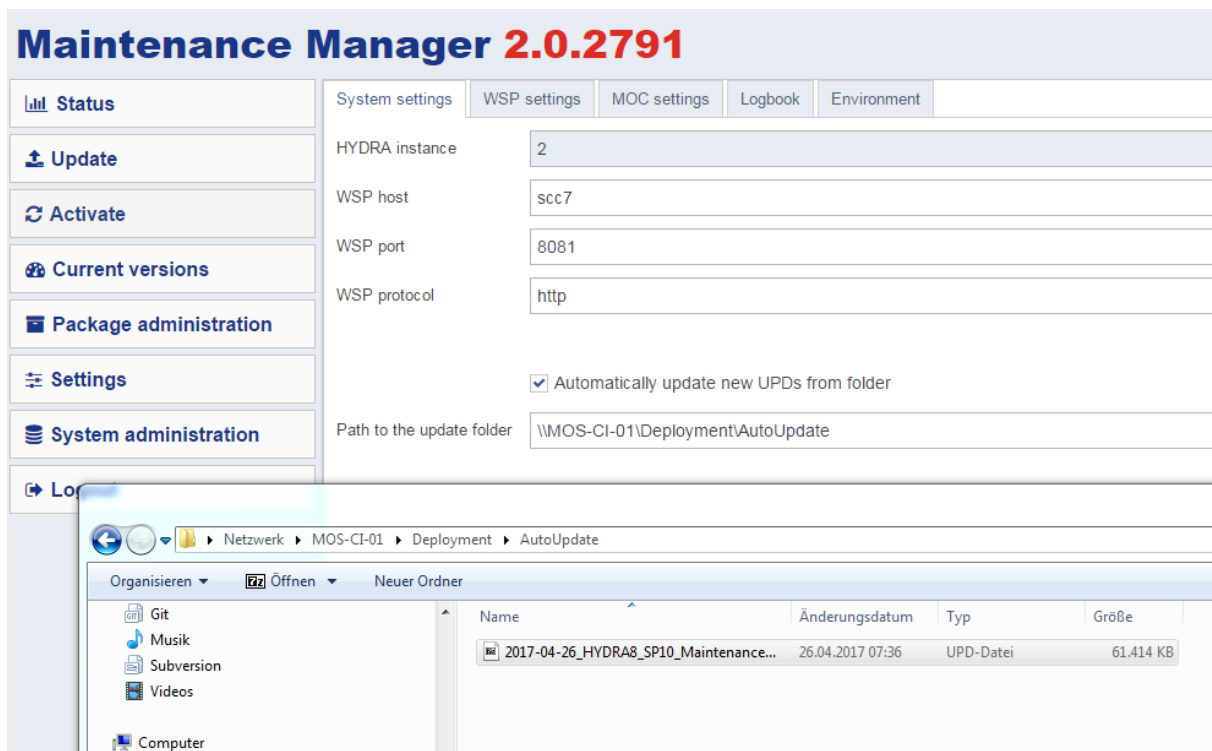

If several new UPDs are available in the directory, the packages are installed one by one. The oldest file is installed first.

1.5 Deployment

1.5.1 Administration of update packages

Menu item: Package administration

Tab: Server/Client

The process is the same for the deployment of client update packages and for Java update packages. If there are differences, then they are mentioned separately.

All updates installed in the Maintenance Manager are listed in the administration of update packages.

Whether or not an update package has been deployed to the runtime structure can be found in the content of the column *Deployed at*. If the update package has been deployed, then date and time of the update is shown in the column. If the update package has not been deployed to the runtime structure or has previously been undeployed, then the column remains empty. But the update package remains in the Maintenance Manager until it is finally deleted.

If the user selects an update package, detailed information is available for the package.

Depending on whether or not you have deployed an update package, the function *Deploy* or *Undeploy* is available. The deployment of an update package loads the contents into the local runtime structure. During the deployment, all files are saved that are overwritten by the content of the update package to enable an undeployment of the update package.

If the package that you want to deploy contains older versions than the runtime, the system queries if you want to deploy older versions nor not. **(Only carry out a deployment of older versions after consultation with MPDV!)** In case of a client undeployment, the versions are not checked as it might be required in some cases to change a component with an older version.

The undeployment removes the components of the update package from the runtime structure and replaces the components with the backup of the previously loaded update package.

You can only undeploy the last deployed update package because components of a newer update package might be overwritten during backup of the update package being currently undeployed.

Maintenance Manager 2.0.2623

WSP packages | MOC packages

Order	Package name	Deployed at
10	Cancel	2016-12-19 14:39:49
11	Cancel_1	2016-12-20 09:38:05
12	Cancel_3	2016-12-20 10:13:54
13	Cancel_5	2016-12-20 14:21:31
14	2016-12-20_JAE_FctMapping_Java_Core_Cust-java	2016-12-20 16:29:02
15	2016-12-22-TBA	2016-12-22 10:23:51
16	2016-12-22-201611026_POST_CUST-20161102_001-productionreporting-java	2016-12-22 15:55:02
17	2016-12-23_2_CleanupTicketVerification	2016-12-23 10:42:19
18	2016-12-28-Keyfigure-TBA	2016-12-28 08:27:00
19	2016-12-13_BOResource_Cust-java	2016-12-28 10:07:41
20	2016-12-21-201609194_STOR_ERW_CUST_EUROPA_001-productionreporting_Cust-java	2016-12-28 10:07:42
21	2017-01-03-#106869-resource-java	2017-01-03 10:13:54
22	2017-01-27-#107454-emg-archiving-java	2017-01-27 13:29:07
23	2017-01-27-#107464-operation-java	2017-01-27 14:44:42

Buttons: Delete, Undeploy, Deploy, Create UPD, Download UPD

Package details for 2017-01-27-#107464-operation-java:

- Package name: 2017-01-27-#107464-operation-java
- Package creation date: 2017-01-27 13:43:50
- Deployed at: 2017-01-27 14:44:42
- Package description: fixed filter for ordertype in material requirement list

Package content:

Name	Type	Version
DomSvc.Operation	DOMAIN	1.28.STD.22143
thirdpartylibs	THIRD_PARTY_LIBS	

Figure 13: Undeployment of WSP Packages

Maintenance Manager 2.0.2623

Update

Activate

Current versions

Package administration

Settings

System administration

Logout

WSP packages

MOC packages

Order	Package name	Deployed at	
1	MW30-client	2016-12-14 09:58:03	Delete
2	2016-12-20_ResourceConfiguration_Client_Apps_1.14.51538-client	2016-12-20 16:29:06	Undeploy
3	2016-12-20_BOResource_Client_Apps_1.14.51536-client	2016-12-20 16:29:10	Deploy
4	2016-12-23_#106849-client	2016-12-23 11:49:42	Create UPD
5	2016-12-13_GraphicMachinery_Cust-client	2016-12-28 10:07:45	Download UPD
6	2016-12-27_STOR_U_STOR_PerformanceProfile_Client_Apps_1.0.51638_Cust-client	2016-12-28 10:07:49	
7	2016-12-27_STOR_STOR_Resources_Client_Apps_1.0.51633_Cust-client	2016-12-28 10:07:54	
8	2016-12-27_STOR_RPPProductionReporting_Client_Apps_1.0.51618_Cust-client	2016-12-28 10:07:58	
9	2016-12-27_STOR_U_STOR_PerformanceReport_Client_Apps_1.0.51621_Cust-client	2016-12-28 10:08:01	
10	2017-01-10_#106576-client	2017-01-10 15:11:46	
11	2017-01-24_#107032-client	2017-01-27 08:20:21	

Figure 14: Undeployment of MOC Packages

After undeployment, you can completely delete the update package. That deletes the backup of the update package. If the user has undeployed the update package, then the button *Delete* can be selected. Via *Delete* the update package is completely removed from the system.

Maintenance Manager 2.0.6

Update

Activate

Current versions

Package administration

Settings

System administration

Logout

Server

Client

Order	Package name	Deployed at	
1	JavaMW30-NF-java	2016-05-25 08:16:15	Delete
2	test_hirs		Undeploy

Package name

test_hirs

Package creation date

2016-05-06 10:01:12

Deployed at

Package description

test_hirs

Package content

Name	Type	Version
CustHirsDomSvcU_HIRS_MdeBdeEfficiency	CUST_DOMAIN	3.3.HIRS.15542
thirdpartylibs	THIRD_PARTY_LIBS	

Figure 15: Delete server update packages

The screenshot shows the Maintenance Manager 2.0.6 interface. On the left is a sidebar with navigation links: Update, Activate, Current versions, Package administration, Settings, System administration, and Logout. The main area is titled 'Client' and contains a table with columns 'Order', 'Package name', and 'Deployed at'. A single row is visible with Order 1 and Package name 2016-04-27_201602239_FLEX_CUST-20160217_001_NL_Cust-client. To the right of the table are 'Delete' and 'Undeploy' buttons. Below the table, the details for the selected package are shown: Package name (2016-04-27_201602239_FLEX_CUST-20160217_001_NL_Cust-client), Package creation date (2016-04-27 07:30:08), Deployed at (empty), Package description (FLEX_ForemansChecklist_Client_Apps_1.2.45958), and Package content (a table with Name: ForemansChecklist and Version: 1.2.FLEX.45958).

Order	Package name	Deployed at
1	2016-04-27_201602239_FLEX_CUST-20160217_001_NL_Cust-client	

Package name: 2016-04-27_201602239_FLEX_CUST-20160217_001_NL_Cust-client

Package creation date: 2016-04-27 07:30:08

Deployed at:

Package description: FLEX_ForemansChecklist_Client_Apps_1.2.45958

Package content:

Name	Version
ForemansChecklist	1.2.FLEX.45958

Figure16: Delete client update packages

1.5.2 Creating update packages

You can combine and download update packages that have already been installed. For example, you can then install the packages in another system.

Select the update packages and click the function *Create UPD*. Use the function *Download UPD* to download the generated update package.

Generate separately the update package for the web service provider (WSP) and the update package for the MOC. To copy a system, you must generate a WSP package and an MOC package, both including all update packages, and install them all in the new system.

1.5.3 Activating the software status

Menu item: Activate

During the activation of the local runtime structure, all libraries are gathered into one web application. This application is activated in the Tomcat (if the application is already available, the old one is removed and replaced with the new one).

Then the files are automatically activated in JHYDRADIR.

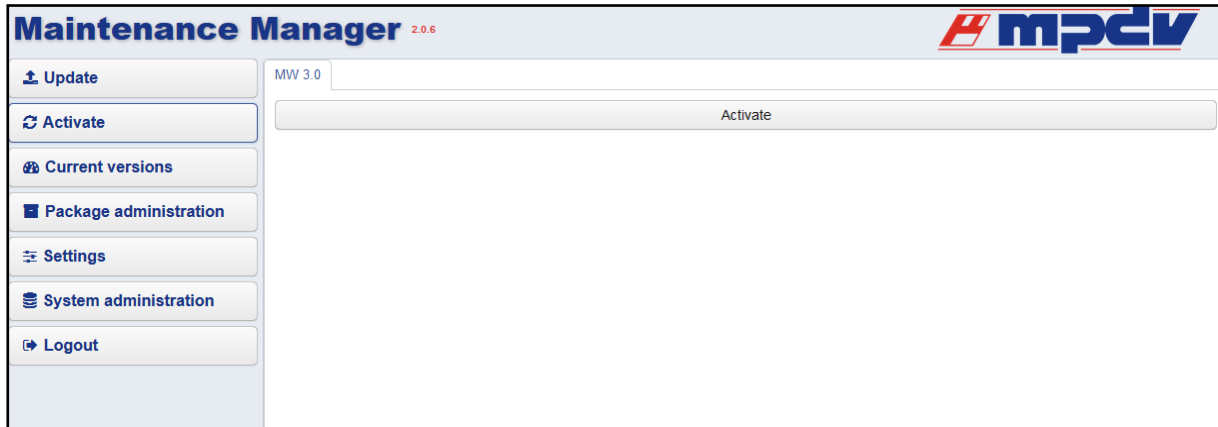


Figure 17: Activation of the software status

Use the button *Activate*.

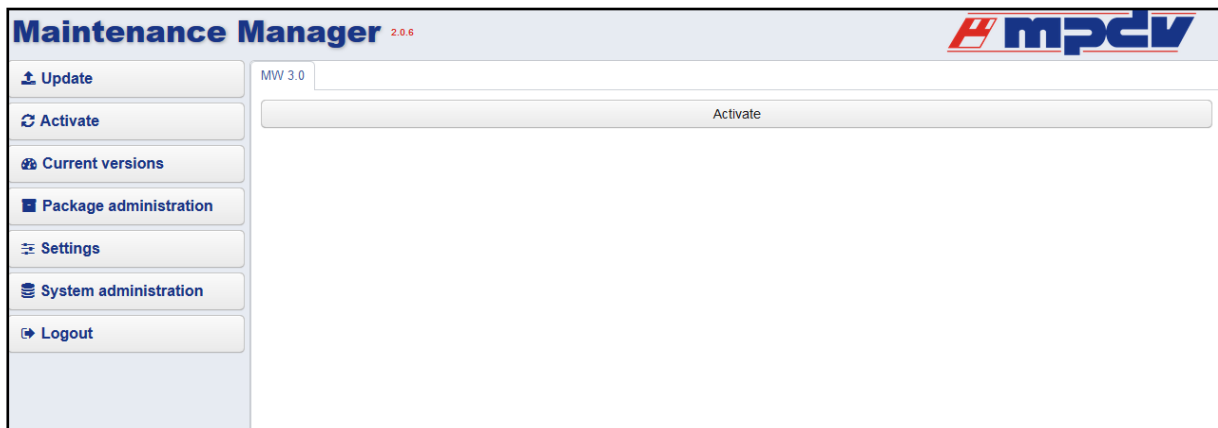


Figure 18: Activation update packages

The activation takes approx. 3-5 minutes and is then confirmed.

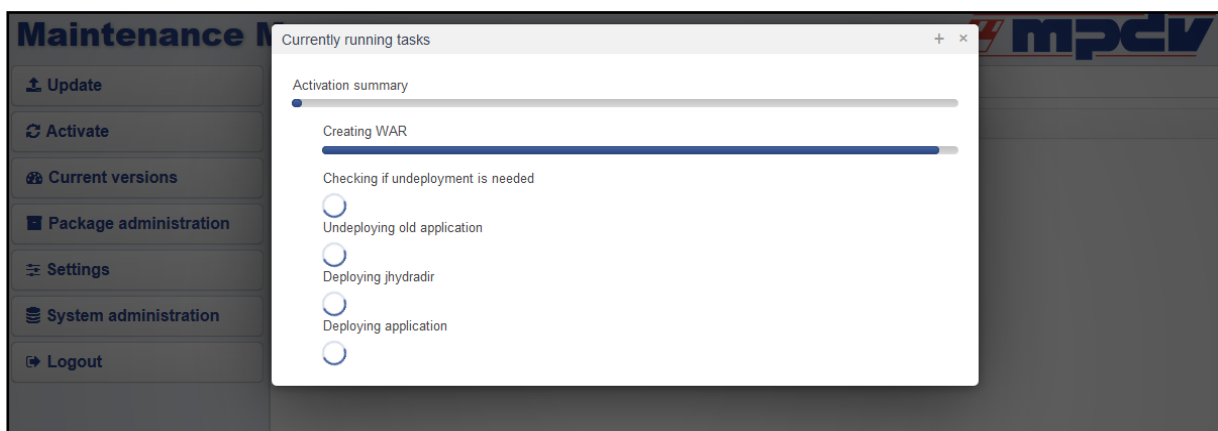


Figure 19: Progress during update

When using Tomcat 6, the activation might be interrupted if the server is overloaded due to an increased number of activation processes. In this case, an error message occurs. Any other activations are only available after a restart.

1.6 Other functions

1.6.1 Request version of the Java components

Menu item: **Current versions** → **WSP versions**

The version request provides the following data:

- Component name
- Component title
- Component version
- Supplier (vendor) of the component
- Modified on (date of component change)

Maintenance Manager 2.0.2623

Update

Activate

Current versions

Package administration

Settings

System administration

Logout

WSP versions

MOC versions

File name	Title	Version	Vendor	Change date
commons-email-1.4.jar	Apache Commons Email	1.4	The Apache Software Foundation	
MpdvCagHistogram.jar	CagHistogram	1.3.STD.15439	MPDV Mikrolab GmbH	06/03/2015 01:30 PM
MpdvCommonContractsPort.jar	CommonContractsPort	1.4.STD.21287	MPDV Mikrolab GmbH	11/11/2016 02:43 PM
MpdvCommonDigMapperPort.jar	CommonDigMapperPort	1.0.STD.19225	MPDV Mikrolab GmbH	05/09/2016 02:19 PM
MpdvCommonLoggerCorePort.jar	CommonLoggerCorePort	1.0.STD.13322	MPDV Mikrolab GmbH	11/14/2014 10:00 AM
MpdvCommonPdvUtilPort.jar	CommonPdvUtilPort	1.0.STD.17404	MPDV Mikrolab GmbH	11/12/2015 10:28 AM
MpdvCommonResultTransformerPort.jar	CommonResultTransformerPort	1.3.STD.19226	MPDV Mikrolab GmbH	05/09/2016 02:19 PM
MpdvCommonRhinoLib.jar	CommonRhinoLib	1.0.STD.15287	MPDV Mikrolab GmbH	05/13/2015 11:32 AM
MpdvCommonServiceDomainParser.jar	CommonServiceDomainParser	1.2.STD.15224	MPDV Mikrolab GmbH	05/13/2015 10:19 AM
MpdvCommonSqlGeneratorPort.jar	CommonSqlGeneratorPort	1.2.STD.15227	MPDV Mikrolab GmbH	05/13/2015 10:20 AM
MpdvCommonSqlSelectServiceInterpreter2Port.jar	CommonSqlSelectServiceInterpreter2Port	1.4.STD.19227	MPDV Mikrolab GmbH	05/09/2016 02:19 PM
MpdvCommonTntPort.jar	CommonTntPort	1.5.STD.21251	MPDV Mikrolab GmbH	11/09/2016 04:38 PM
MpdvCommonTransformationTypeManagerPort.jar	CommonTransformationTypeManagerPort	1.4.STD.17786	MPDV Mikrolab GmbH	12/03/2015 02:24 PM
MpdvCommonUtilPort.jar	CommonUtilPort	1.5.STD.17387	MPDV Mikrolab GmbH	11/12/2015 10:23 AM
MpdvCommonWorkflowCore.jar	CommonWorkflowCore	1.1.STD.15231	MPDV Mikrolab GmbH	05/13/2015 10:20 AM
commons-collections-3.2.1.jar	Commons Collections	3.2.1	The Apache Software Foundation	
commons-compress-1.4.jar	Commons Compress	1.4	The Apache Software Foundation	
commons-net-ftp-2.0.jar	Commons Net	2.0	The Apache Software Foundation	
MpdvCustJaeDomCoreFctMapping.jar	CustJaeDomCoreFctMapping	1.0.JAE.21745	MPDV Mikrolab GmbH	12/20/2016 04:40 PM
MpdvCustSbauDomSvcEfficiencyReport.jar	CustSbauDomSvcEfficiencyReport	1.0.SBAU.21709	MPDV Mikrolab GmbH	12/15/2016 11:11 AM
MpdvCustStorDomSvcBOResource.jar	CustStorDomSvcBOResource	1.0.STOR.21696	MPDV Mikrolab GmbH	12/13/2016 01:34 PM
MpdvCustStorDomSvcProductionReporting.jar	CustStorDomSvcProductionReporting	1.0.STOR.21778	MPDV Mikrolab GmbH	12/21/2016 05:03 PM
MpdvDomCoreBusinessService.jar	DomCoreBusinessService	1.47.STD.22121	MPDV Mikrolab GmbH	01/27/2017 11:17 AM
MpdvDomCoreCagHistogram.jar	DomCoreCagHistogram	MOC-MW30.svn-r	MPDV Mikrolab GmbH	08/15/2011 10:35 AM


Figure 20: Version information WSP

A comparison of versions provides the same data for the versions in the runtime structure and for active versions.

1.6.2 Request version of the client components

The version request provides the following data:

- Component name
- Component title

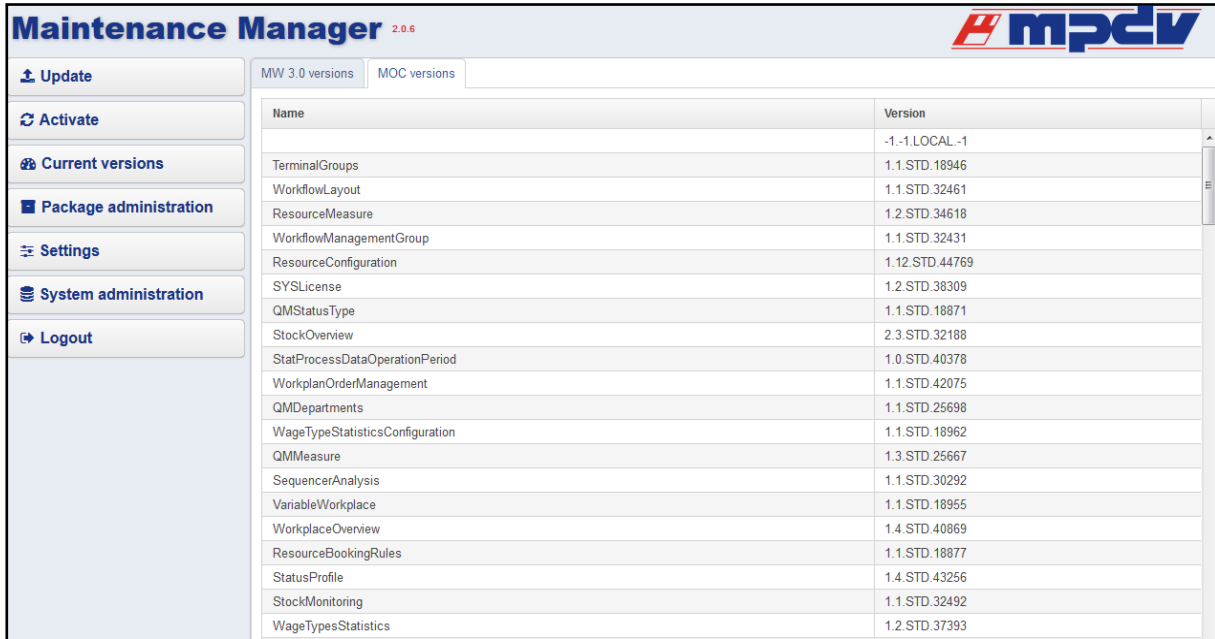


Name	Version
	-1.-1.LOCAL.-1
TerminalGroups	1.1.STD.18946
WorkflowLayout	1.1.STD.32461
ResourceMeasure	1.2.STD.34618
WorkflowManagementGroup	1.1.STD.32431
ResourceConfiguration	1.12.STD.44769
SYSLicense	1.2.STD.38309
QMStatusType	1.1.STD.18871
StockOverview	2.3.STD.32188
StatProcessDataOperationPeriod	1.0.STD.40378
WorkplanOrderManagement	1.1.STD.42075
QMDepartments	1.1.STD.25698
WageTypeStatisticsConfiguration	1.1.STD.18962
QMMeasure	1.3.STD.25667
SequencerAnalysis	1.1.STD.30292
VariableWorkplace	1.1.STD.18955
WorkplaceOverview	1.4.STD.40869
ResourceBookingRules	1.1.STD.18877
StatusProfile	1.4.STD.43256
StockMonitoring	1.1.STD.32492
WageTypesStatistics	1.2.STD.37393

Figure 21: Version information MOC

1.6.3 Administration

Menu item: System administration → Path configuration

The menu point *System Administration* contains functions to maintain HYDRA paths and to manage logged users. This area of the application requires access data of a HYDRA user.

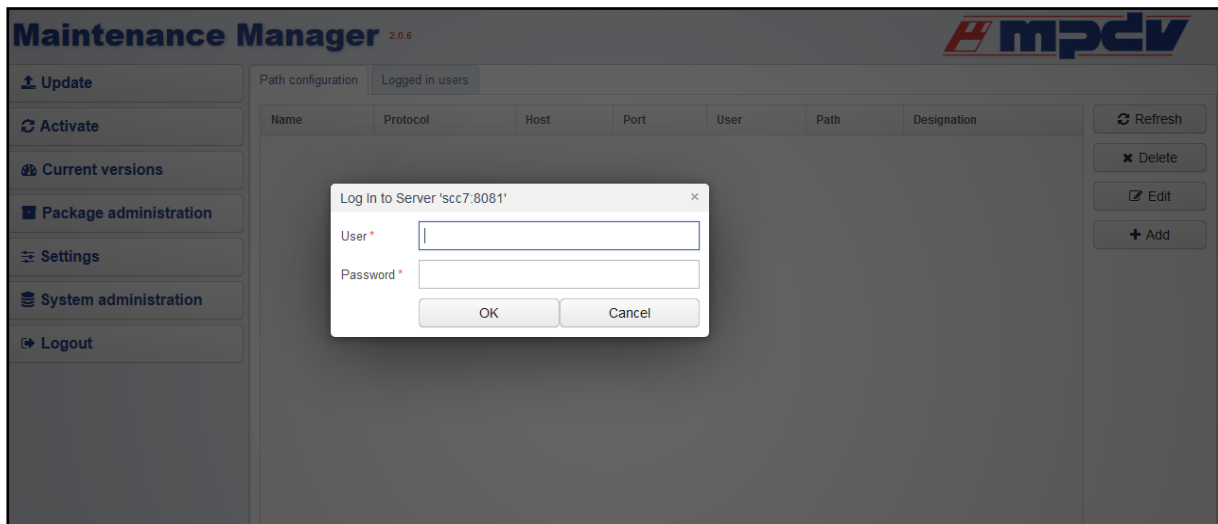

1.6.3.1 Editing HYDRA paths

Use the *Path configuration* of the Maintenance Manager to view, create, edit, delete, and copy HYDRA paths. In the path configuration of the Maintenance Manager, you can edit the same fields as in the HYDRA path configuration. The *HYDRA Documentation* can be used to describe the values.

Menu item: **System administration** → **Path configuration**

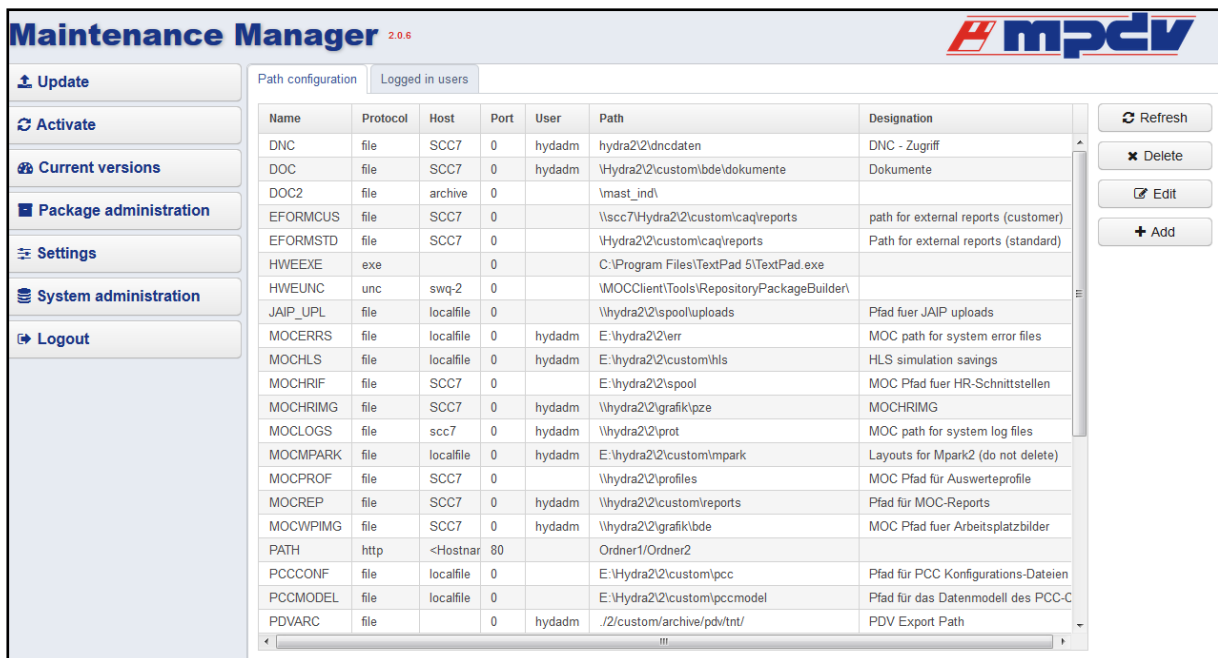


Figure 22: Maintenance of HYDRA paths

1.6.3.2 Administration of logged in users

Menu item: **System administration** → **Logged in users**

Open the administration of logged in users to lock other users in the current Maintenance Manager.

Login by	Device ID	Last active	Login time	Session ID
12345	MH-WS-04	2016-05-25 09:18:52	2016-05-25 08:44:59	b290c7c7-700a-4834-9f2e-9eabd6590e39
12345	MM2	2016-05-25 09:23:17	2016-05-25 09:23:17	3181efa3-61e6-4933-a78d-b6c1dc10e4a1
12345	SIE-NB-04	2016-05-25 09:18:52	2016-05-25 06:41:23	aaec06af-6720-4a7d-bb71-39318d142c6d
12345	TTH-NB-01	2016-05-25 09:21:37	2016-05-25 09:21:37	b159d03d-0fe4-4ace-b63e-eddbfec10007
12345	SFR-NB-01	2016-05-25 09:18:52	2016-05-25 09:06:34	cf00fde5-1fde-44d1-87af-9835be24b817

Figure 23: Administration of logged in users

Click *Logout* to log off the selected users. You can select multiple users (CTRL + mouse click).

Logout all logs off all users logged in.

A confirmation prompt is displayed for both functions.

Figure 24 Confirmation prompt



Use this icon and table to document notes (template).



Use this icon and table to document warnings (template).



... is only available if the extension [<<Authorization key>>](#) is activated.