

Manual

eReportManager SIS-ERM 4.0_{pe}

Version 1.0.23049

Last changed on: 12.06.2019

Copyright

©Copyright 2020 All rights reserved.

SAP® and R/3® are registered trademarks of SAP AG.

WINDOWS® is a registered trademark of Microsoft Corporation.

MPDV® and HYDRA® are registered trademarks of MPDV Mikrolab GmbH.

ORACLE® is a registered trademark of ORACLE Corporation, California, USA.

Copying and distribution of this documentation or any part thereof, for any purpose or in any form, is prohibited without prior written permission from MPDV Mikrolab GmbH.

The information contained in this documentation is subject to change without prior notice.

Contents

1	Overview eReportManager	4
2	Configuration E-Report Manager	5

1 Overview eReportManager

Purpose

HYDRA provides a service for central creation and distribution of reports.

This service can be used for all reports based on the MDS Report Builder.

All output formats provided by the report output can be generated, e.g. pdf, xls etc.

At fixed times, the report results may be

- saved within the file system
- output directly at a configured printer
- sent by e-mail to specific persons

The times for executing reports *can* be defined within the configuration dialog. In addition, the parameters to control the report can be specified (e.g. evaluation period, machine etc.).

Cyclic report generation has been implemented as service that has to be enabled on a Windows computer.

Implementation Notes

The function package is used where you wish to create cyclic reports

Integration

HYDRA Escalation Management is required for sending e-mails

E-mail recipients can be addressed by using the configuration options provided by Escalation Management. Logical groups of recipients may be defined.

For example, the e-mail addresses of production managers from three different production areas can be configured as logical recipient "production managers".

Features

The eReportManager includes

- configuration of cyclic report generation
- service for automatic report generation on a Windows server

2 Configuration E-Report Manager

Overview

Menu	System administration → System settings → Configuration E-Report manager
Transaction code	rbbj
Function authorization	rbbj

Purpose

The E-Report Manager is used for centrally controlled generating and distributing of reports.

You can define the following criteria in the application *Configuration E-Report manager*:

- Fixed times for the execution of reports
- Parameters to control the report (e.g. evaluation period, machine etc.)
- Output format
- Storage or dispatch by e-mail

Integration

- Make the reports available to the E-Report Manager (see section *Using reports for the E-Report manager*).
- You need the HYDRA Escalation Management to send e-mails.

Requirements

You require the HYDRA Escalation Management (licensed and activated) to send report results by e-mail.

Technical requirements

To use this function, the following requirements must be fulfilled:

- You need to activate/install the E-Report manager service in a Windows system.
- You require a .net 4.5.2 installation on the server where the E-Report manager service is running.

A standard HYDRA installation does not fulfill the above mentioned requirements. Perform a separate installation as instructed in the "SIS-ERM_30_installation" for the E-Report.

Procedure

- You can use time control to start report calls at fixed times. It is possible to start reports only on specific weekdays (e.g. only Monday and Friday).
- The report results are saved and sent to employees using the escalation management. The addressed employees receive the file as an e-mail attachment.

Selection criteria

The application provides the following selection criteria:

Report

Selects the report that you want to output

Active

Selects the active/inactive report outputs

Field definition

E-Report ID

Name of the report output (unique ID)

Report export

Selects created report configurations (only when creating/copying a configuration)

General

Type

Fixed:

runs at a fixed point in time

Interval:

runs at a defined interval

Active

Identifier showing if the report output is enabled

Report settings

Report

Assign a file name for the report **without a file extension (*.lul)**.

The report must be stored and exported on the server in order to use the report in the E-Report Manager. You can find details in the chapter „**Error! Reference source not found.**“.

Depending on the configuration of the paths on the server, the report file is located in the configured path MOCREP (e.g. \\MyServer\HYDRA3\3\custom\reports\MyTestReport.lul).

Application ID

Application the report belongs to.

You need this information to configure the required selection parameter.

User

User that runs the report. The system checks the responsibility area the HYDRA user is authorized for. The function authorization for the user have no effect in the E-Report Manager.

Language

Language used for the report.

Example:

- de-DE
- en-US

Report format

Format of the report → default = PDF

Further formats according to the output options provided in List & Label.

PDF, BMP, HTML, JPG, PNG, XPS, XLS, XLSX and XML. The display may differ for each output format. You must bear in mind and test the output format when you design a report. Common output formats are PDF and perhaps HTML.

Report output

Report file

File name (without extension)

You can add a defined identifier including the current date/time to the file name. This way, you can archive the reports.

`$today -> YYYY-MM-DD` Example: 2015-03-24

`$todayen -> MM-DD-YYYY` Example: 03-24-2015

`$todayde -> DD-MM-YYYY` Example: 24-03-2015

`$now -> hh-mm` Example: 12-05

`$nowss -> hh-mm-ss` Example: 12-05-55

Converted in the following order:

`$todayen -> $todayde -> $today -> $nowss -> $now`

Example:

Report_date_\$today_time_\$nowss → Report_date_2015-03-24_time_12-05-55.pdf

Report path

HYDRA path to save the file. In this field, you usually enter the configured path "PSREPORT".

The real path is configured in the HYDRA path configuration.



The server/computer including the installation of the E-Report service must be authorized to access the configured file path.

Printer

Printer name to print the generated file afterwards. The printer name refers to a printer in the server where the E-Report service has been installed.

To use a printer, ensure that the Windows user configured for the E-Report service can access a printer and has the authorizations. The system administrator knows the available printers. The system administrator installs the printers according to the installation instructions "SIS-ERM_30_installation" in the E-Report server. The document "SIS-ERM_30_installation" also describes how to test the printer configuration.

Fixed point in time

Hour, minute, day, month, weekday and year

Configures a fixed point in time to run the report.

All fields are connected by a logical AND relation. If fields are not populated, the value is not used and the action is executed again and again.

For example, to run a report EVERY day at 8 am, you must populate the fields "hour" and "minute". The other fields remain empty and are ignored.

Interval

Interval

Configures an interval to run the report

From, to

Report is executed at the specified interval between these events.

Escalation

Subject

Subject of the e-mail to be sent.

Active

Indicator showing whether or not an e-mail dispatch (i.e. triggering the escalation) is required. If this option is checked, the parameters from the configuration of the E-Report manager are taken over into the escalation management.

Function

The function group the e-mail is sent to.

Person

Person the e-mail is sent to. To this end, you must store an e-mail address in the HR master data in the field Company e-mail.

Text

Message text (text of the mail).

Parameter

Parameter

After creating the configuration, you can set in the editing dialog all values of the selection panel of the mask that calls the report.

The parameters (data of the selection panel) therefore define the data included in the report.

Note:

If you want to run a report and output the data in a relative manner (e.g. using the data of the previous day), you must configure the field in the selection panel of the dialog as relative date field.

Toolbar

Test report

Using this function, the print server immediately performs the selected E-Report configuration. The configured time or interval is ignored. If you have configured a printer or an e-mail dispatch, these features are included when you test the report.

If the e-mail is not dispatched during the test, disable the e-mail dispatch in the E-Report configuration in the *Escalation* tab before running the test.

You can define a printer in the E-Report configuration. The printer must be accessible by the print server service.

Report files are loaded from the server.

Using reports for the E-Report manager

In order to use reports for the E-Report Manager, the reports must first be stored on the server and then be exported to the MOC with the **MES Development Suite** activated.

1. Activate the „MES Development Suite“.
2. Open your report in the application that includes your report - ReportConfiguration.
3. Select the required report and call the function *Edit*.
4. Activate the option "Save on server".

5. Execute the "Export" function.
6. Close the ReportConfiguration with OK.

The report is stored on the server in the path "MOCREP". The export files are stored in the HYDRA path "PSLLXML" and are then available to the E-Report Manager.



If changes are made to the report or to the data sources, you must execute a new export.

Restriction of reports in application configuration

Default values for the configuration of data sources.


The configuration of *Default values* in the function *Configure data source* used for reports in the E-Report Manager, is not supported.

If you want to use a report in the E-Report Manager, add a field for the selection parameter to the *Selection Panel* instead of *Default values* in the configuration of the data source. You can assign a value to the selection field in the E-Report Manager.


Sample E-Report configuration

We use the report *Maintenance plan* of the application *Activity calendar* as an example. You must first of all enable the *MES Development Suite* to export the report and then open the activity calendar. You can use the transaction code "rmcal" to open the *Activity calendar*.

Request data in the open application. Once data is available, open the report configuration.

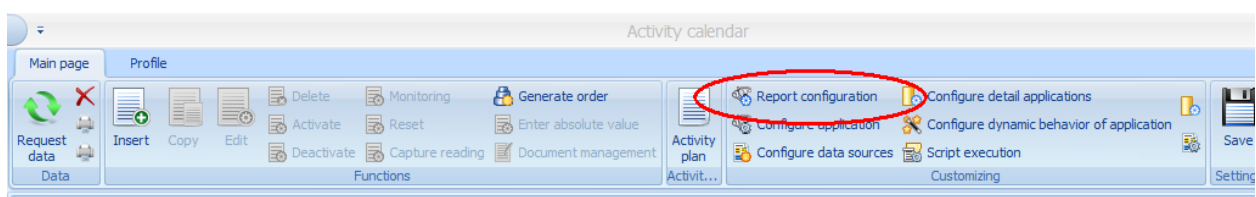


Select the report "Maintenance plan" in the dialog and click the button *Edit*.

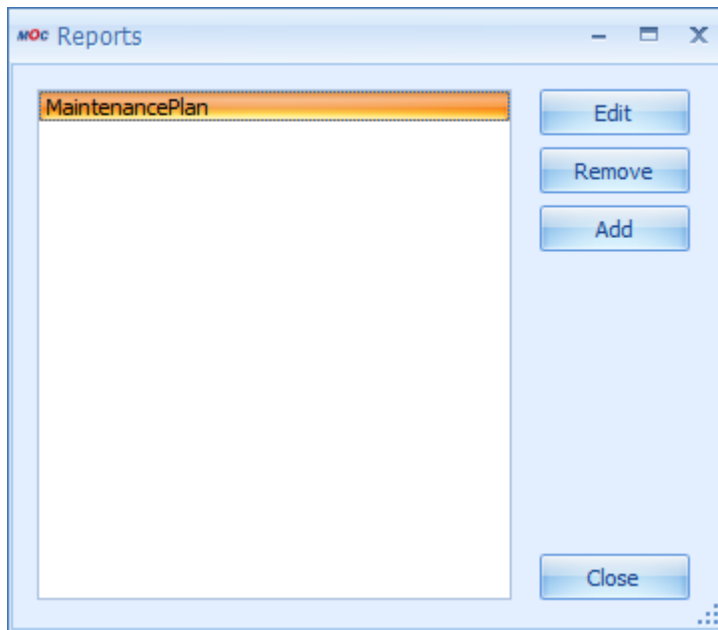


Then the dialog ReportConfiguration opens.

1. Select the report and call the "Edit" function.
2. Activate the option "Save on server".
3. Execute the "Export" function.
4. Close the ReportConfiguration with OK.


A prompt confirms the successful export.

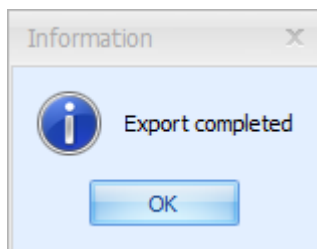

The export of the report configuration is stored in the HYDRA server according to the path configuration PSLLXML. In the example, the following file is saved after the export using the configured path PSLLXML:

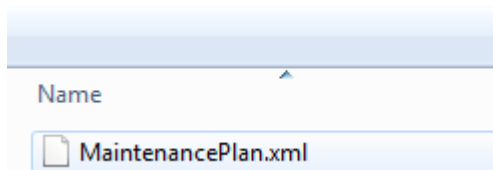


Create a new E-Report. As it is an example, assign the E-Report ID *Example*. Via the selection *Report Export*, select the previously exported report configuration.

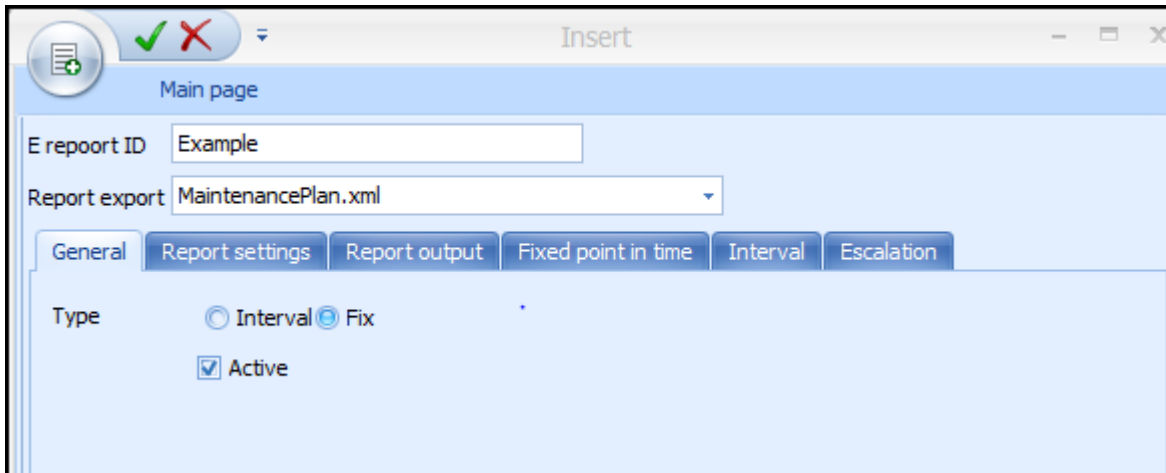

The screenshot shows the 'Insert' dialog box with the 'General' tab selected. The 'E report ID' field is set to 'Example'. The 'Report export' dropdown menu is set to 'MaintenancePlan.xml'. Under the 'Type' section, the 'Interval' radio button is selected, and the 'Active' checkbox is checked.

In tab *General*, set the type to *Fix* and the E-Report configuration to *Active*.


Configure the tab *Report settings* according to the used report configuration and its origin.

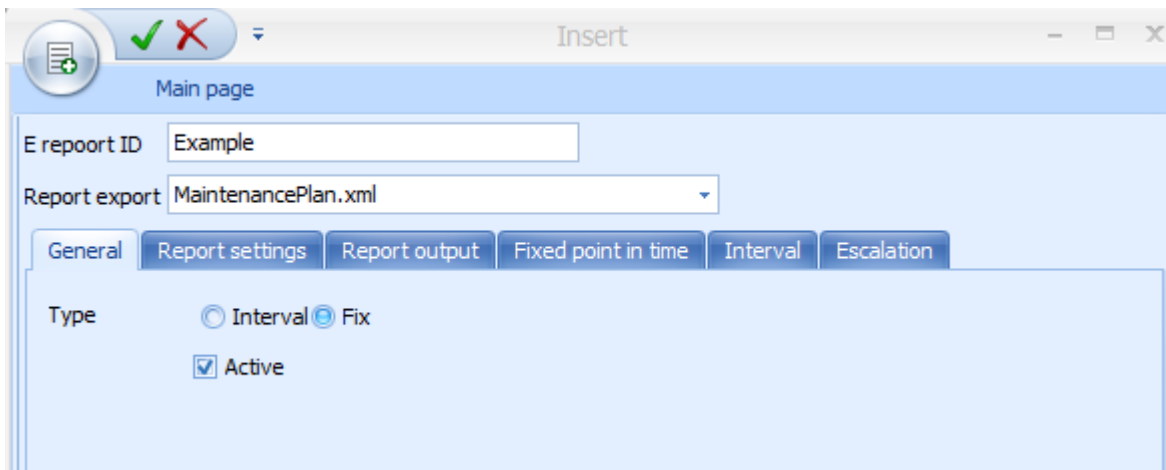

This screenshot is identical to the one above, showing the 'General' tab of the 'Insert' dialog box. The 'E report ID' is 'Example', 'Report export' is 'MaintenancePlan.xml', 'Interval' is selected under 'Type', and 'Active' is checked.

- Here, the *MaintenancePlan* is the report whose configuration was exported (see above).
- The *MaintenanceCalendar* is the application ID used to create the report configuration. In this example, it is the ID of the application *Activity calendar*. Use the MES Development Suite and the function *Configure application* to identify the application ID.
- Refer to the descriptions above for information on the functioning of the other fields.

In tab *Report Output*, only enter the file name of the report you want to create:

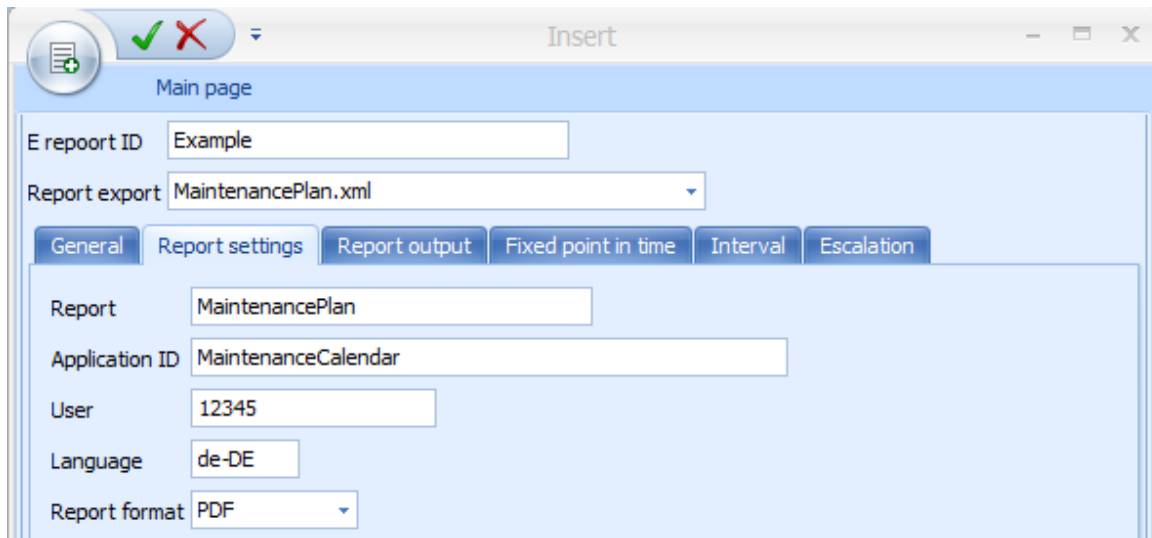

Insert

Main page

E report ID: Example

Report export: MaintenancePlan.xml

General | Report settings | Report output | Fixed point in time | Interval | Escalation

Report: MaintenancePlan

Application ID: MaintenanceCalendar

User: 12345


Language: de-DE

Report format: PDF

According to the configuration, PSREPORT should be predefined as report path. It is possible, but not recommended to change the path.

Depending on the configuration in tab *General*, you only need to configure tab *Fixed point in time* or *Interval*. To configure the e-mail dispatch, use tab *Escalation*.

Once you have created the E-Report configuration, you can run a test. Use the button *Test report*. In the example, the report is generated in PDF format. This test is used to check the configured selection parameters. You can change the selection parameters of the report using the function *Edit*. Here, you can edit the E-Report configuration and also the selection parameters for the report generation.

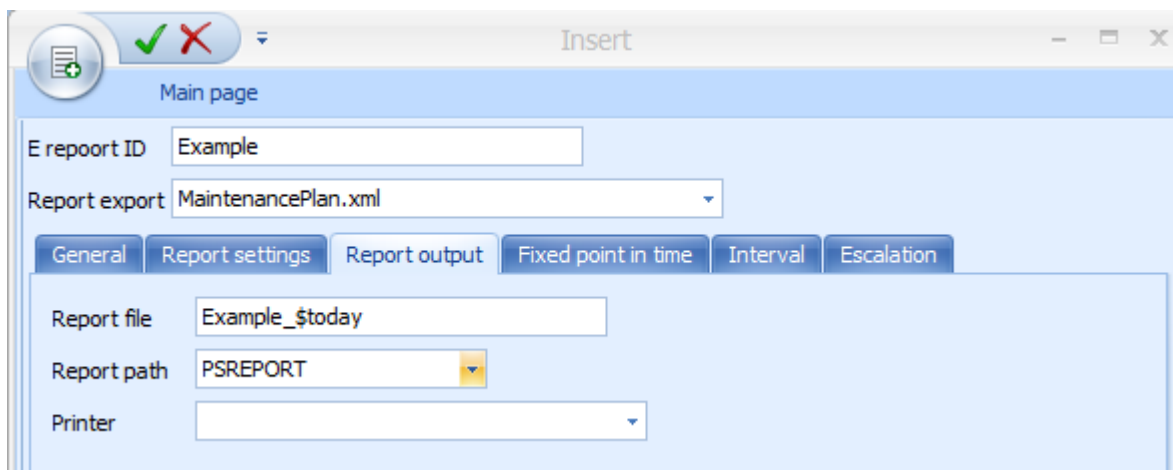

Insert

Main page

E report ID: Example

Report export: MaintenancePlan.xml

General | Report settings | Report output | Fixed point in time | Interval | Escalation

Report file: Example_<today>

Report path: PSREPORT

Printer:

Troubleshooting

Due to the complex relationships between the MOC, the HYDRA server and the print server, malfunctions can occur. Malfunctions can affect the export of reports, the E-Report configuration and the test of reports, if the settings and configurations made during the installation are not correct or not correct any more.

Among others, the following configurations and settings are made on installing the E-Report manager:

- The HYDRA paths PSREPORT and PSLLXML are created, if not yet available. The path MOCREP is checked. These paths are required to export report files, to use the files in the E-Report manager and to save the created reports.
- An *escalation configuration* is created for the event ESK.MESSAGE, if not yet available. This configuration is required to send reports by mail.
- An INI configuration including the address of the E-Report server is created. This INI configuration is required to test reports. Using this address, the print server is triggered to immediately create the report during the test.
- In the E-Reporting server, the printers are configured and the services set up.

If problems occur during configuration, test or application of the E-Report manager, check all configuration steps included in the installation instructions "SIS-ERM_30_installation".