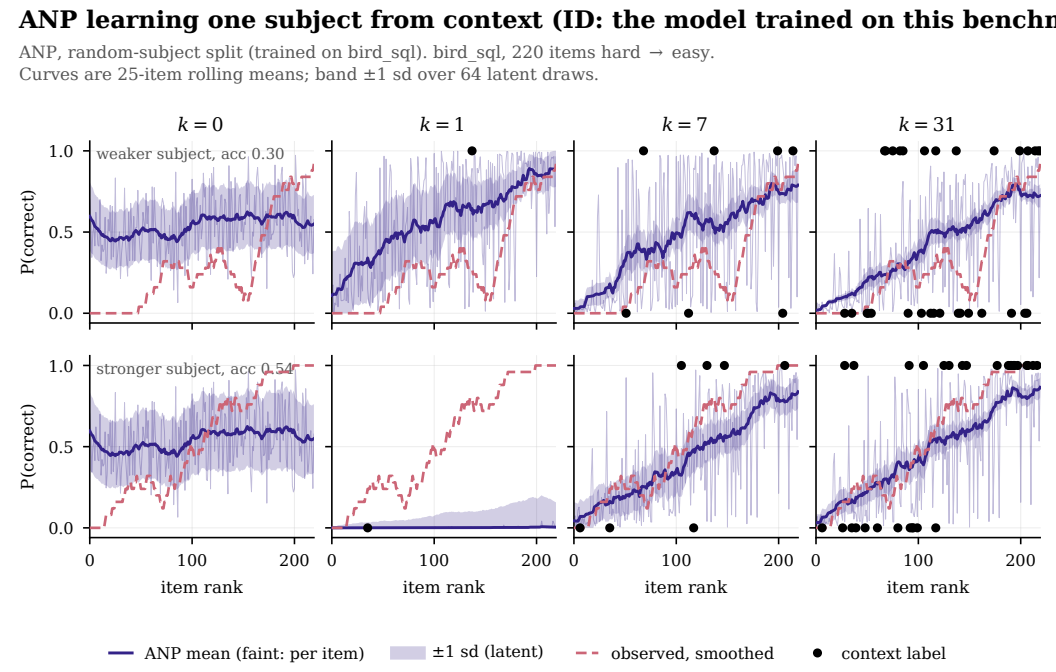
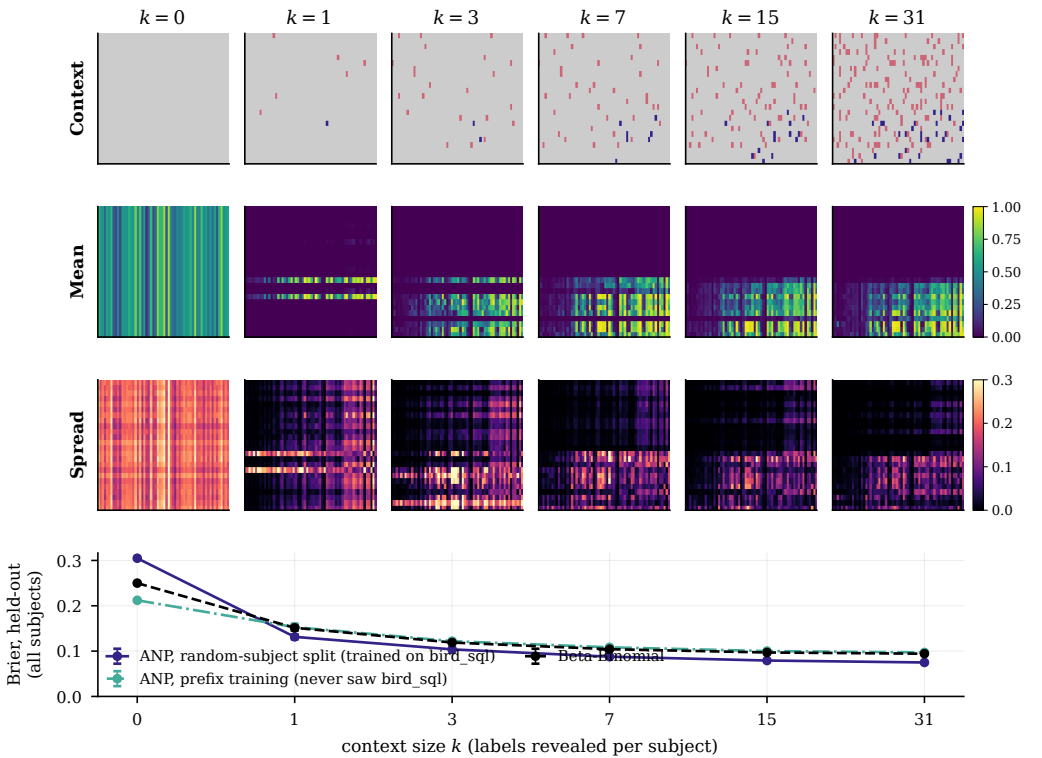
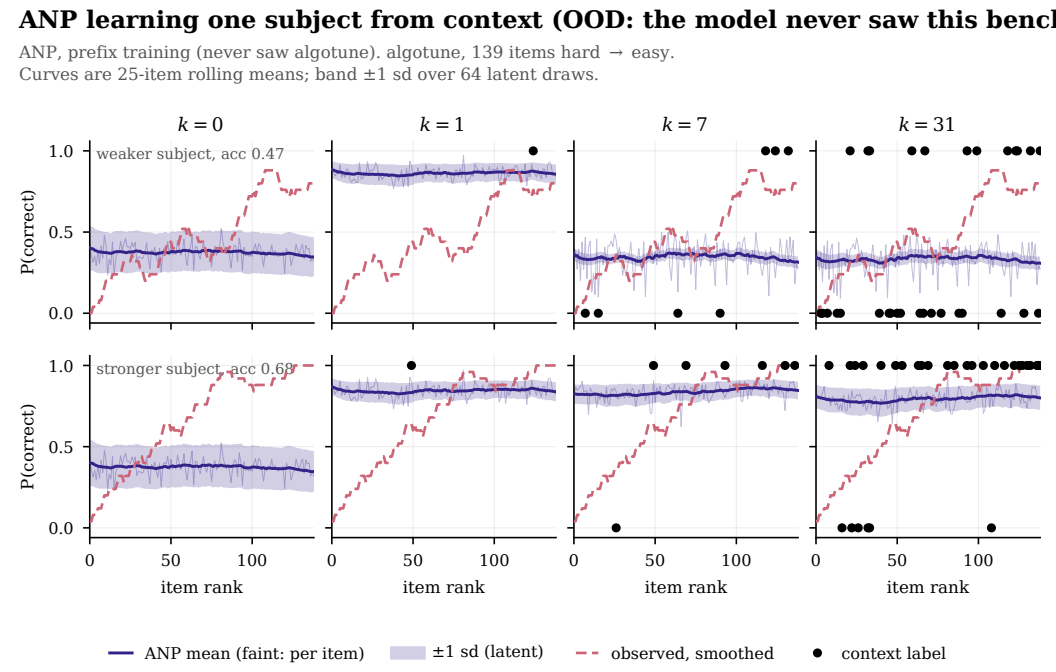

ANP learning one subject from context (ID: the model trained on this benchm
ANP, random-subject split (trained on bird_sql). bird_sql, 220 items hard → easy.
Curves are 25-item rolling means; band ±1 sd over 64 latent draws.
k = 0
k = 1
k = 7
k = 31
weaker subject, acc 0.30
stronger subject, acc 0.54
P(correct)
1.0
0.5
0.0
0
100
200
item rank
ANP mean (faint: per item)
±1 sd (latent)
observed, smoothed
context label

Response-matrix completion by the ANP (ID: the model trained on this bench

bird_sql: 24 subjects (weak → strong) x 60 items (hard → easy). Random context order; grey = unrevealed.




ANP learning one subject from context (OOD: the model never saw this bench
ANP, prefix training (never saw algotune). algotune, 139 items hard → easy.
Curves are 25-item rolling means; band ±1 sd over 64 latent draws.
k = 0
k = 1
k = 7
k = 31
weaker subject, acc 0.47
stronger subject, acc 0.68
P(correct)
1.0
0.5
0.0
0
50
100
item rank
ANP mean (faint: per item)
±1 sd (latent)
observed, smoothed
context label

Response-matrix completion by the ANP (OOD: the model never saw this ben

algotune: 18 subjects (weak → strong) x 60 items (hard → easy). Random context order; grey = unrevealed.

