


Current-package example: true M = 5
MPCurver 0.3.4 auto-M adaptive fit; SNR = 4, replicate 1; initial M = 5, effective M = 5.

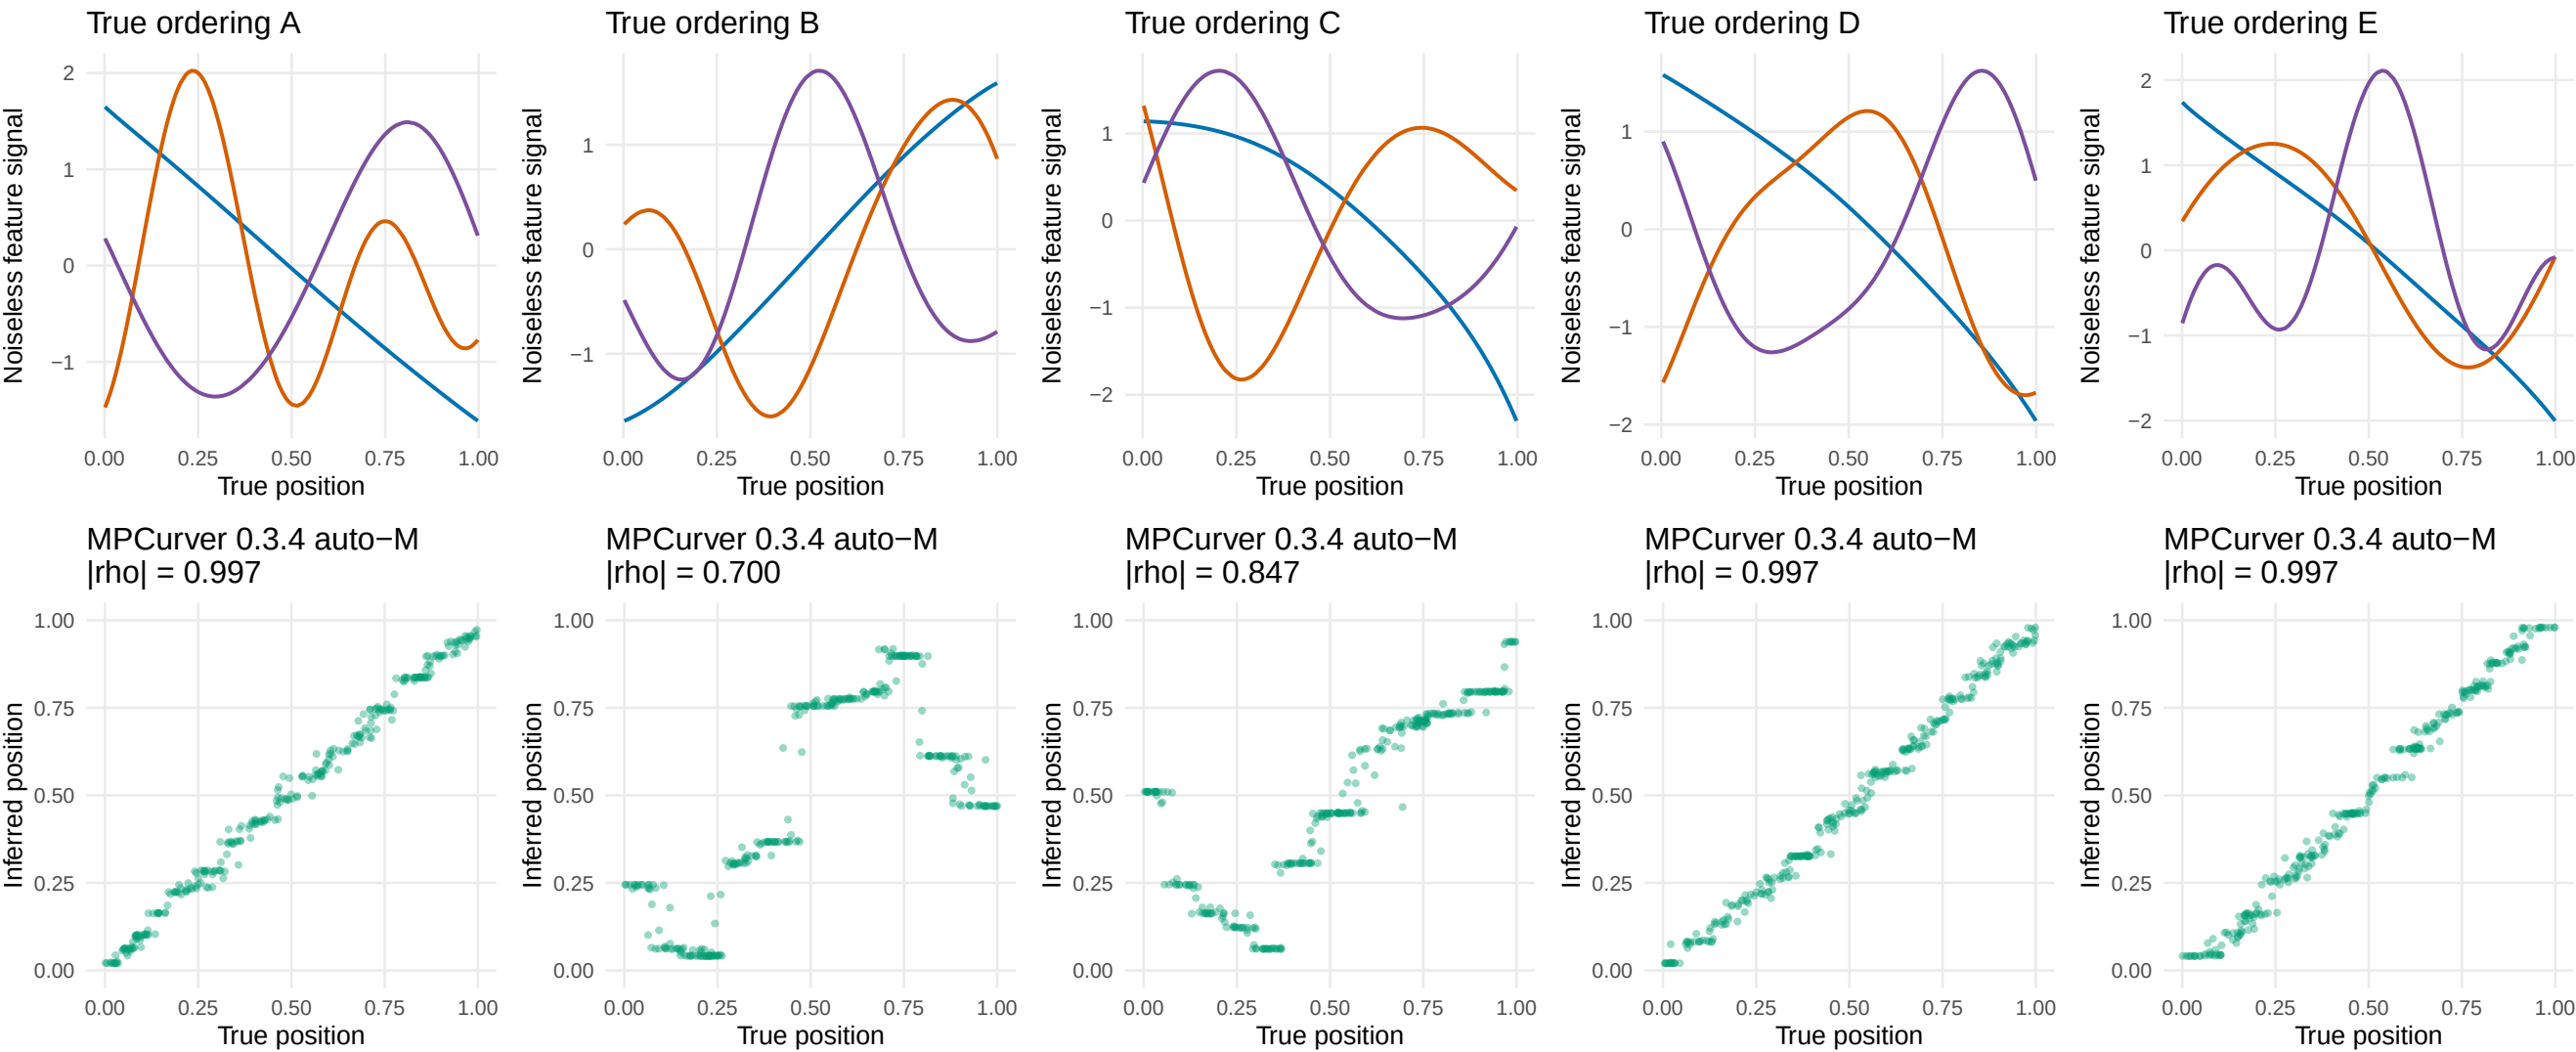

Top row: one monotone anchor (blue) and two nonmonotone smooth trajectories per true ordering.
Bottom row: one-to-one matched inferred positions, with reversal allowed.