


Ordering B: Isomap initialization and final MPCurve ordering

Rows: multiplier of the original B noise; columns: Isomap neighbors. Other feature groups and fitting controls are fixed.

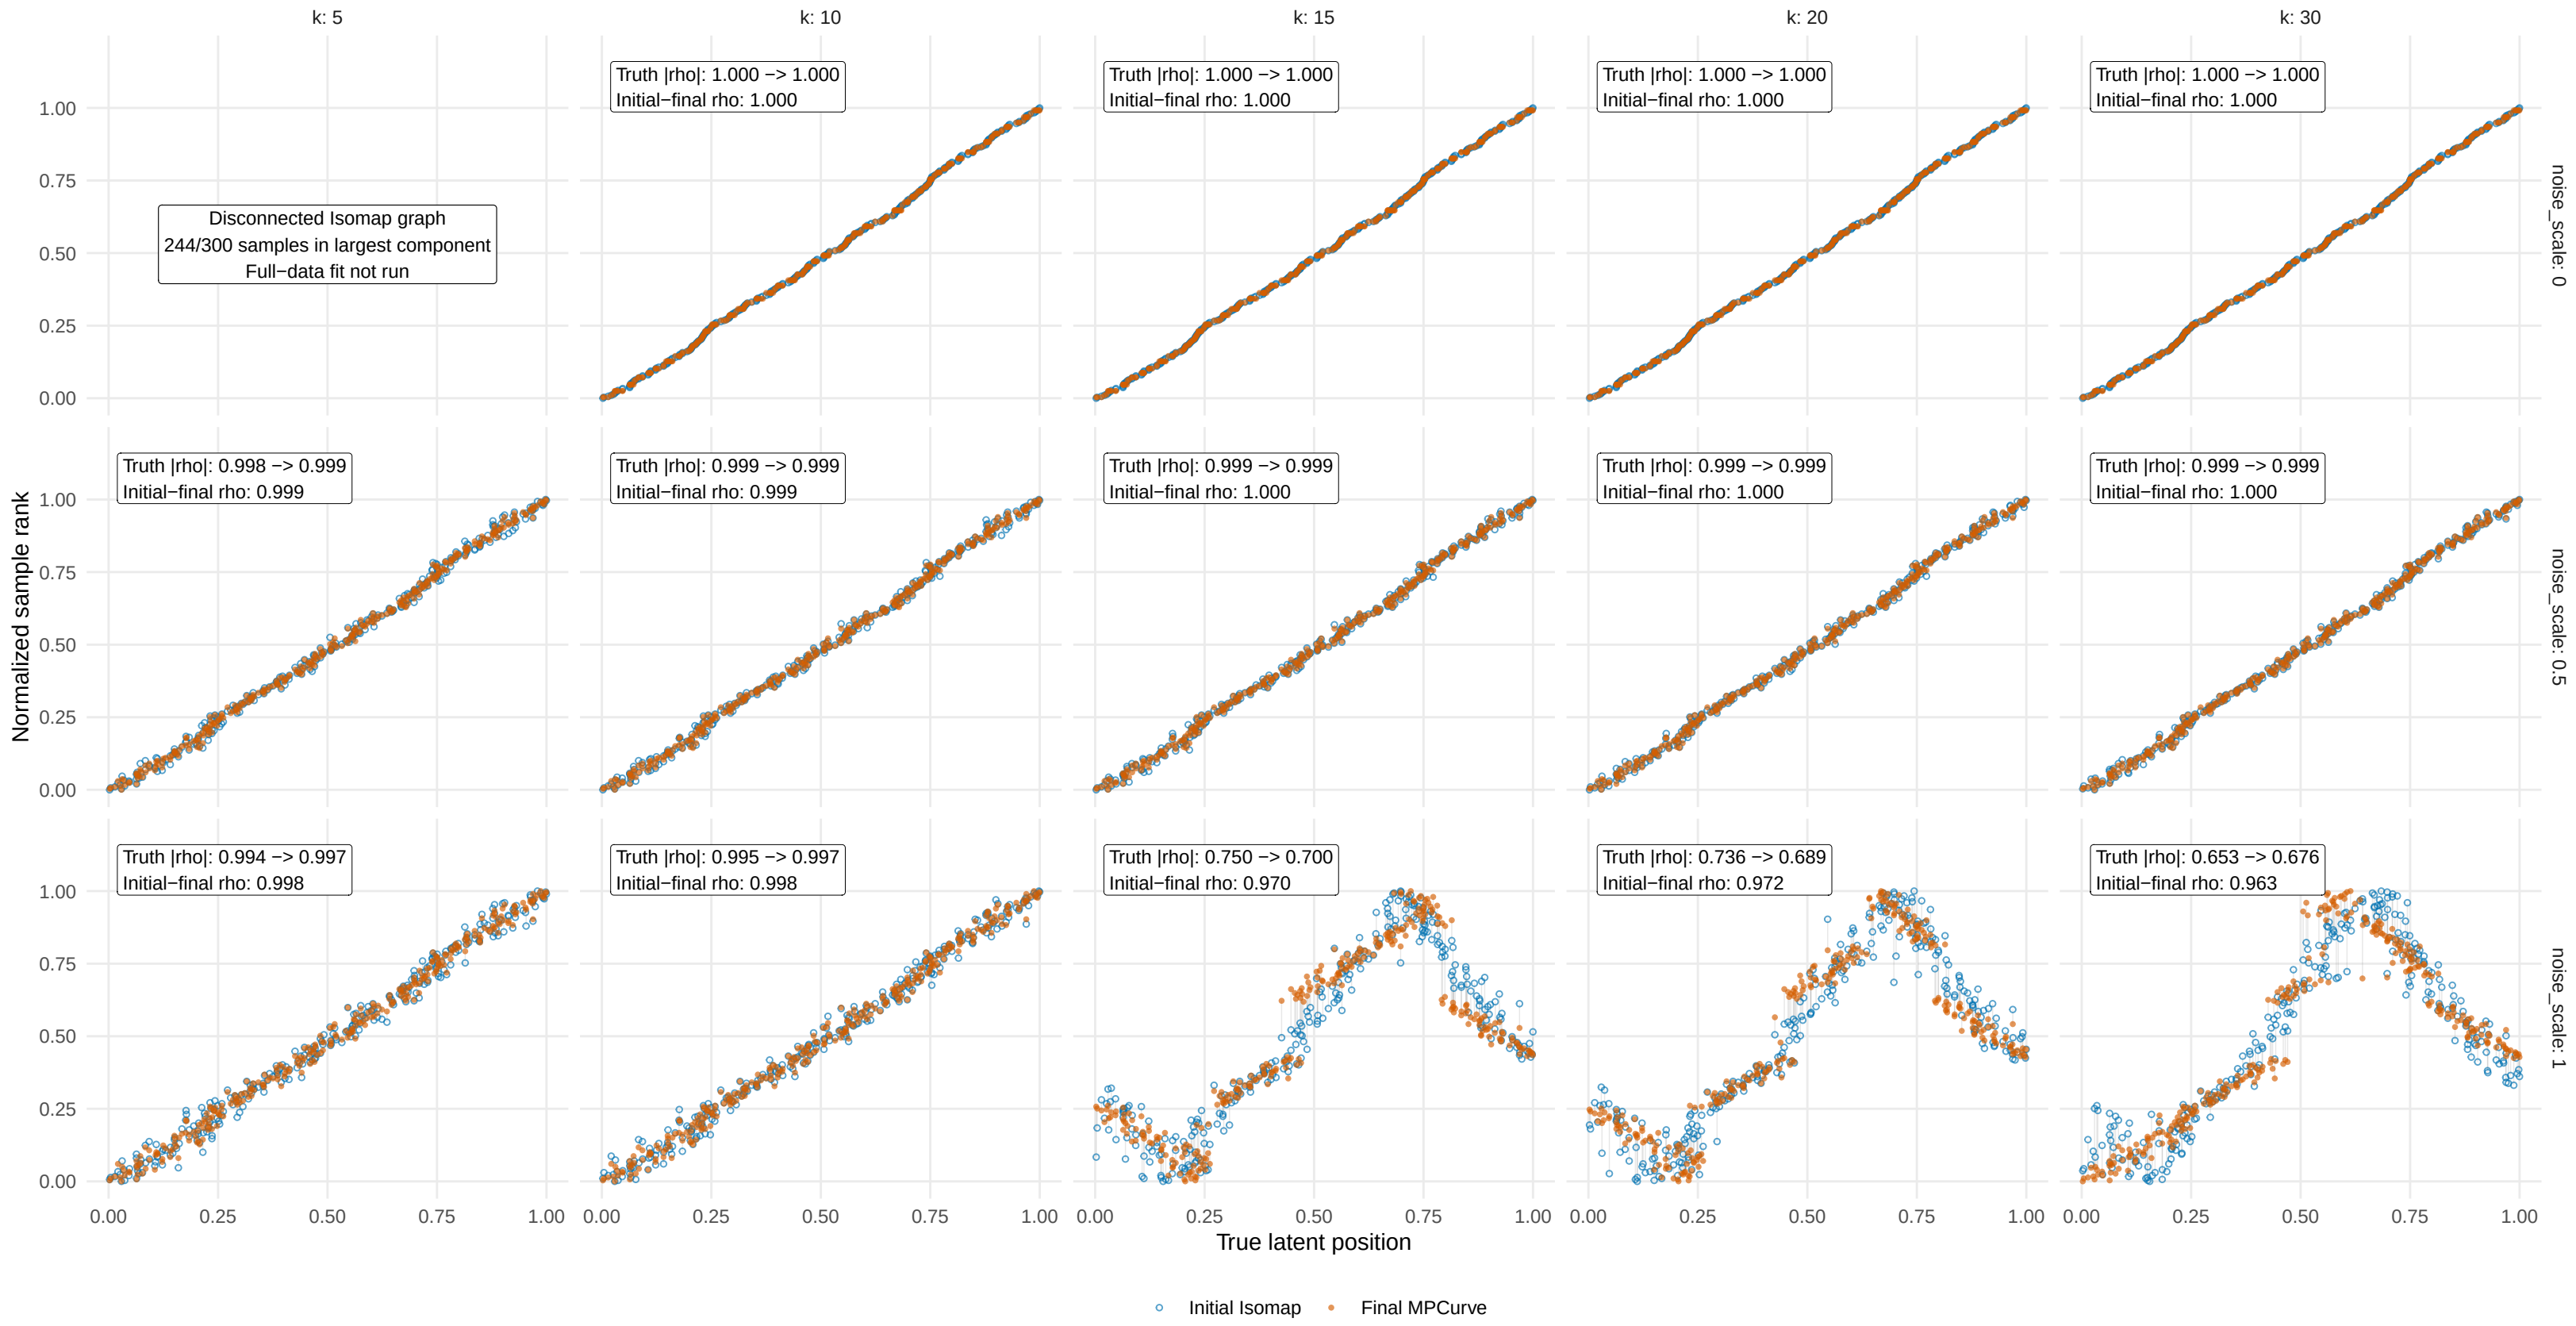

Blue open circles: raw Isomap ranks; orange dots: final posterior-mean ranks.
Gray segments connect the same sample before and after iteration.
Ranks remove coordinate-spacing differences; average ranks are used for ties. Global reversal is aligned away.
Each fit uses M=5 and the original feature groups for initialization; subsequent feature assignments and priors are learned.