


# Ordering B: PCA and Isomap under the same three noise settings

Only B initialization differs between methods; each panel overlays the initial and final sample ordering.

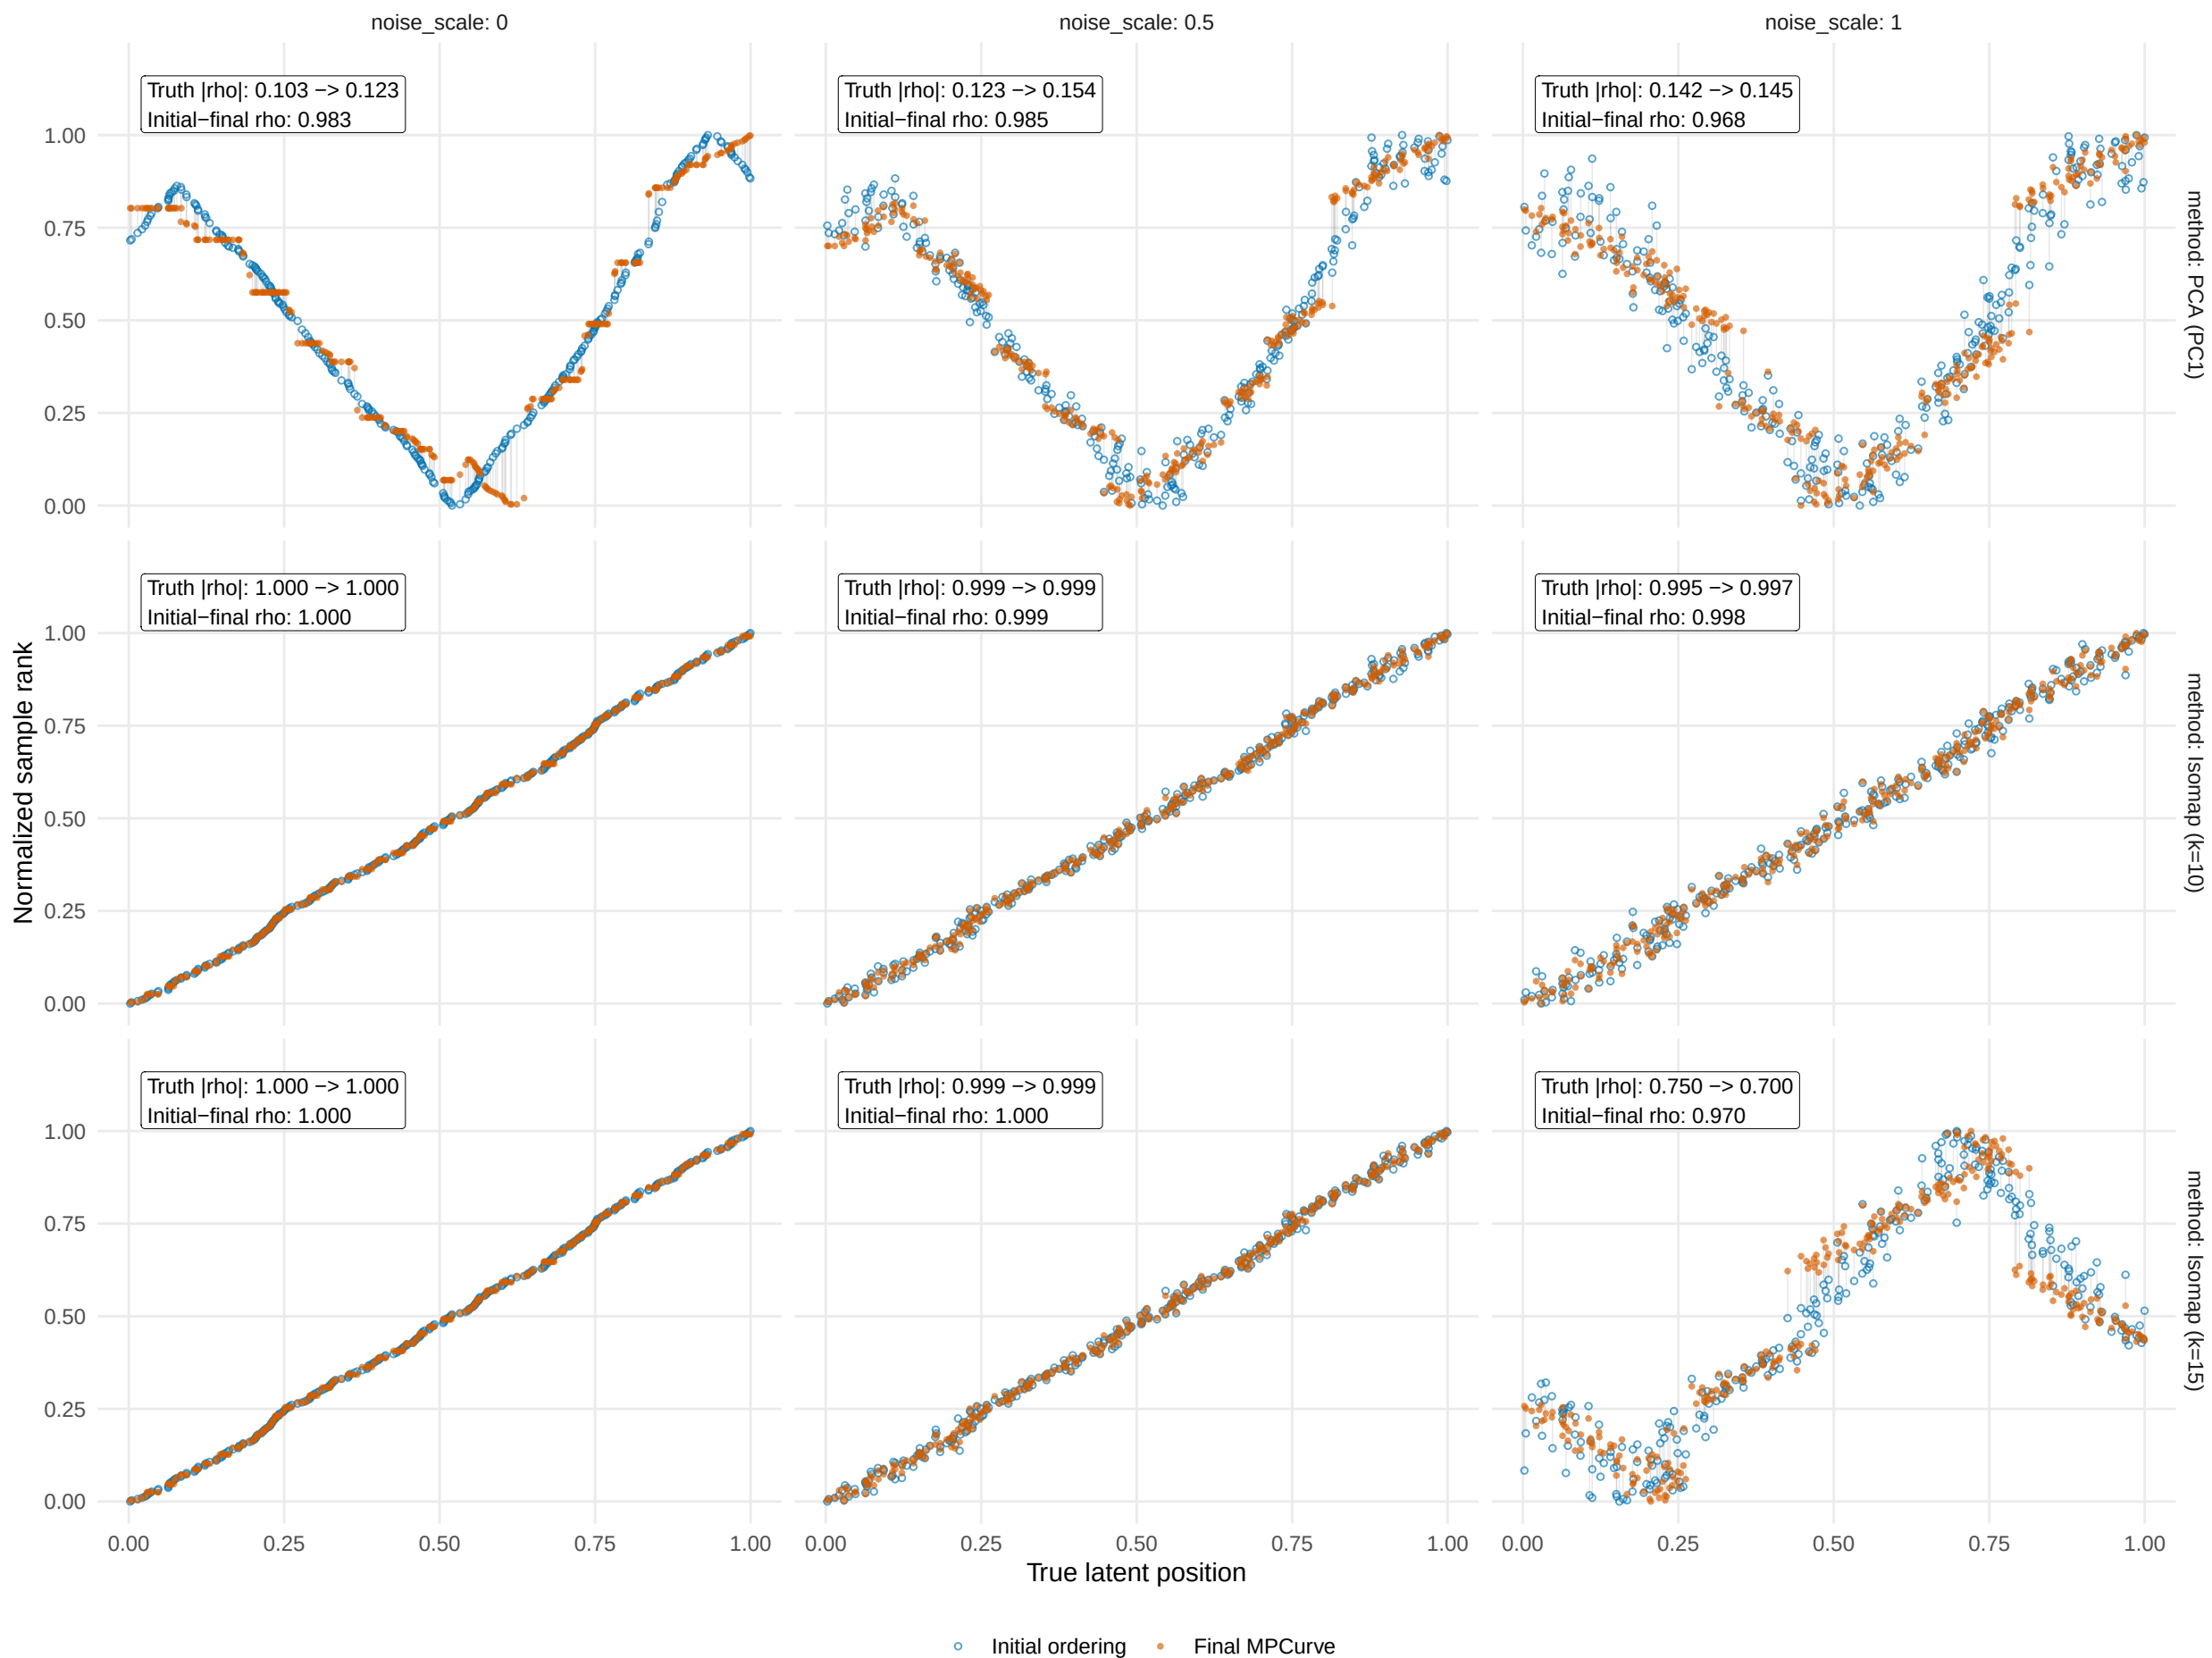

Blue open circles: initial ranks; orange dots: final posterior-mean ranks. Gray segments connect the same sample. Normalized average ranks remove coordinate stretching; global reversal is aligned away. Noise scale 1 is the original data; 0.5 halves the same B noise realization; 0 uses the noiseless B signal. All full-data fits use  $M=5$ , with original group initialization and unchanged annealing/convergence controls.