


Stopping sensitivity with the same native initialization

MPCurve and P-curve use their package-default stopping settings; GP endpoints are unchanged.

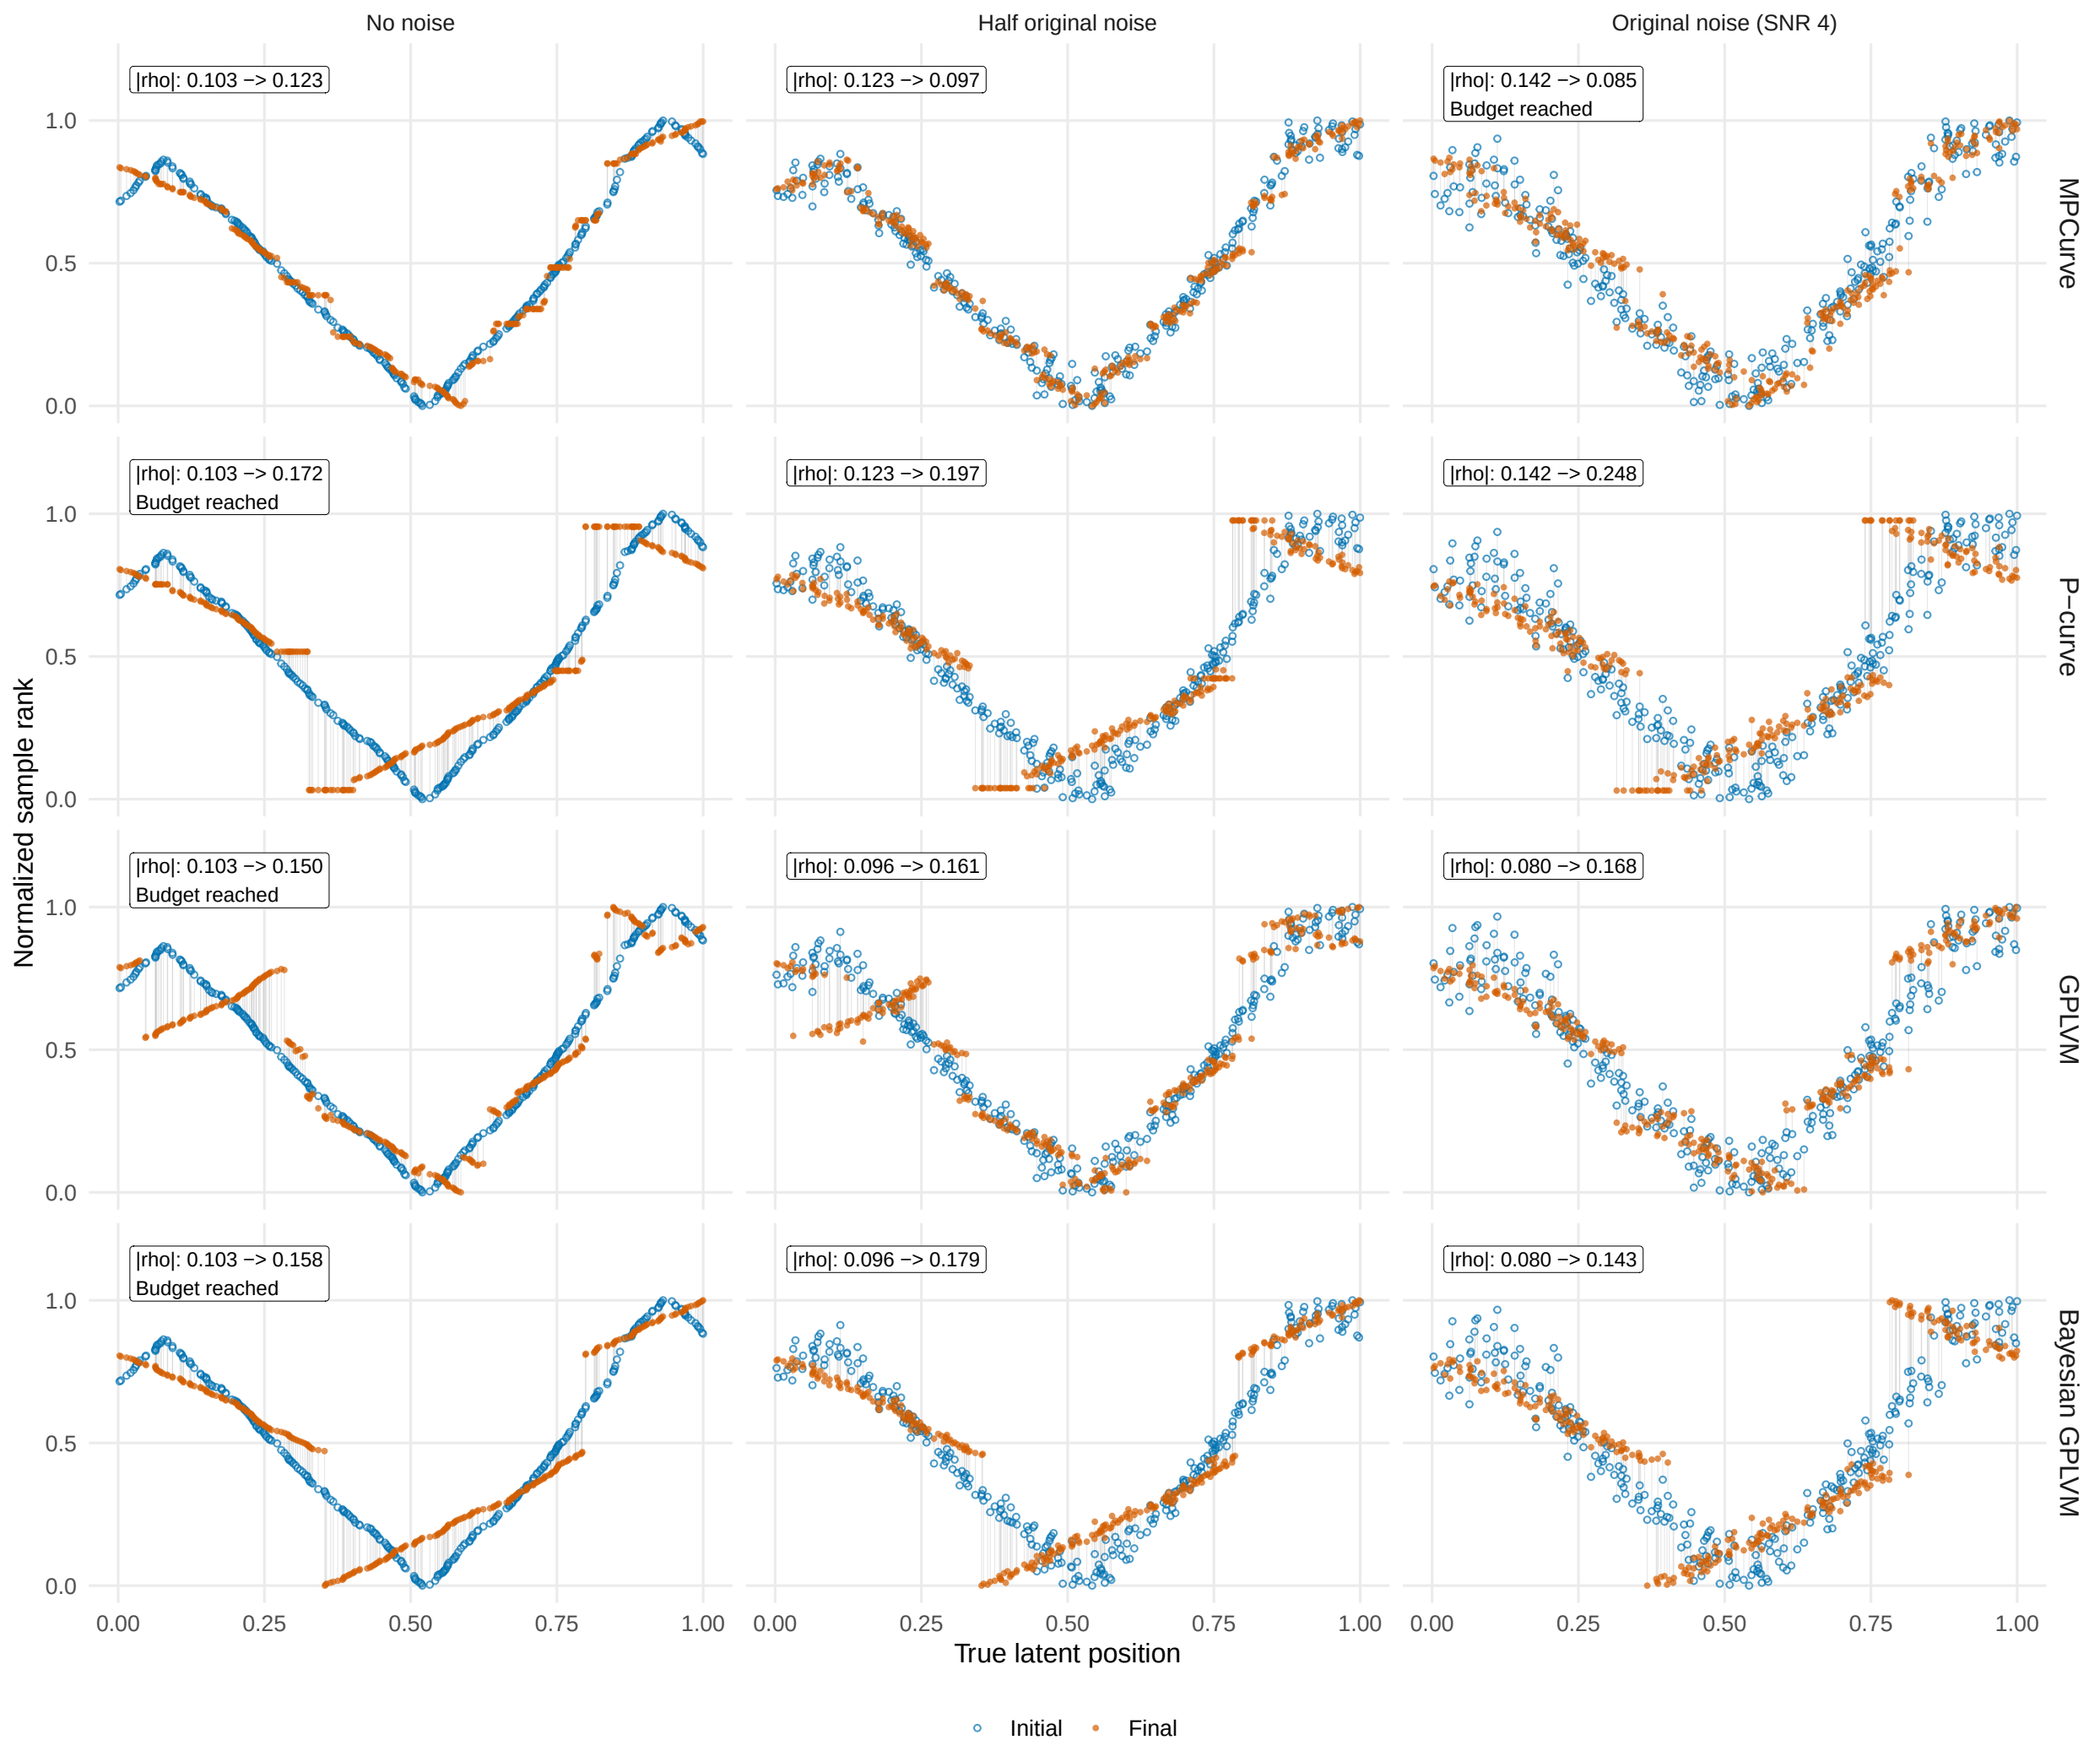

MPCurve: default 100 sweeps, tol = 1e-6. P-curve: default maxit = 10, thresh = 0.001.

All four methods still fit only the same 12 features. Colors and rank conventions match the main figure.

Bayesian GPLVM uses 10 inducing points. GP optimization budgets match the main figure.