

Feature-by-feature Isomap initialization: replicate 6

Same samples and colors in every column | No MPCurve iterations in the Isomap columns

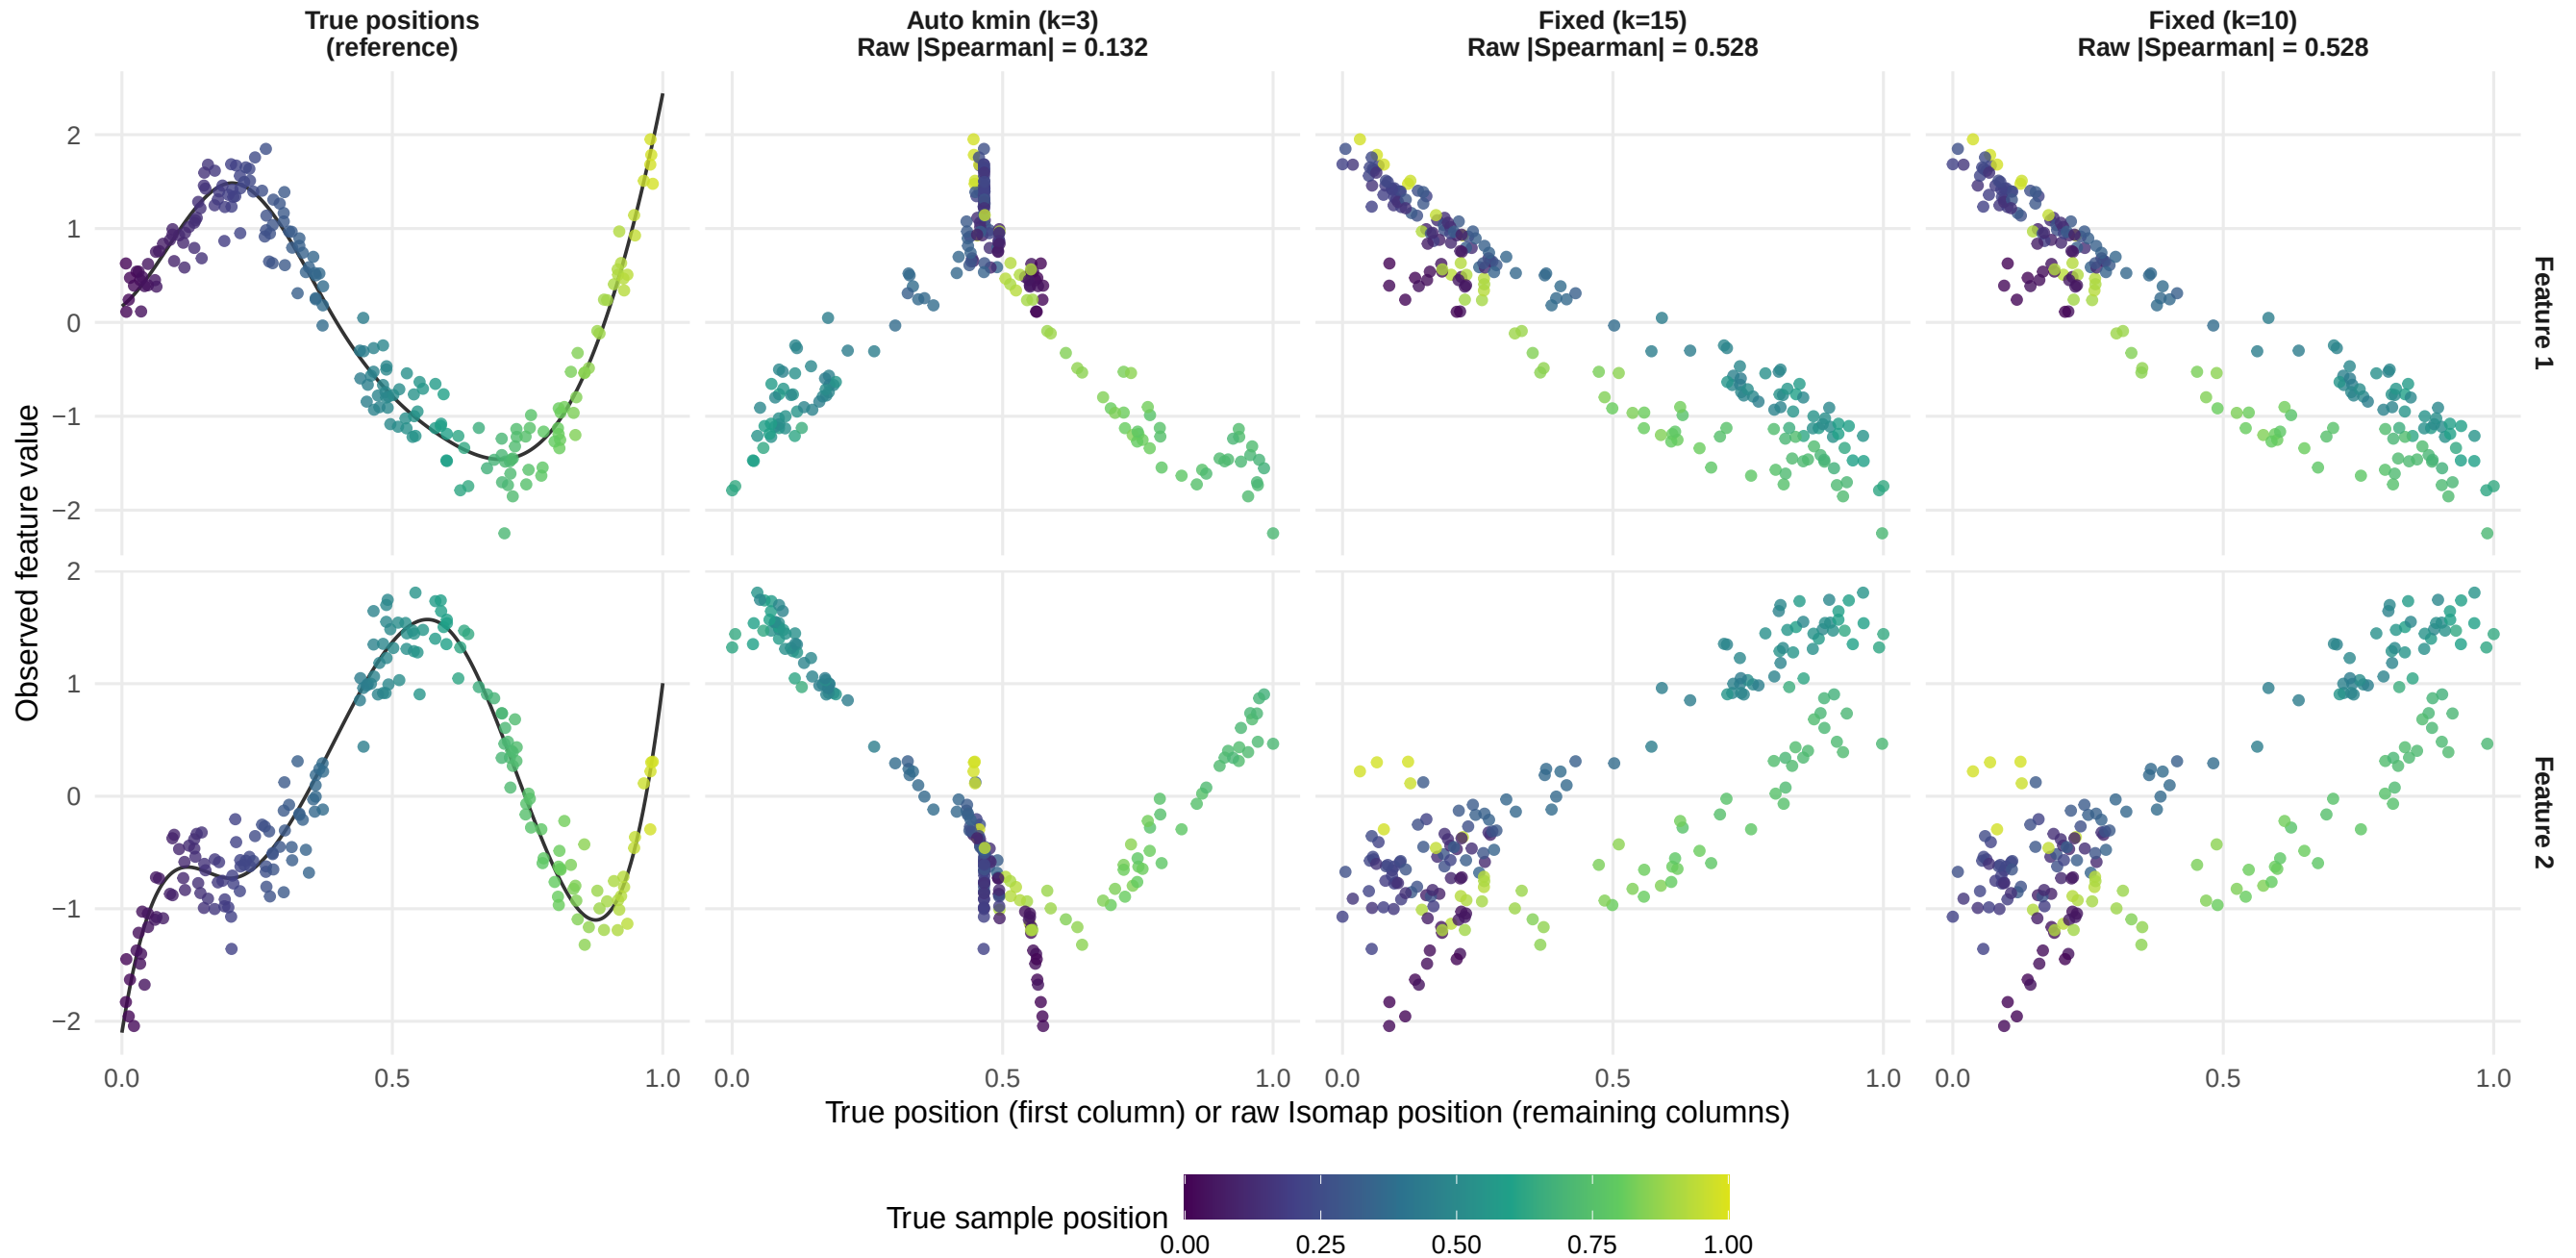


Figure 2. Each row shows one observed feature versus true positions or saved raw Isomap positions. The true-position column overlays the noiseless generating trajectory. Raw coordinates are before quantile binning and MPCurve optimization, scaled to [0,1] by the initializer. A global reflection, if needed, makes rank correlation positive for display; no rank transformation or nonlinear alignment is applied.