

Same feature scatter, different initial orderings: replicate 6

X and Y are the observed features in every panel | Color shows true or initial Isomap position

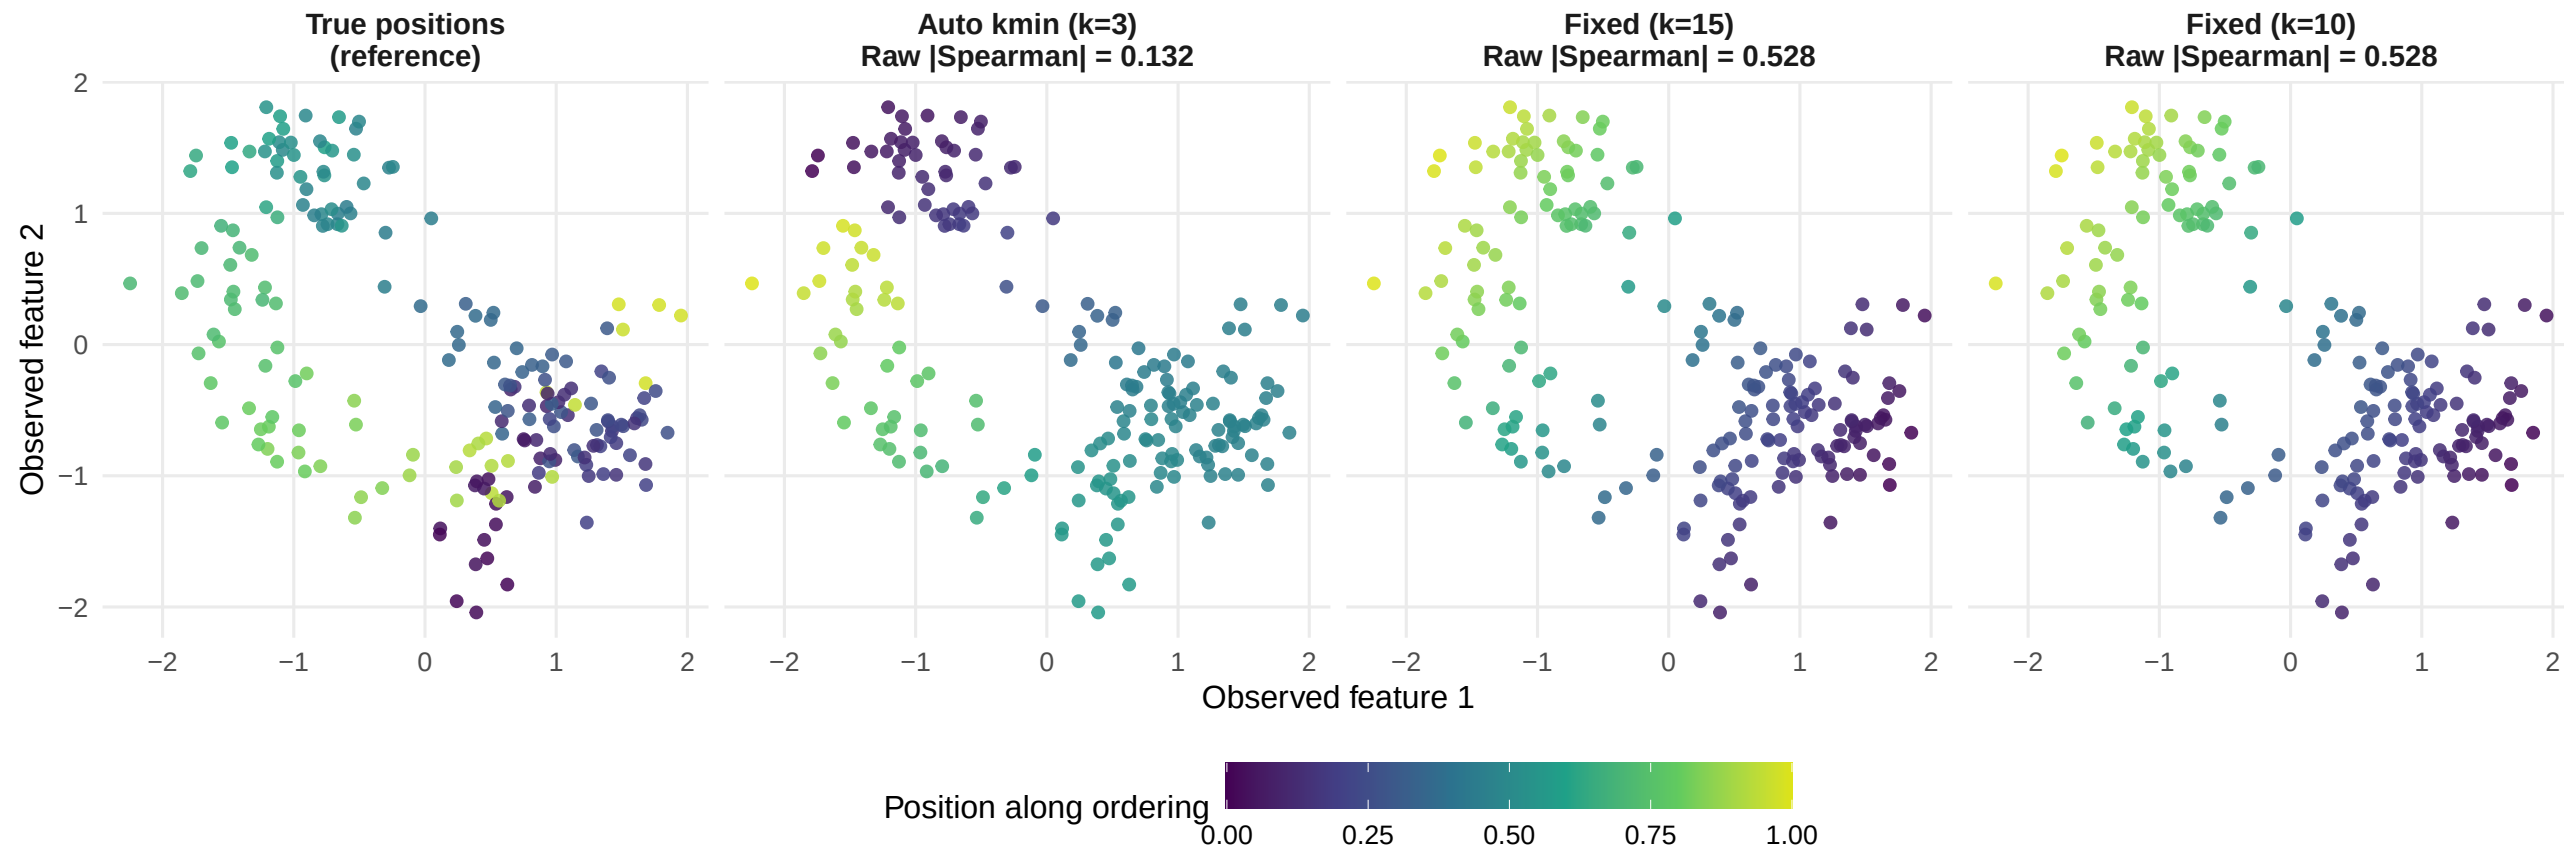


Figure 4. The same 200 observed samples with feature 1 on the horizontal axis and feature 2 on the vertical axis. Colors show true positions in the reference panel and raw Isomap positions in the other panels, before quantile binning or MPCurve fitting. Automatic k=3 positions are globally reflected for display; fixed-k positions retain their original direction. All panels share axis limits and a [0,1] color scale. No rank transformation or nonlinear alignment is applied.