

Original Isomap estimates: replicate 6

Coordinates before MPCurve fitting | All 200 samples retained in every graph

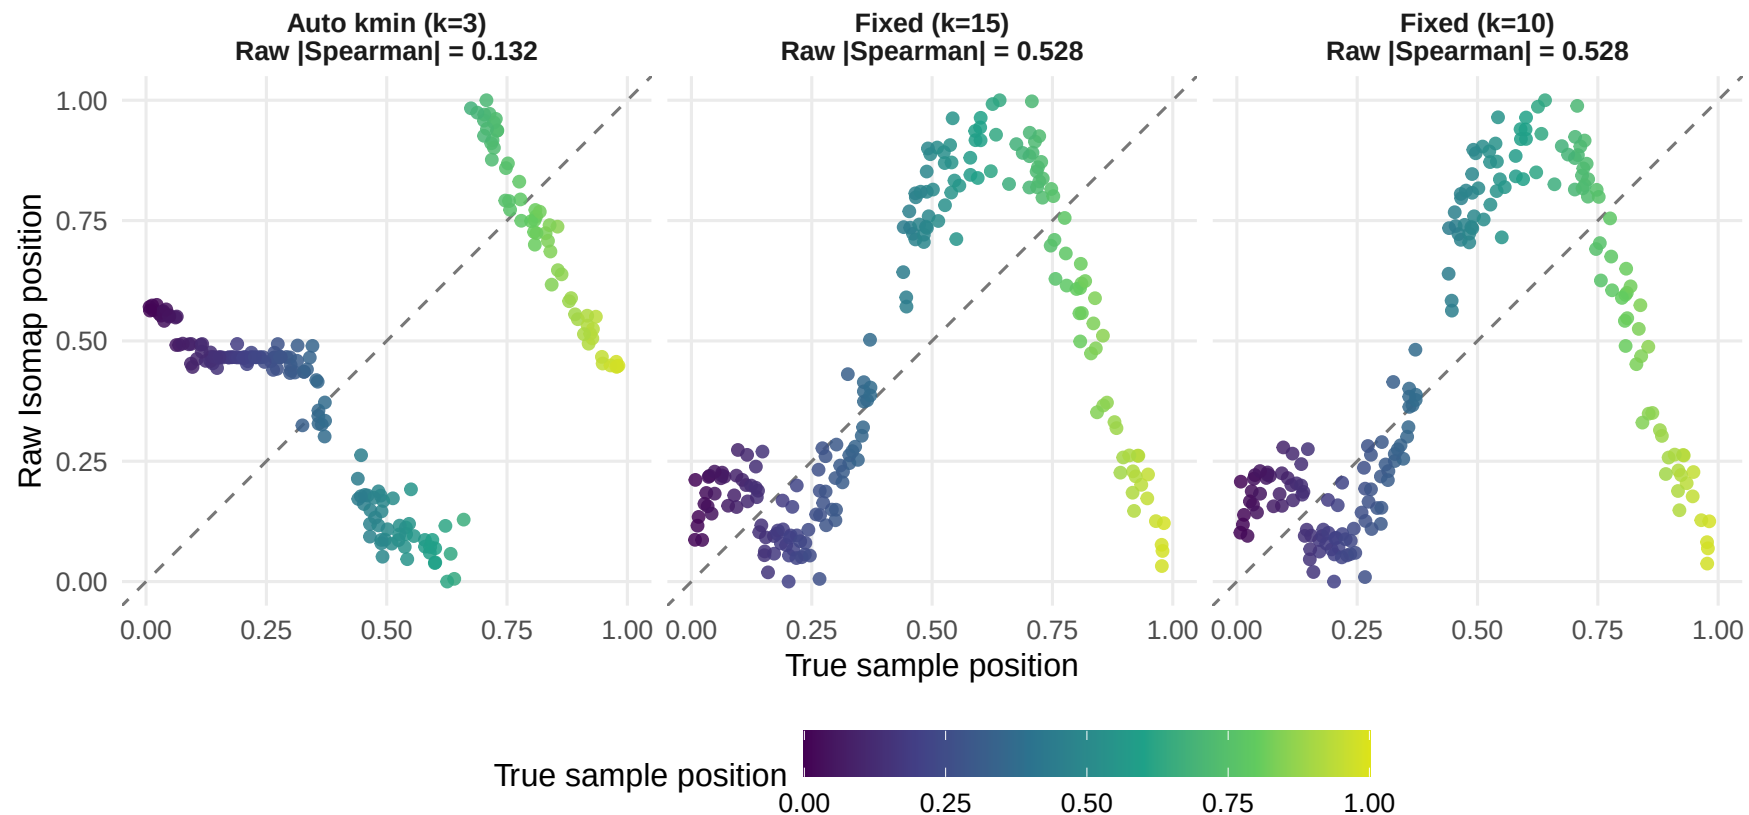


Figure 3. Saved initial Isomap coordinates against true positions for automatic kmin, k=15, and k=10. A global reflection allows ordering reversal for display. The dashed diagonal marks equal coordinates; Spearman assesses rank agreement rather than distance from that diagonal. Colors identify true positions.