

Feature 1 versus feature 4 as noise decreases
Top: colors show truth | Bottom: colors show raw automatic Isomap positions computed from all four features

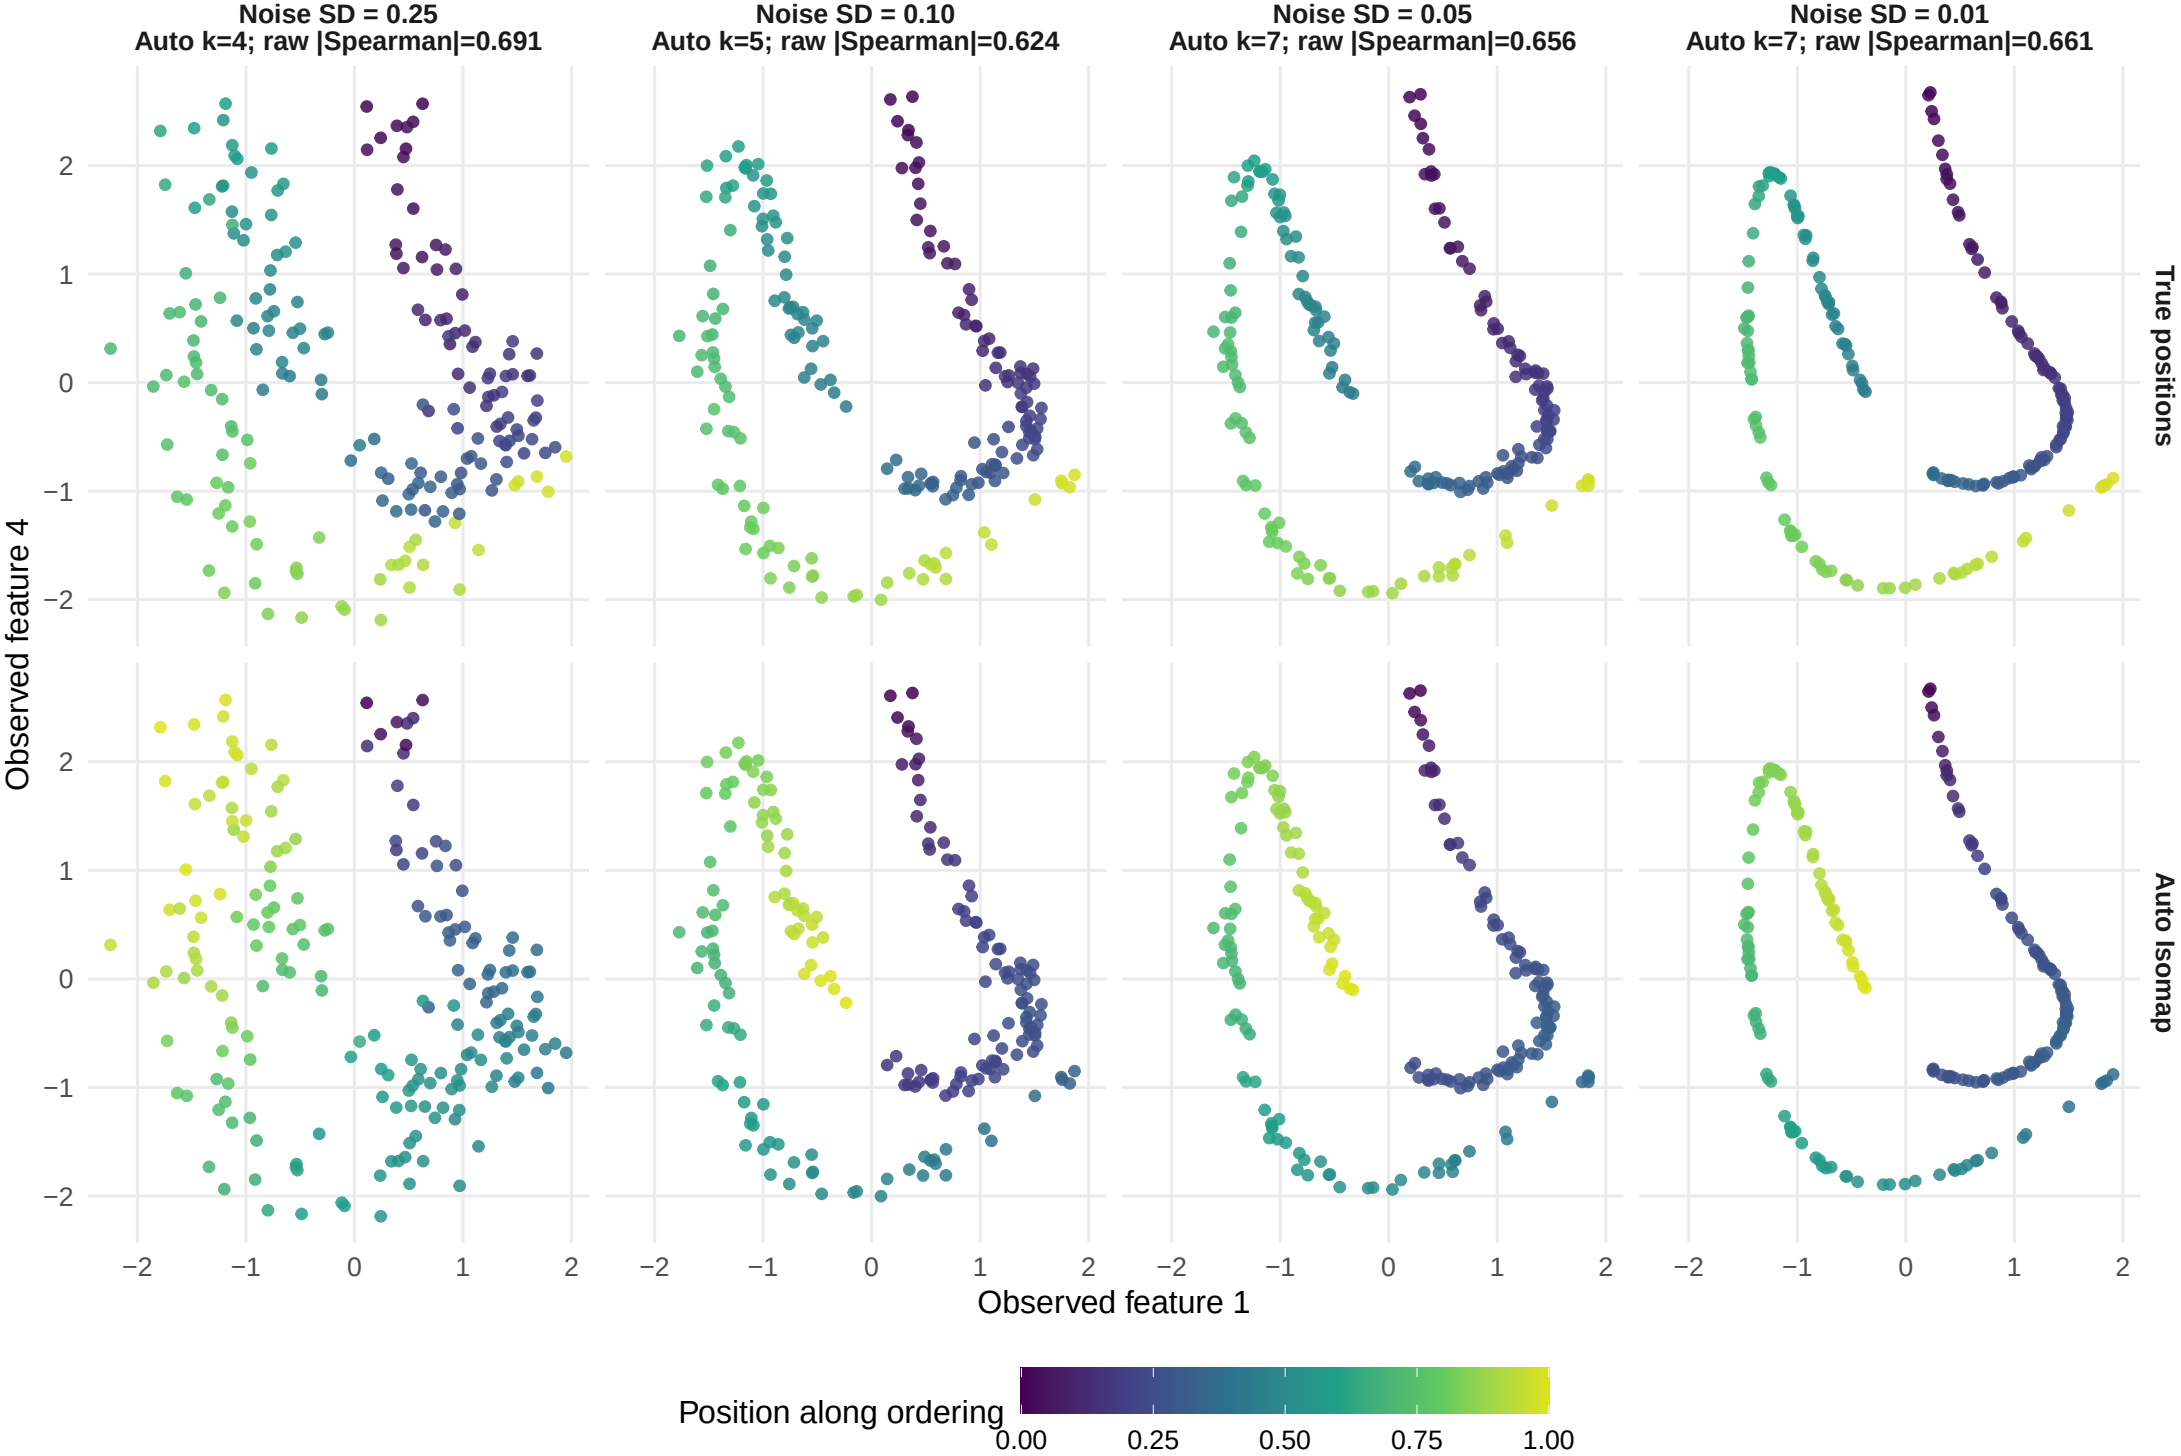


Figure 2. Same trajectories and noise directions, with decreasing noise SD from left to right. Axes are observed features 1 and 4; Isomap uses all four observed features. Top/bottom panels contain identical samples at each noise level. Raw Isomap positions precede binning and MPCurve fitting; only global reflection is allowed for display. Axis limits and [0,1] color limits are shared across panels.