

Position recovery after adding two trajectories

20 paired replicates | Original two features, sample positions, and noise preserved

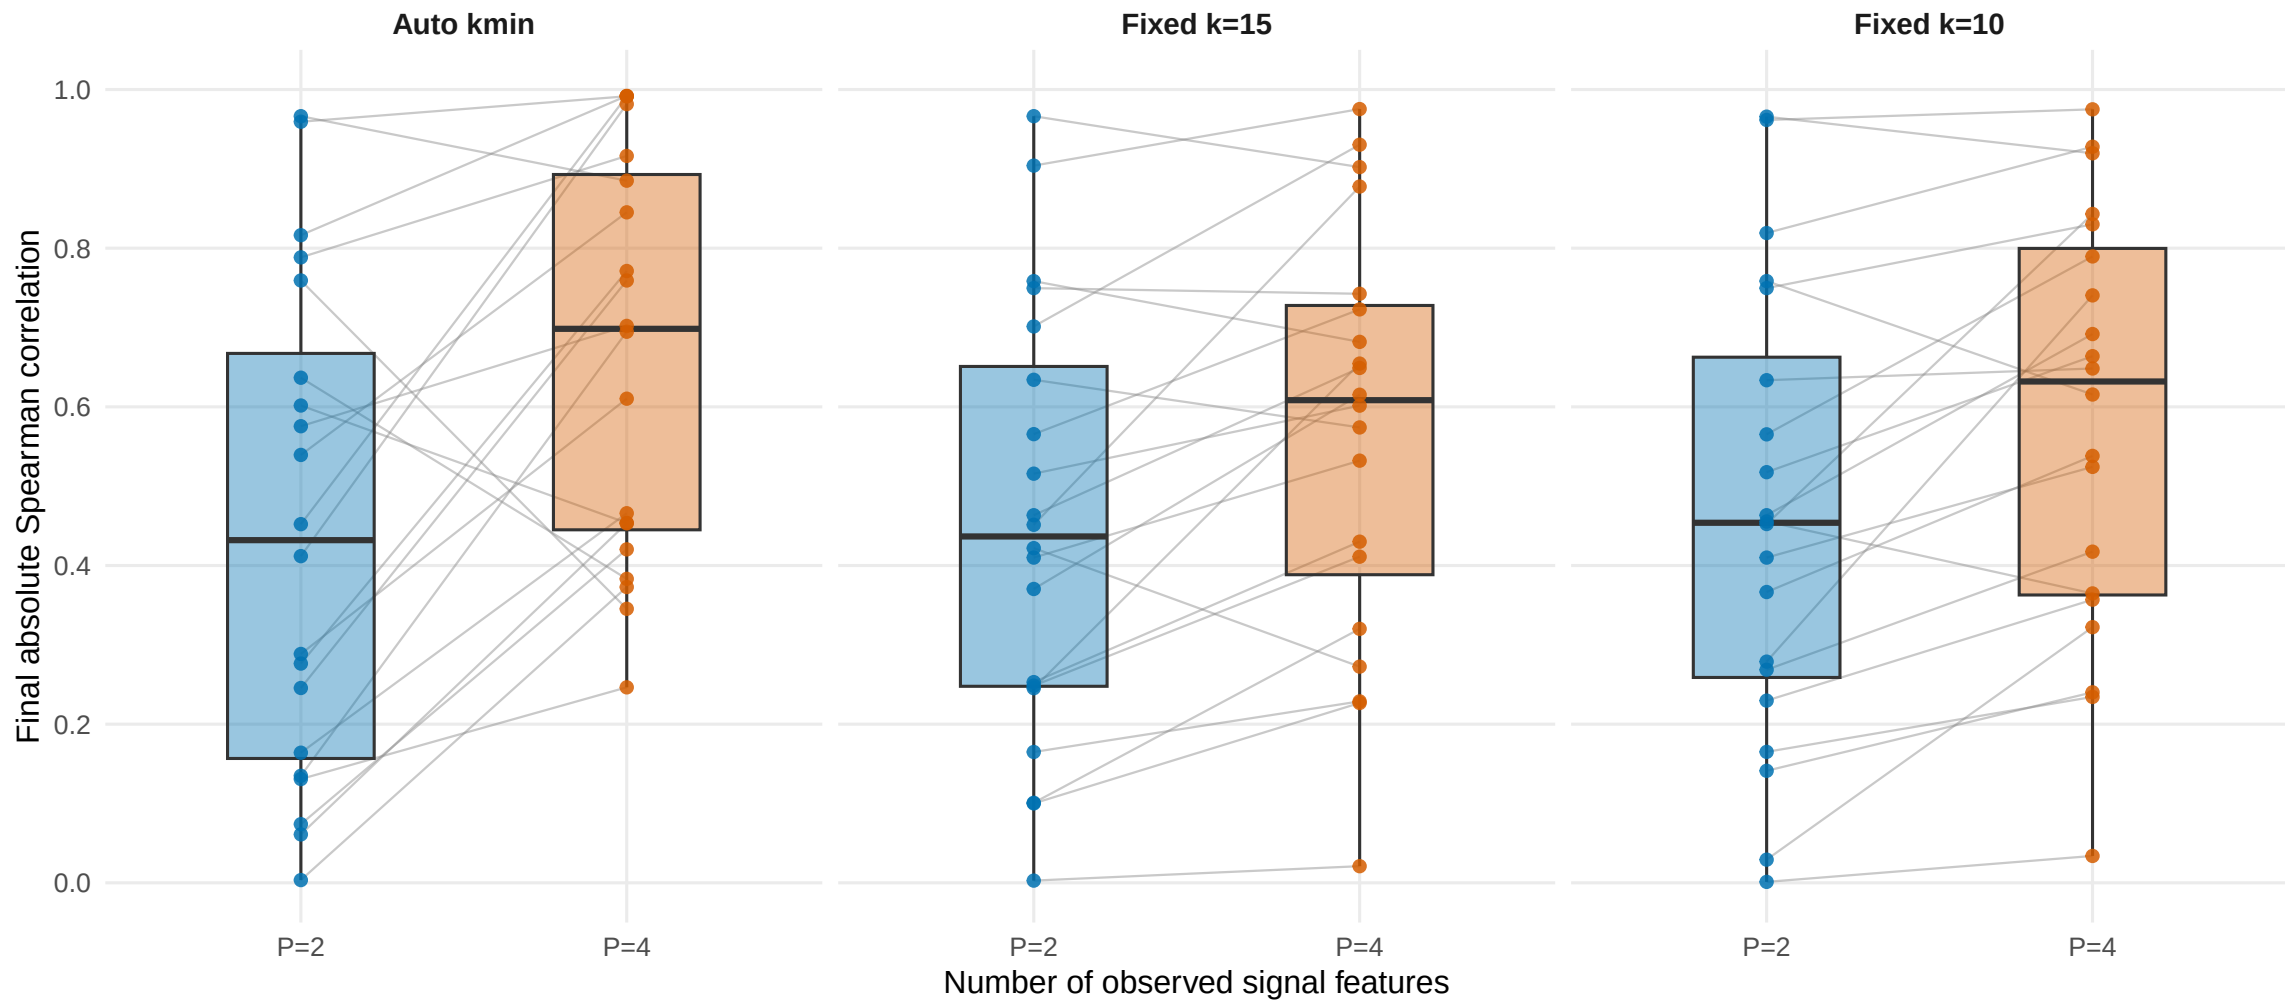


Figure 1. Converged MPCurve position recovery with P=2 or P=4, N=200 and M=1. P=4 appends two independent nonmonotone cubic B-spline features; average signal variance remains one and noise SD=0.25. Gray lines connect the same replication. Scores allow global reversal; boxes show median/quartiles and whiskers extend to the most extreme values within 1.5 IQR. All 20 endpoints per feature-count/method combination are included.