

Position recovery with automatic and fixed Isomap neighborhoods

20 paired replicates | Paired four-feature nonmonotone curves | Fits run to convergence

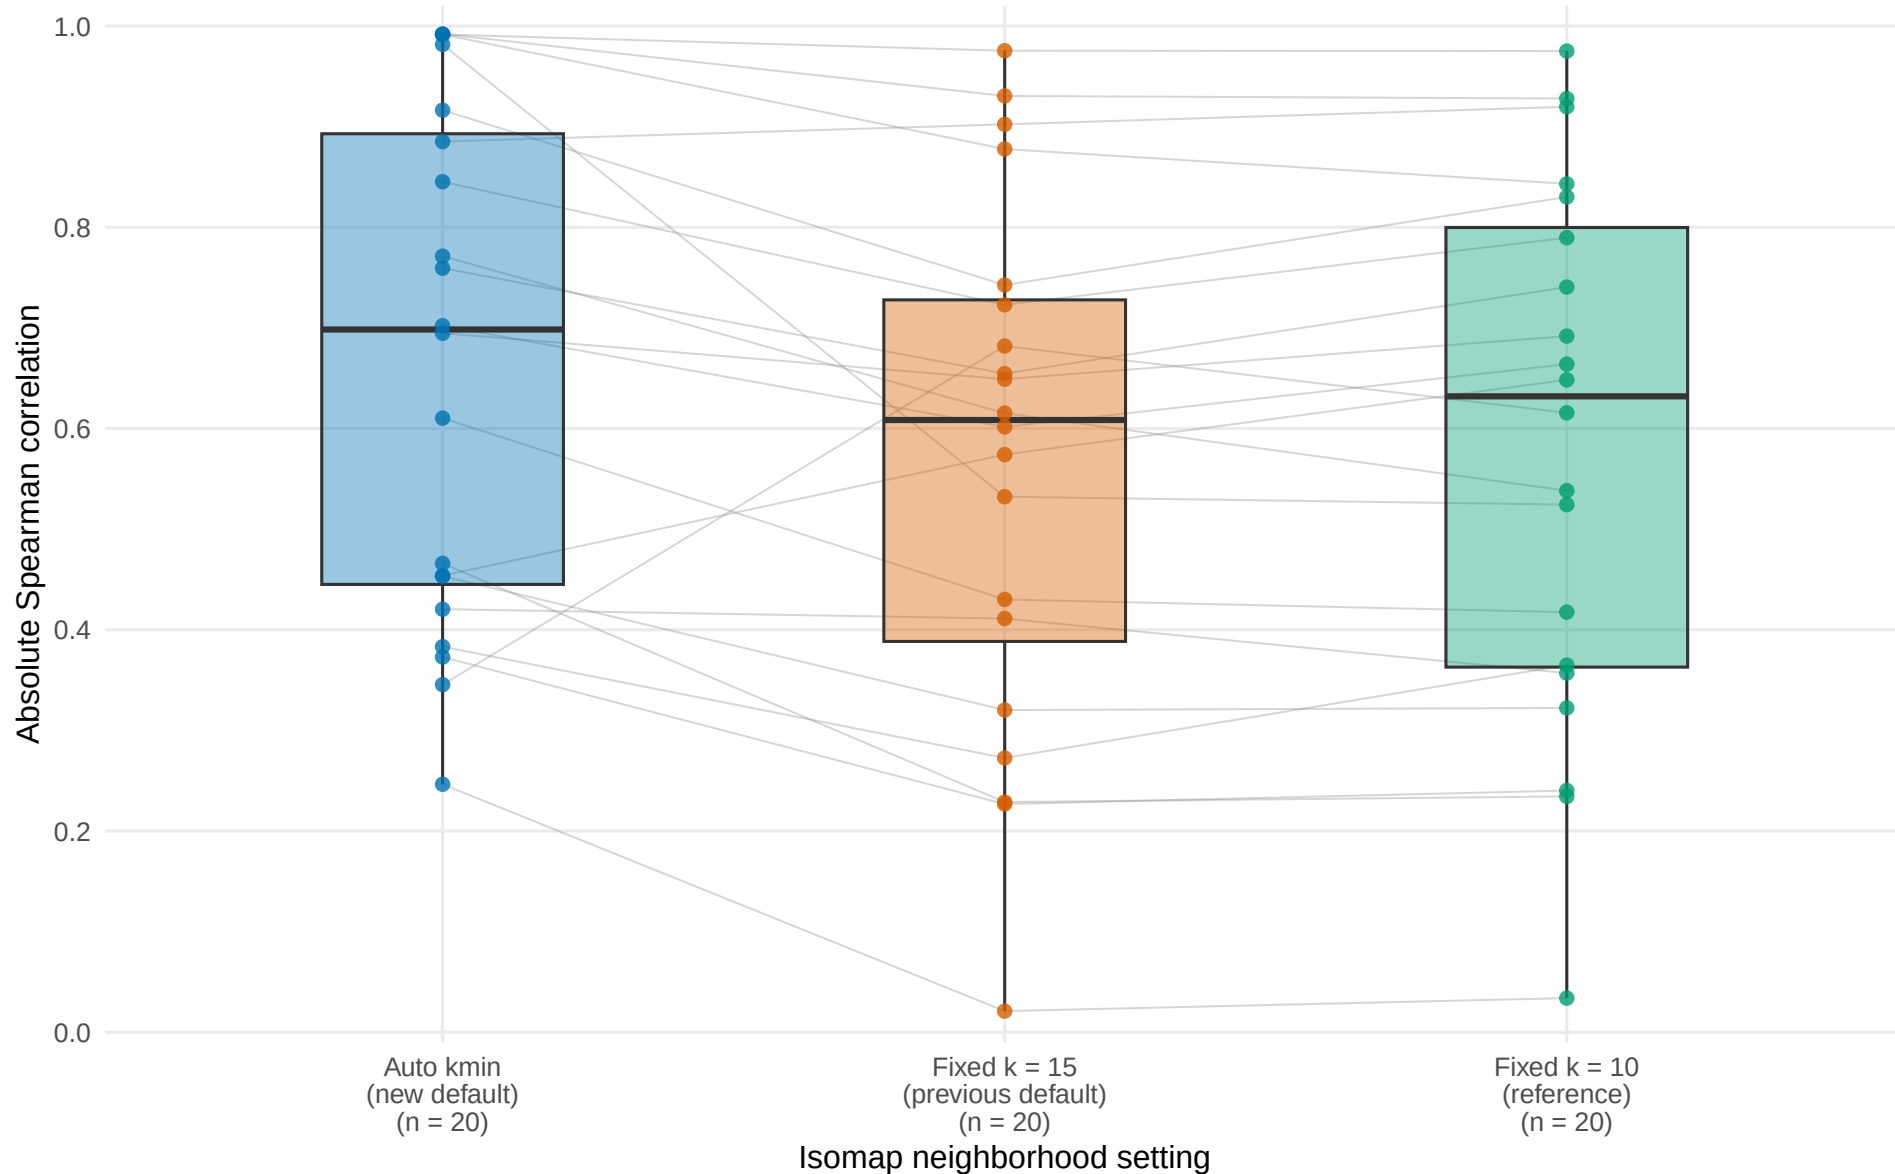


Figure 1. Twenty independent random cubic B-spline realizations with $N=200$, $M=1$, $P=4$ and Gaussian noise $SD=0.25$ (average variance $SNR=16$). Score = $|\text{cor}(t, q, \text{method}='spearman')|$ between true positions and fitted posterior means; the absolute value allows global ordering reversal, and ties use average ranks. Each point is a final MPCurve fit; gray lines connect identical datasets. Boxes show median and quartiles; whiskers reach the most extreme values within 1.5 IQR. Converged fits: 60/60; failures: 0; missing scores: 0.