



Recommended ACES Workflow for Mi-Log

December 2024

Contents

1	Introduction	1
2	Workflow	2
2.1	Importing a HEVC Mi-Log Video	2
2.2	Applying DCTL Effects	3
2.3	Applying ACES Transform	4
2.4	Transforming to Rec.709	5
3	Mi DCTL File Loading Steps	6
3.1	Opening DaVinci Resolve and Accessing Project Settings	6
3.2	Creating a New Folder and Adding the DCTL File	6

1 Introduction

ACES (Academy Color Encoding System) is a color image encoding system in the film industry through which the color compatibility between different cameras can be better compatible. The guide takes an HEVC Mi-Log video as an example to provide instructions on how to use the ACES workflow using video editing software, such as DaVinci Resolve.

2 Workflow

2.1 Importing a HEVC Mi-Log Video

Import a HEVC Mi-Log video to the editing software and add the video to the timeline. Click on the Color tab and create nodes for the video.

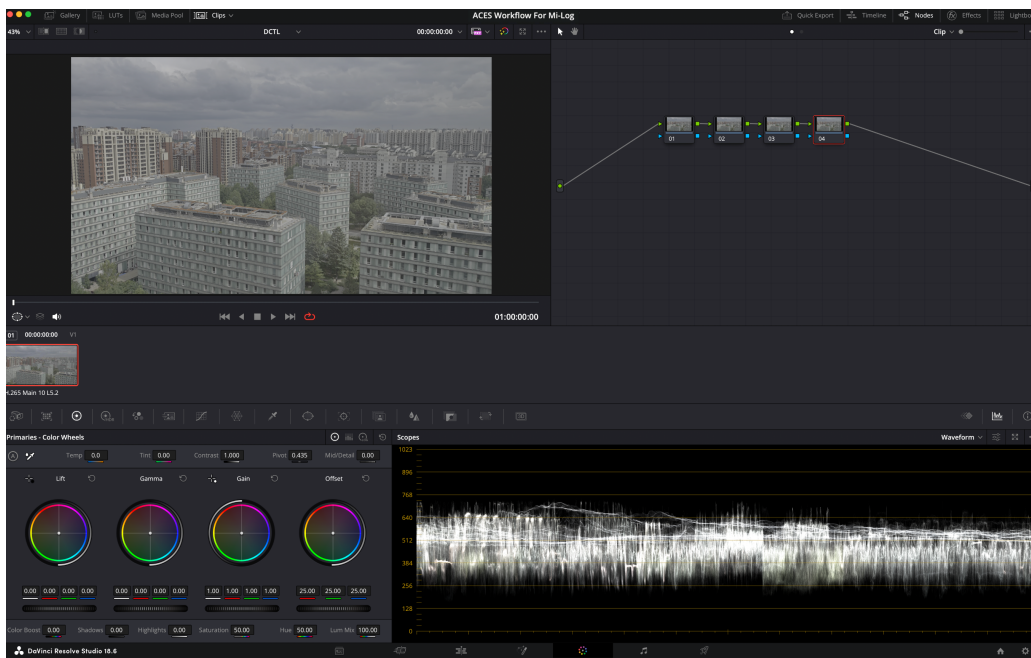


Figure 1: import HEVC Mi-Log video and create nodes.

2.2 Applying DCTL Effects

Click on the Effects tab located in the upper right corner. Select DCTL, then click and hold to drag and drop it on the first node. Select MiLog_to_ACES_AP0 in the DCTL List. This step transforms the video from Mi-Log to linear AP0 color space in ACES.

Note: It is required to load the Mi DCTL file first. For more information, refer to the Mi DCTL File Loading Steps section.

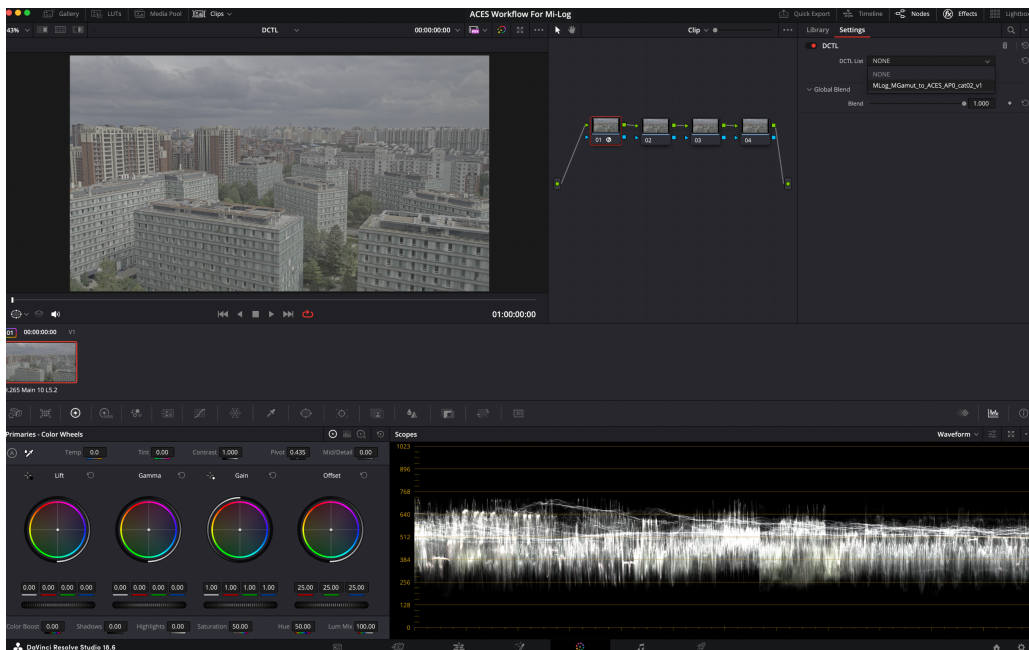


Figure 2: applying DCTL effects.

2.3 Applying ACES Transform

Click on the Effects tab in the upper right corner. Select ACES Transform, then click and hold to drag and drop it on the second node. Select ACES 1.3 in ACES version. Select No Input Transform in Input Transform. Select ACEScct-CSC* in Output Transform. This step transforms the video from linear AP0 color space to AP1 log color space. The user can adjust the brightness and color of the video in AP1 color space.

Note: Users can also select ACEScc-CSC or ACEScg-CSC in Output Transform, if needed.

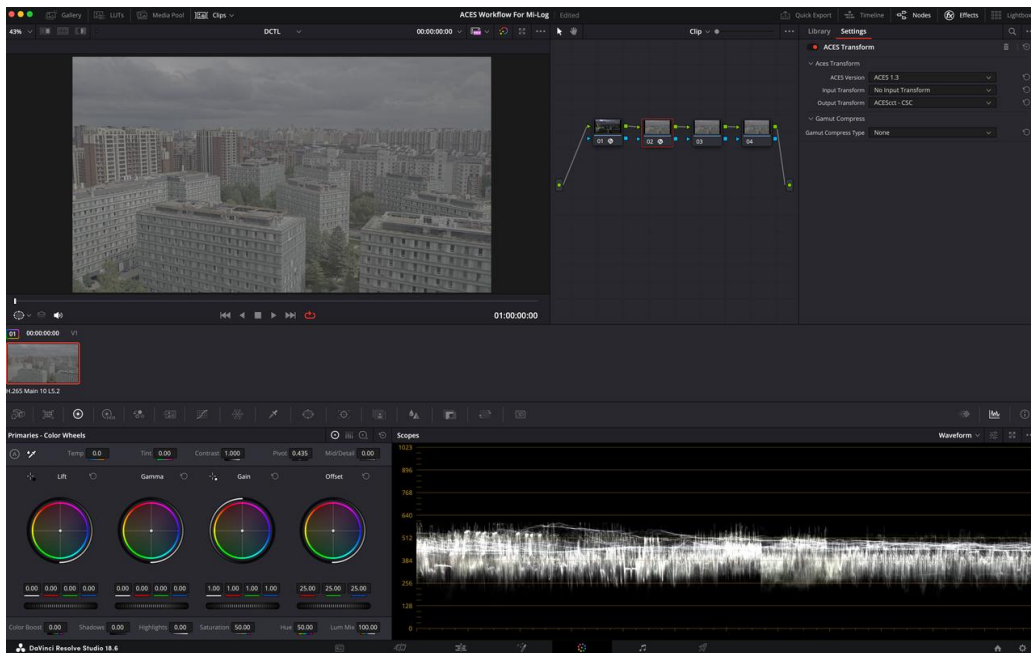


Figure 3: applying ACES transform.

2.4 Transforming to Rec.709

After the color adjustment is completed, the user can continue to use ACES on subsequent nodes to transform the video to RRT or other color spaces. Here we take the transformation to Rec.709 as an example. Click on the Effects tab in the upper right corner. Select ACES Transform, then click and hold to drag and drop it on the subsequent node. Select ACES 1.3 in ACES version. Select ACEScct-CSC in Input Transform. Select Rec.709 in Output Transform. This step transforms the video from AP1 color space to Rec.709 color space, so as to facilitate subsequent video export.

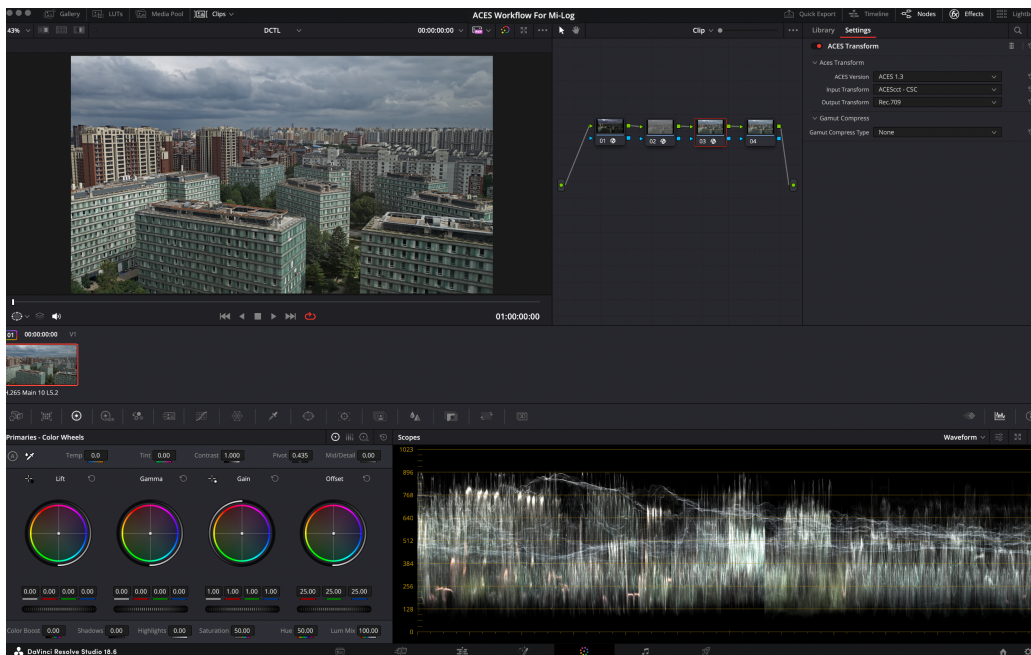


Figure 4: transforming to REC.709.

3 Mi DCTL File Loading Steps

3.1 Opening DaVinci Resolve and Accessing Project Settings

First, open DaVinci Resolve. Click on the Project Settings icon, which is located in the lower right corner of the interface. In the Project Settings pop-up, select the Color Management option. Then, click on Open LUT Folder.

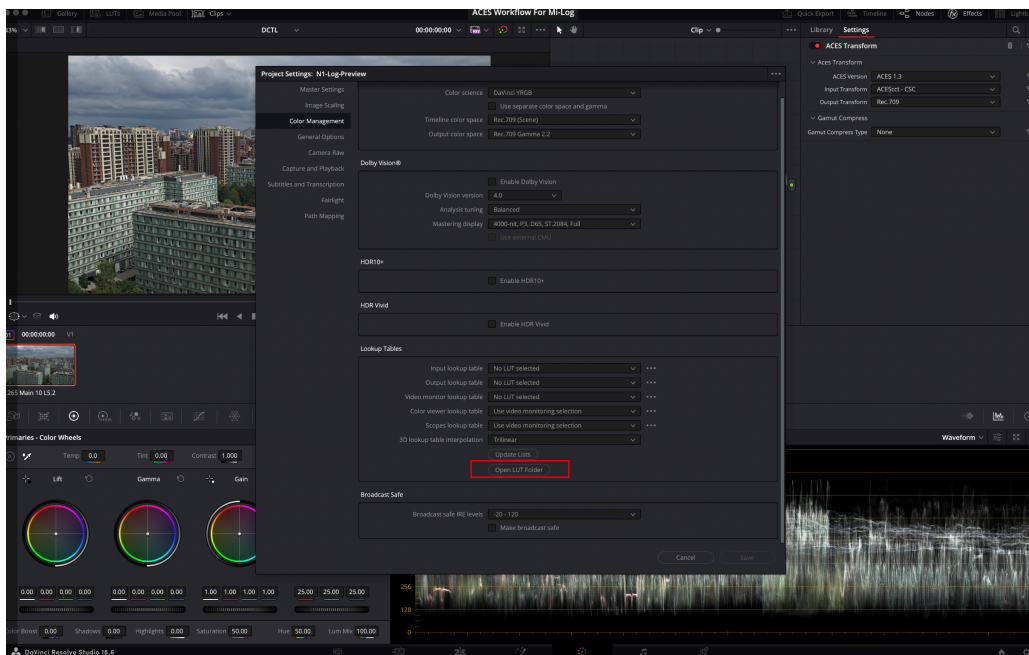


Figure 5: opening Davinci resolve and accessing project settings.

3.2 Creating a New Folder and Adding the DCTL File

In the opened folder, create a new folder. Rename this folder to DCTL. Then, place the MI DCTL file, which is named MiLog_to_ACES_AP0.dctl, into the DCTL folder. To ensure the DCTL file takes effect, restart Davinci Resolve.