

# **SWG:PE BAREMETAL ALMALINUX 8.6** **& SWG SERVER SETUP GUIDE**

In this guide we will install a AlmaLinux 8.6 OS and compile a SWG server using the methods from other guides.

**DO OR  
DO NOT.  
THERE IS  
NO TRY.**

*Yoda.*



## **Disclaimer:**

**I DO NOT CLAIM ANY OF THE CONTENT IN THIS GUIDE !**

**That right belongs to the original content creators.**

**I only rewrote it from my perspective.**

**All credits are mentioned on Page #1 of the enclosed guide.**

**Guide Reimagined By**  
SWG:PE Dev.ForsakenReaper

*This guide came from learning how to setup baremetal machine based on the guide from Tekohswg that was modified by RezecNoble (source:<https://github.com/SWGEvolve/swg-prepare>). Some information in this guide came from this original document. All credits go to them for the information ive used to make this guide. Im only translating this into a new indepth guide for the almalinux 8.6 machine setup part of that guide from start to finish.*

*TY to Tekohswg & RezecNoble along with the SWGSource community (<https://discord.gg/YyqABFJYnR>) for all your knowledge that goes into this guide.*

## **Preperation: For Baremetal Install.**

- 
- I Assuming you have your machine ready to install a Linux OS (Operating System) .
  - Assembly of the preperation for this server was done from Windows 11 Home 64bit to a HP DL360p gen8
  - Rackmount.
- 

(1) Download AlmaLinux 8.6 from [https://mirrors.almalinux.org/isos/x86\\_64/8.6.html](https://mirrors.almalinux.org/isos/x86_64/8.6.html)

- Choose a mirror then select (AlmaLinux-8.6-x86\_64-dvd.iso) link.
- You will begin to download AlmaLinux-8.6-x86\_64-dvd.iso to where ever you set your browser to download files to.

(2) Download Rufus 3.21 from <https://rufus.ie/en/>


- You will begin to download rufus-3.21.exe to where ever you set your browser to download files to.
- This is the tool I use to make a bootable/mountable usbdrive to install OS's.
- You may replace this step with your tool of choice but due to the Vastness of tools used to burn iso's
- I will only be covering Rufus in this tutorial.

(3) Insert A USB Drive of no less than 16GB.


## **Installing Rufus:**

(4) Right Click on the rufus-3.21.exe and Run As Administrator.

- A UAC (User Account Control) window will pop up and ask Do you want to allow this app to make changes to your device ?
- Choose yes and now rufus will open up.


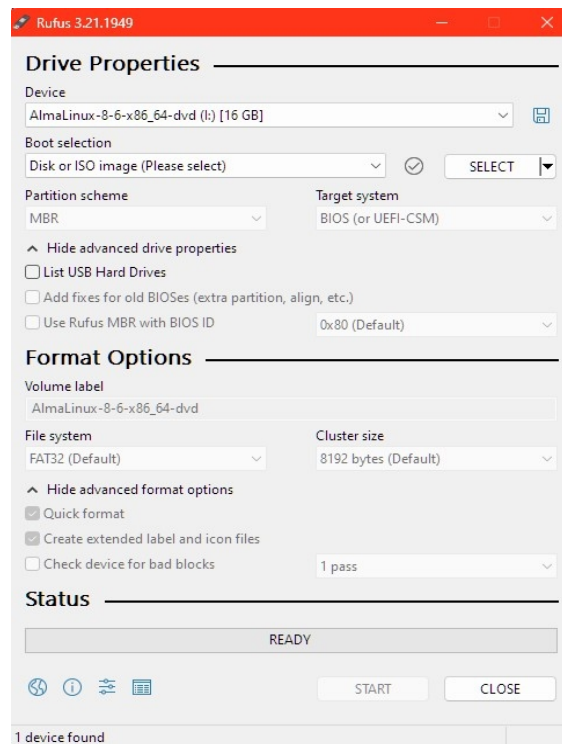


(5) Make sure you have your USB drive selected in drop down menu under DEVICE.

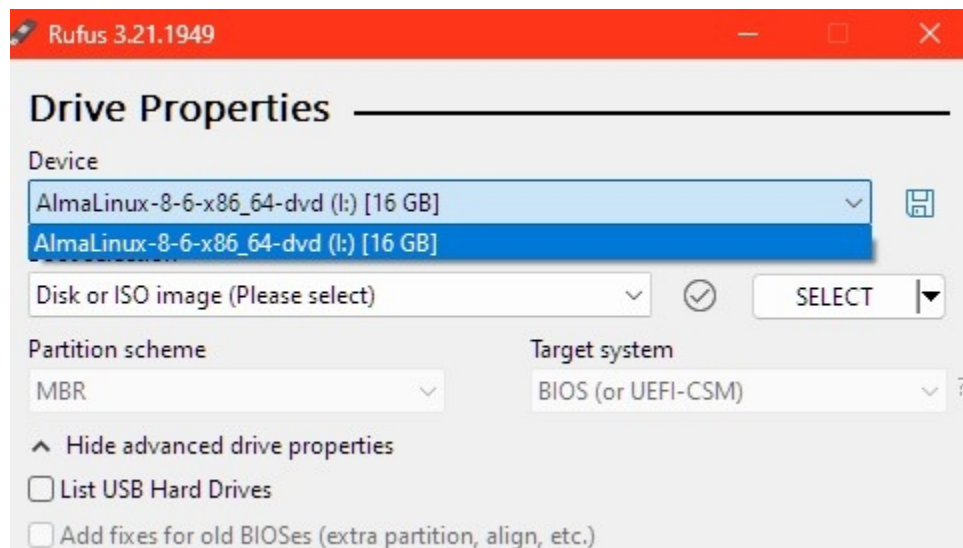


(6) Under (Boot selection) make sure you have (Disk or ISO image) selected.


(7) Next click on the (SELECT) box and navigate to you Almalinux Iso(AlmaLinux-8.6-x86\_64-dvd.iso) you downloaded earlier.

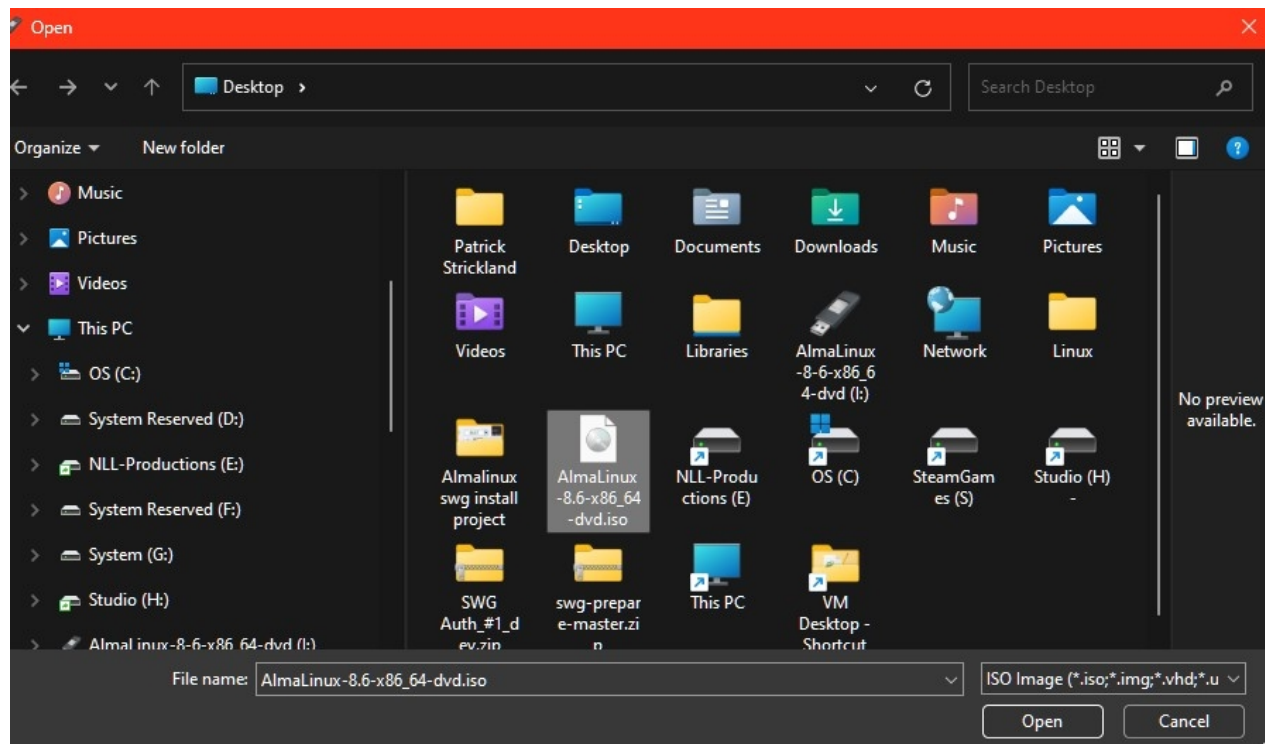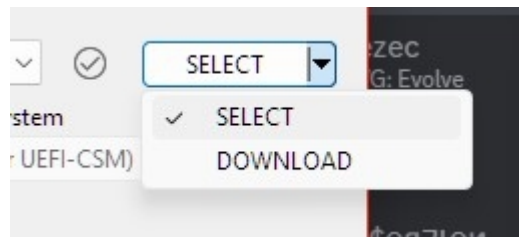


(8) You should now see AlmaLinux-8.6-x86\_64-dvd.iso in the (Boot selection) window.

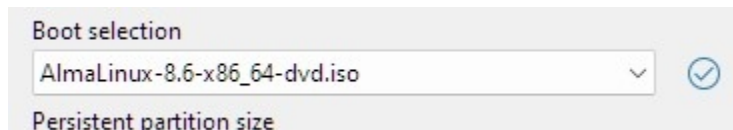


(9) We now want to look under (Partition scheme) and set the partition to (MBR) and (Target system) to (BIOS or UEFI).

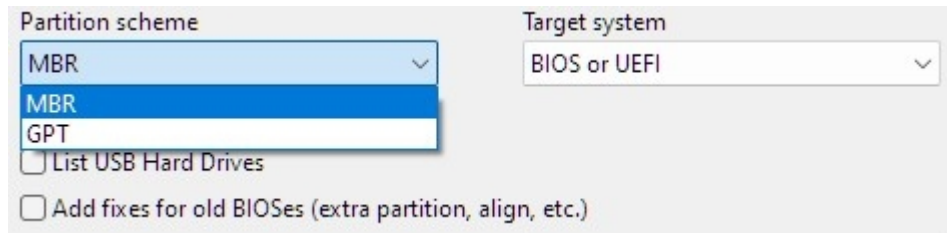


(10) Under (Format Options) Section we want to change (File system) to (FAT32) and make sure (Quick format) checkbox is selected, and the (Create extended label and icon files) checkbox is selected.

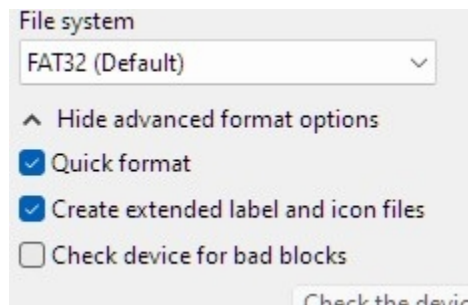


(11) Next click on (START) at the bottom.

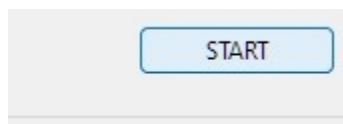


(12) A window will pop up asking which mode you want to use to write the image. Select (Write in ISO Image mode), and click (OK) .

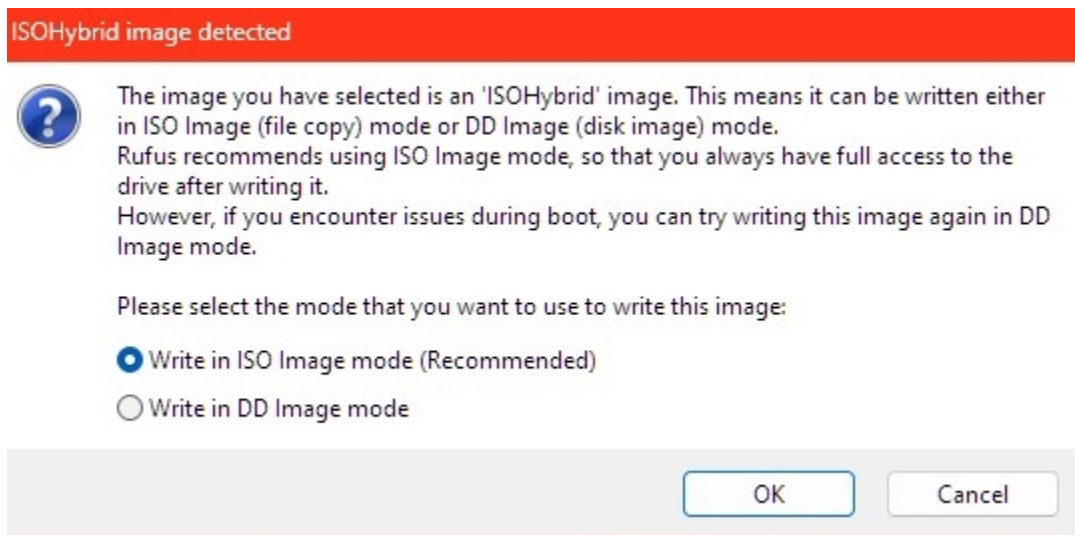


(13) Another window will pop up asking if you want to erase all data on the usb drive click (OK).

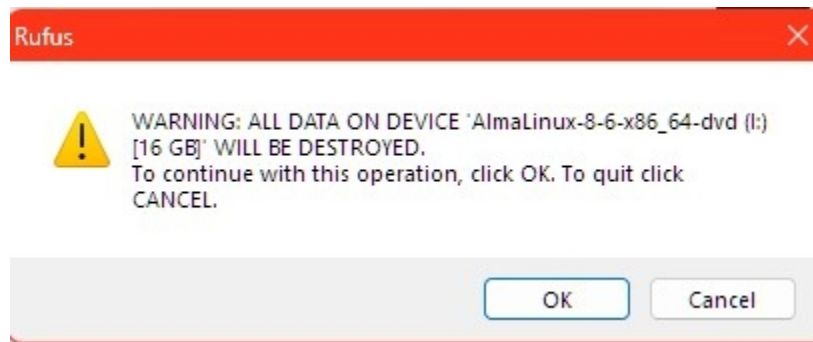

(14) Rufus will now start copying your AlmaLinux OS onto the USB Drive. This process take a while to complete and is very slow so be patient... mine takes around 30 mins on a 10th gen intel with 48GB ram to give you any idea.

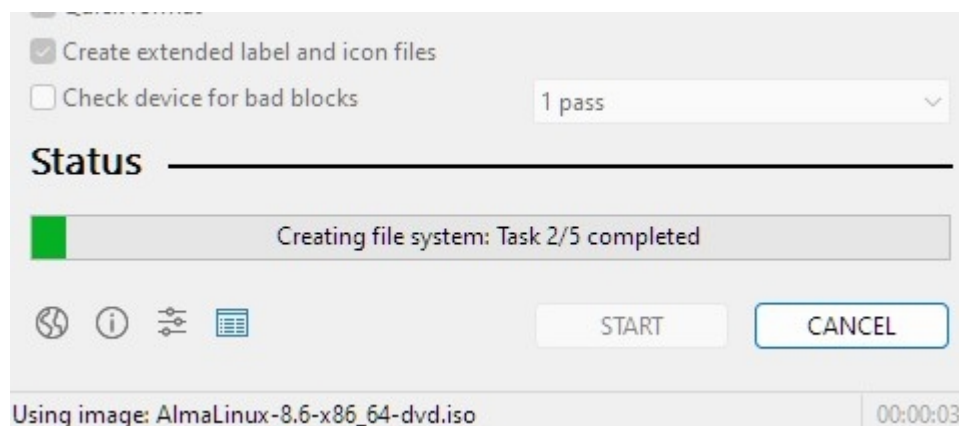

(15) When its finished ... it will say (READY) in the green bar at the bottom of Rufus.

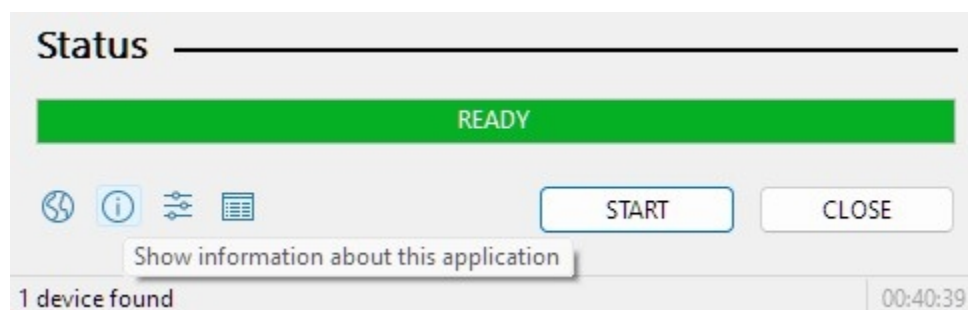

(16) We are now ready to start our install of AlmaLinux 8.6 onto our hHP DL360p GEN 8. If you know how to install linux you may skip this part just make sure you install with user ( swg ) and any password you choose make it secure !


- We will meet you at Step ( 23). Most builds are similar except the rackmount part but for the purpose of this guide we will be showing our build on our rackmount.

- (17) Take Out USB stick and place into you Host Machine in which you will install the OS with the machine off.  
Turn on your machine and acces the boot menu for your type of machine to manually boot from the USB drive ...


**Note:** *Some machines automatically boot from a usb drive .If you know yours does this automatically then you don't have to Manually use the boot menu.*

## INSTALLING ALMALINUX 8.6 ON YOUR HOST MACHINE :

- (18) After you power on your machine.You will need to grab the boot menu option if you have one and boot your USB drive.

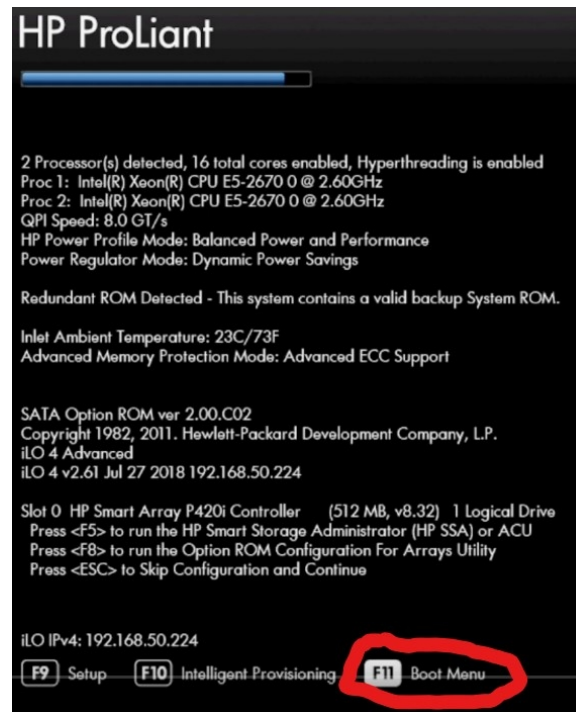


- (19) Select your boot device.for me it was num 3.

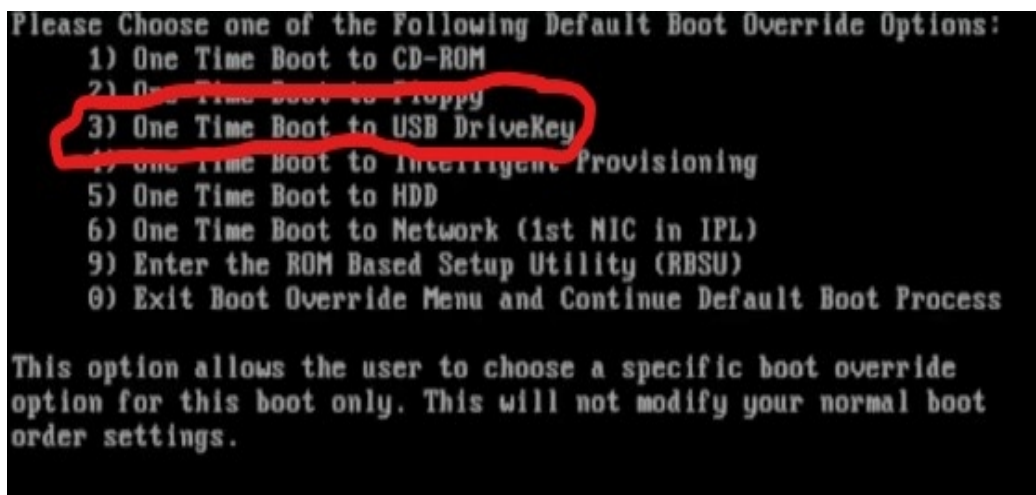





- (20) Next Alma Linux will boot to the install selection screen. Be sure to select install almalinux – you may test and install if you are not sure if linux will run on your system.

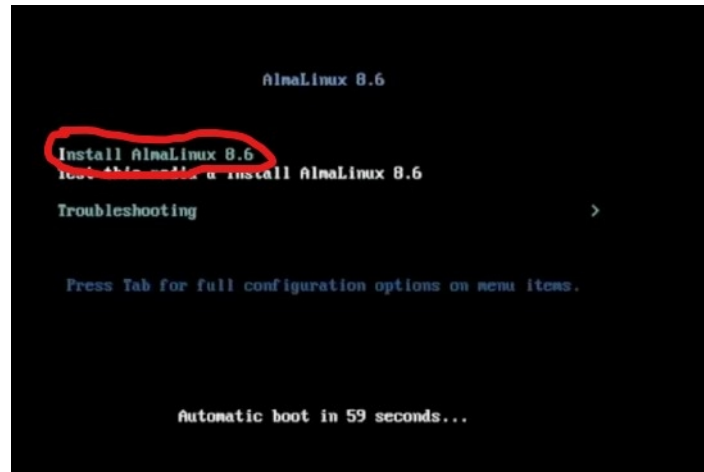


- (21) AlmaLinux will now install the installation setup. When its finished it will open up the install screen.  
-From here we want to edit 3 things( **Installation Destination,Root Password,and User Creation**) circled in red.

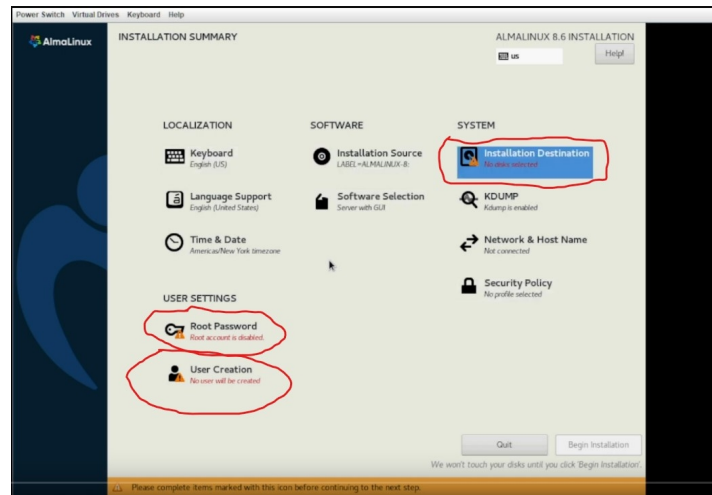


- (22) For the first thing (**Installation Destination**) we want to wipe our hddrives and install a new OS.  
- To accomplish this we must click on (Installation Destination)  
- Select the (Disk) we want to clean and install the (OS) on.

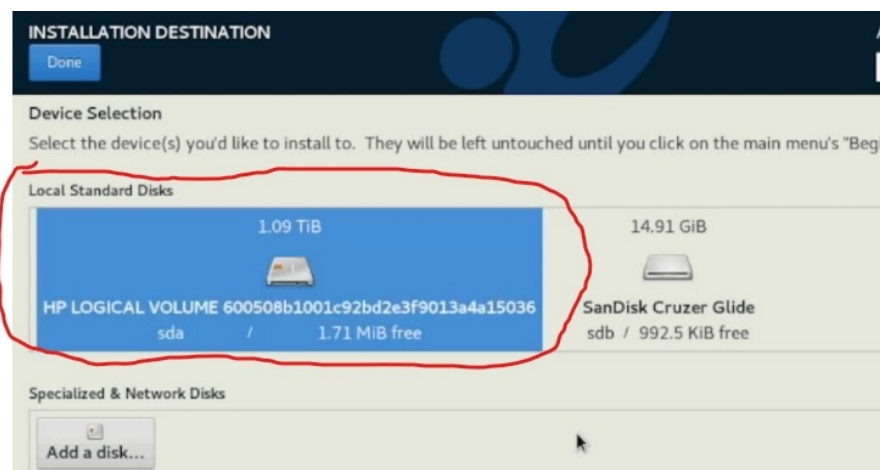


(23) Click (Done) at the top left of your screen.

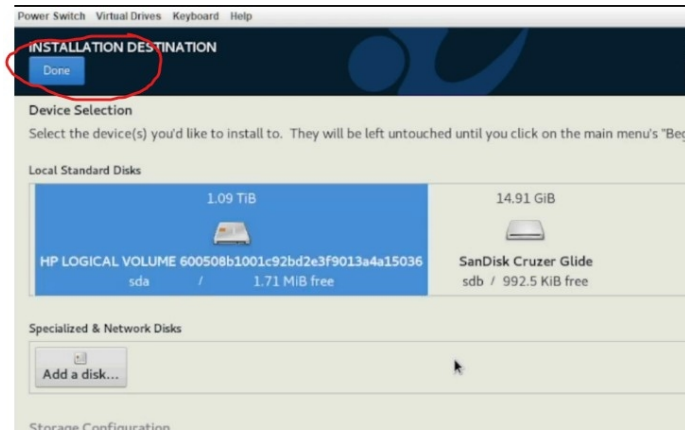

(24) Next a (Installation Options) window will pop up requesting your permission to reclaim space.  
- Click on ( Reclaim Space) to continue.

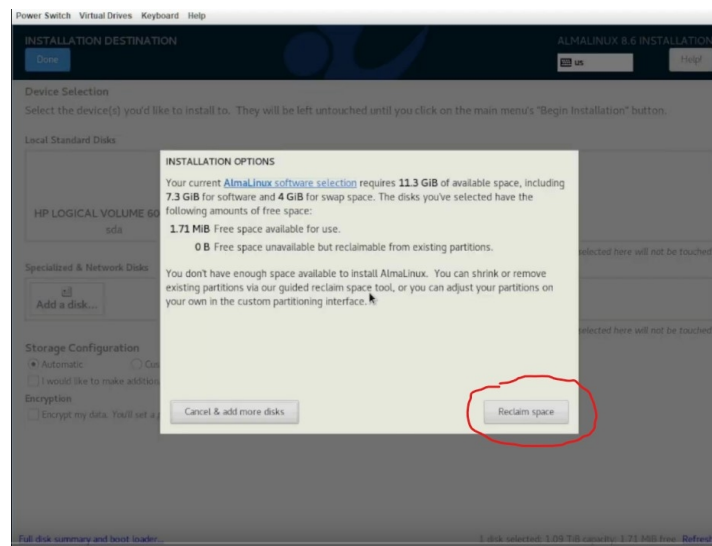


(25) The window now switches to the (RECLAIM DISK SPACE) window.  
-Select (Delete All)

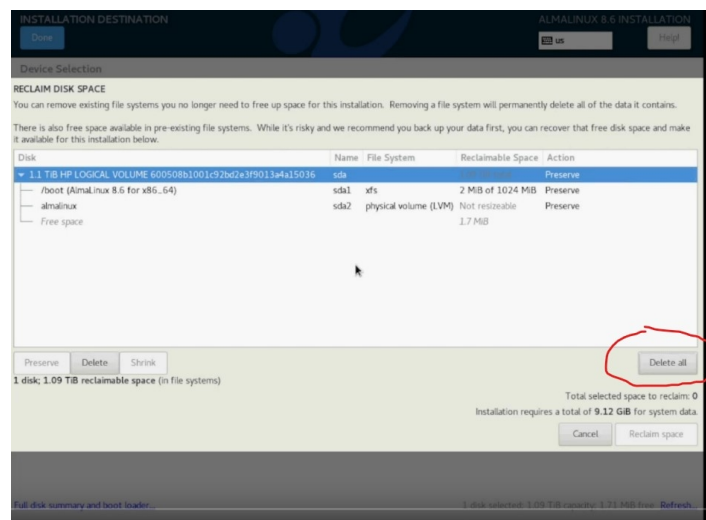





(26) The option to (Reclaim Space) will now be selectable. Click on that.

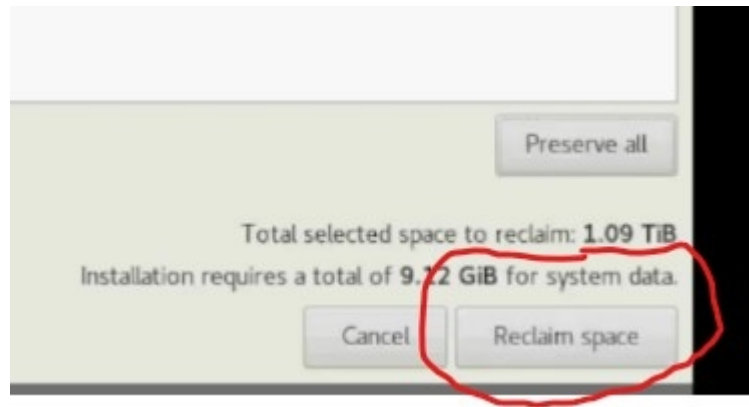


(27) This will bring us back to the (Installation Summary) screen.  
-Next we will move to the (User Creation) Click on that.

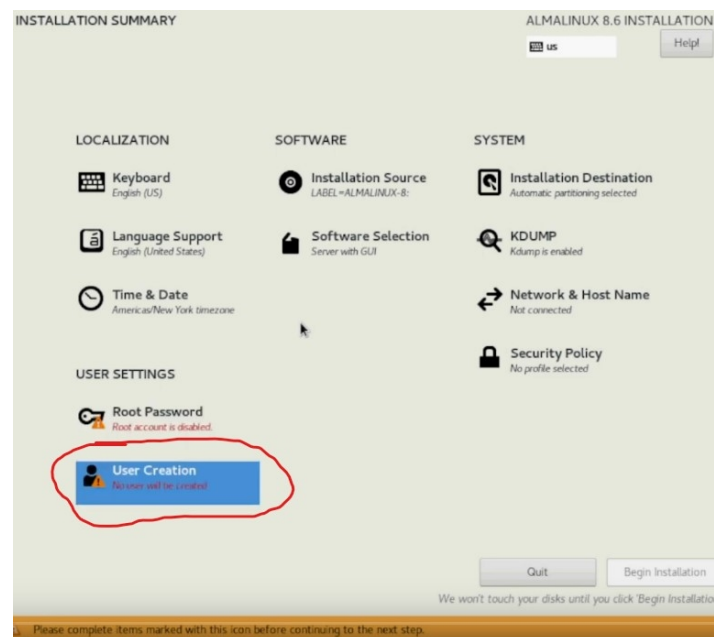


(28) Now that were on the (Create User) screen lets fill in our credentials and make sure the checkbox (Make this user administrator) is checked.  
- For (**Full name**) we will use (**swg**), and for (**User name**) we will use (**swg**).  
- For (Password) **NOTE**:Use whatever you like make it secure by using a mix of symbols letters and numbers.  
- When you are finished Click (DONE).

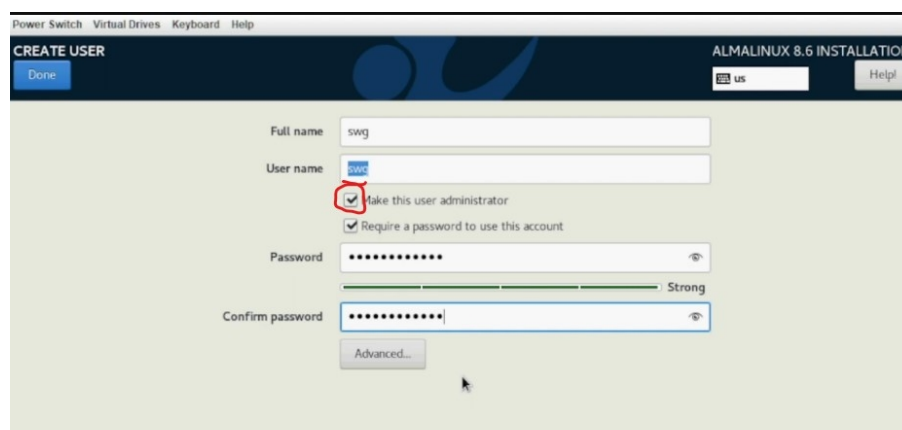


(29) Now we will be back on the (Installation summary) screen. We will now want to setup our root password so select the (Root Password) Option under (User Settings).

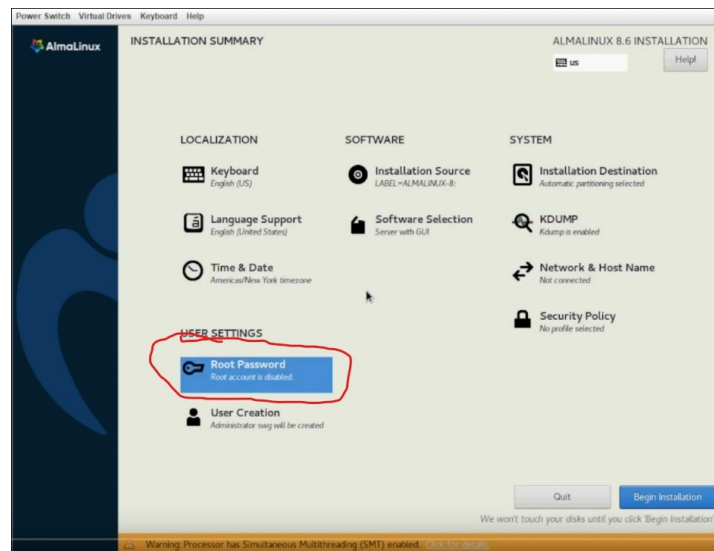


(30) This brings us to the (Root Password) screen. Fill out the root password with something strong and click (Done).

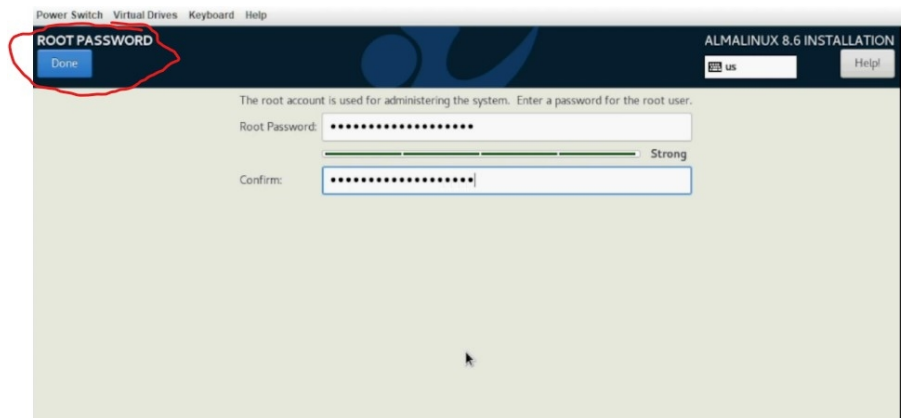


(31) Now we are cooking and the installation process will begin. **Note:** This may take a little bit.

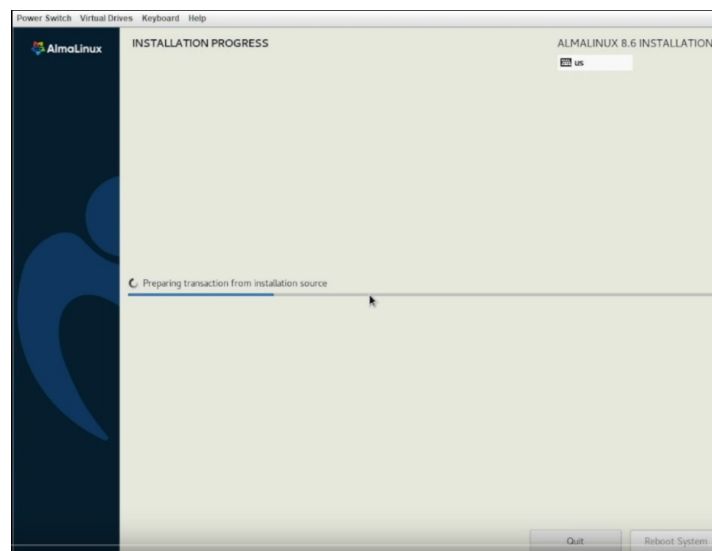


(33) As the installation comes to a complete Click the (Reboot Server) button and reboot.

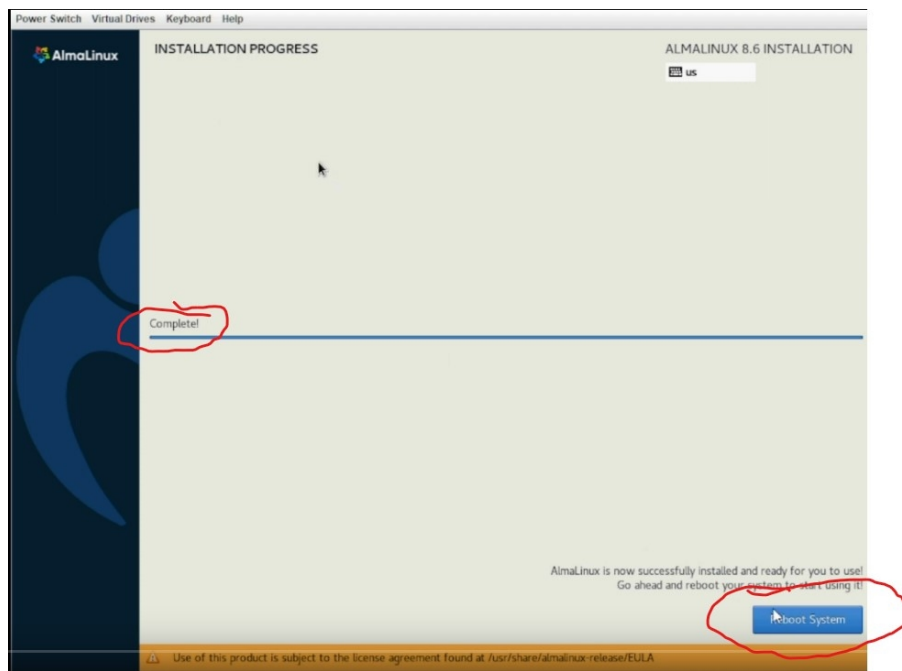


(34) Upon reboot during the post remove the USB Drive and Let Linux boot.

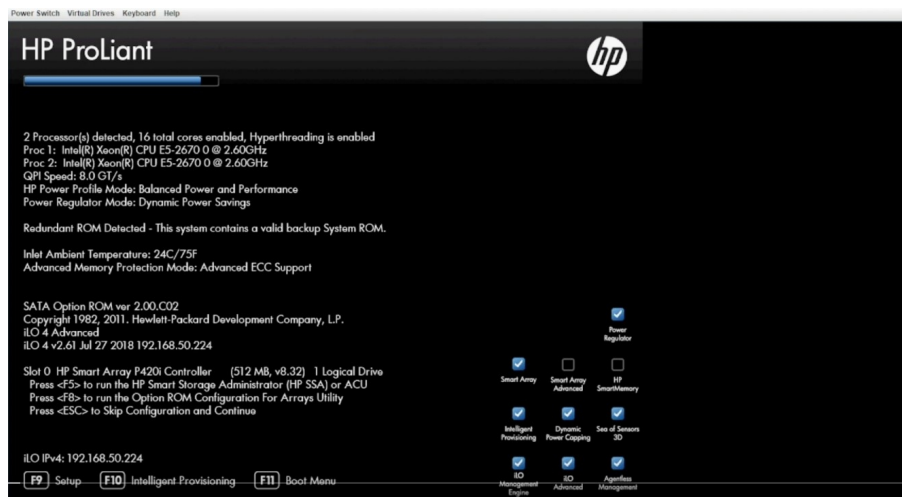


(35) Once AlmaLinux loads you will be prompted with a (EULA) button. Select That and you will move to the (EULA) screen.

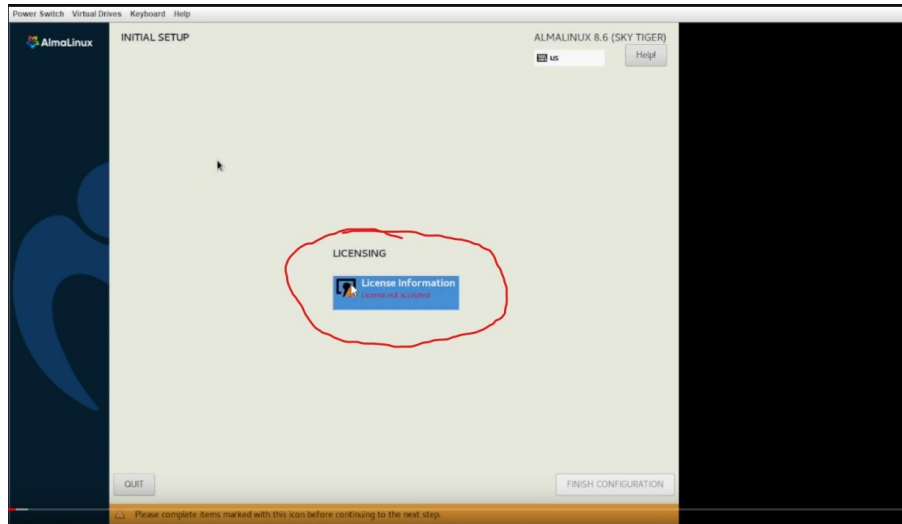


(36) In the (EULA) screen select the (I accept the liscense agreement) checkbox and click (Done) at the top left.

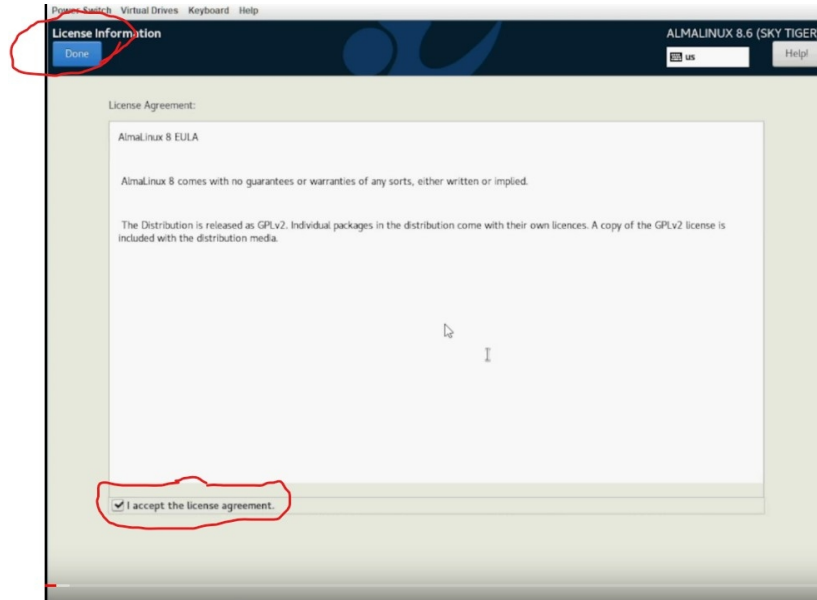

(37) Now were back on the (Initial Setup) screen with our liscense excepted Click (Finish configuration).

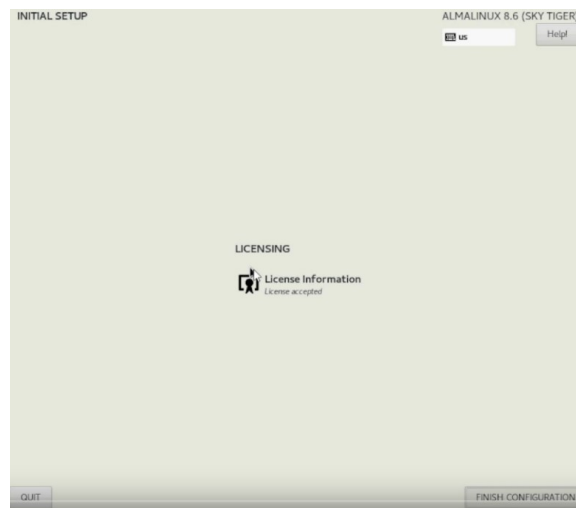


(38) Now we're on the (Login Screen). Select your User Name and hit enter.

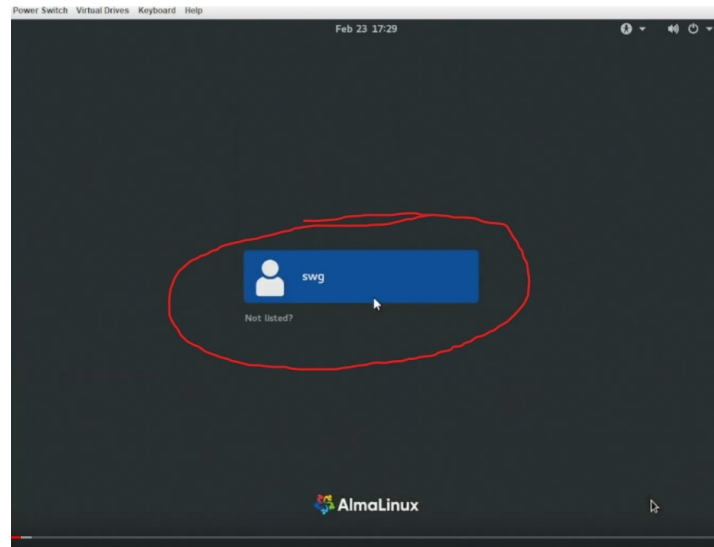

(39) Now you will be prompted for your User Account password (Not your root password). Type it in and click (Sign In).



(40) **Congratulations !** If everything was successful you should now be on the desktop of your new AlmaLinux 8.6 OS.  
- The next steps in the guide will be setting up for and installing the SWG Server.

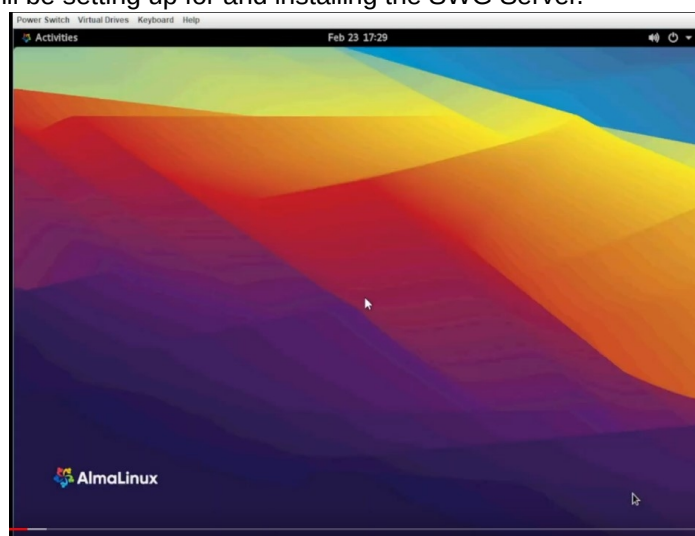

To Be Continued .....

This guide is still being developed and added to.

Guide is unfinished till this page is gone.