

Installing a different OS on Raspberry Pi




In the CanaKit a microSD Card reader is provided for you. Go ahead and open it up and set it aside for just a moment.




Go ahead and flip the pi over, proceed to remove the SD Card in the Pi.
Grab the SD Card reader and remove the cover.




There is a little slot in the usb for the SD Card, insert the SD Card into the slot.

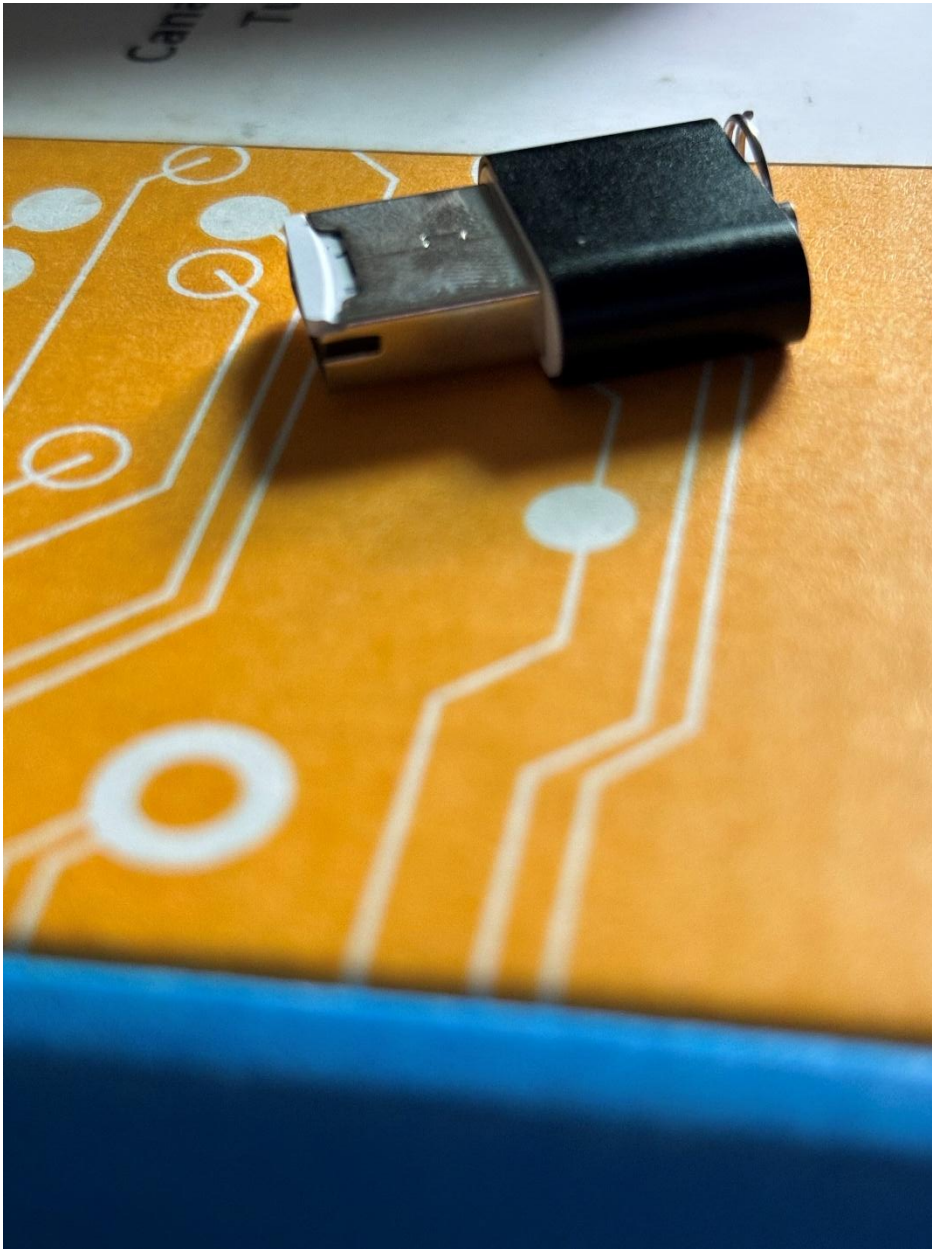

It should look like this when its fully in.

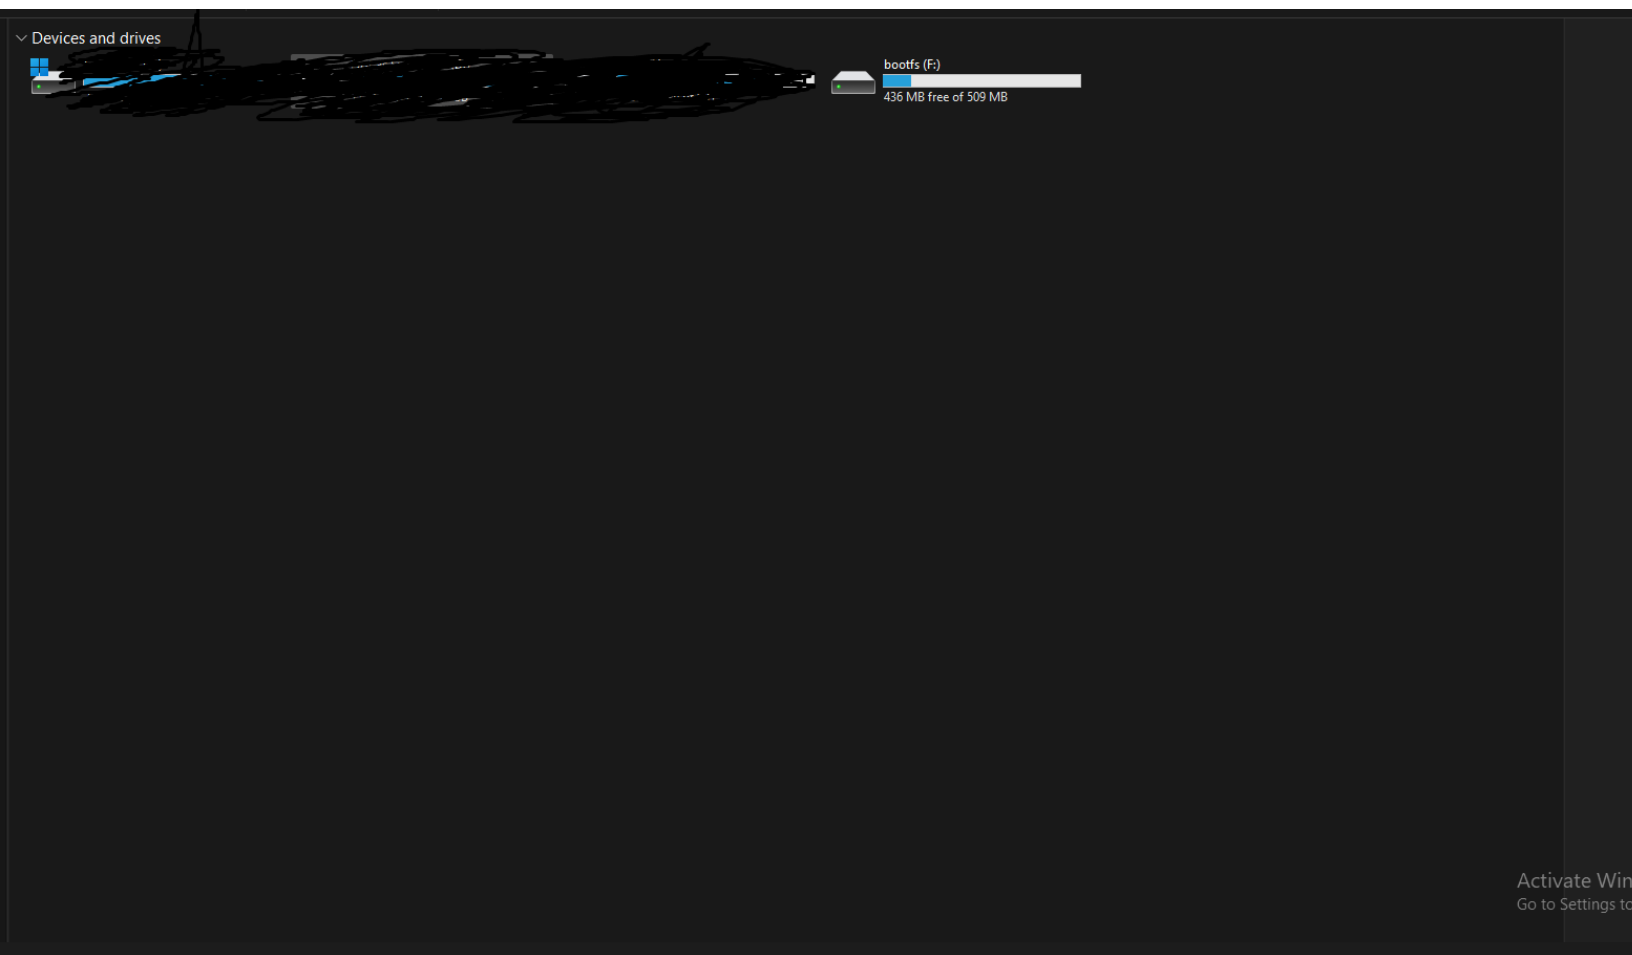


Plug the SD Card reader into a USB port on your computer, you'll notice it says only 509 MB of storage on the card, that will change once we format it. You will also notice its (F:). This will help you remember which drive to select when formatting.

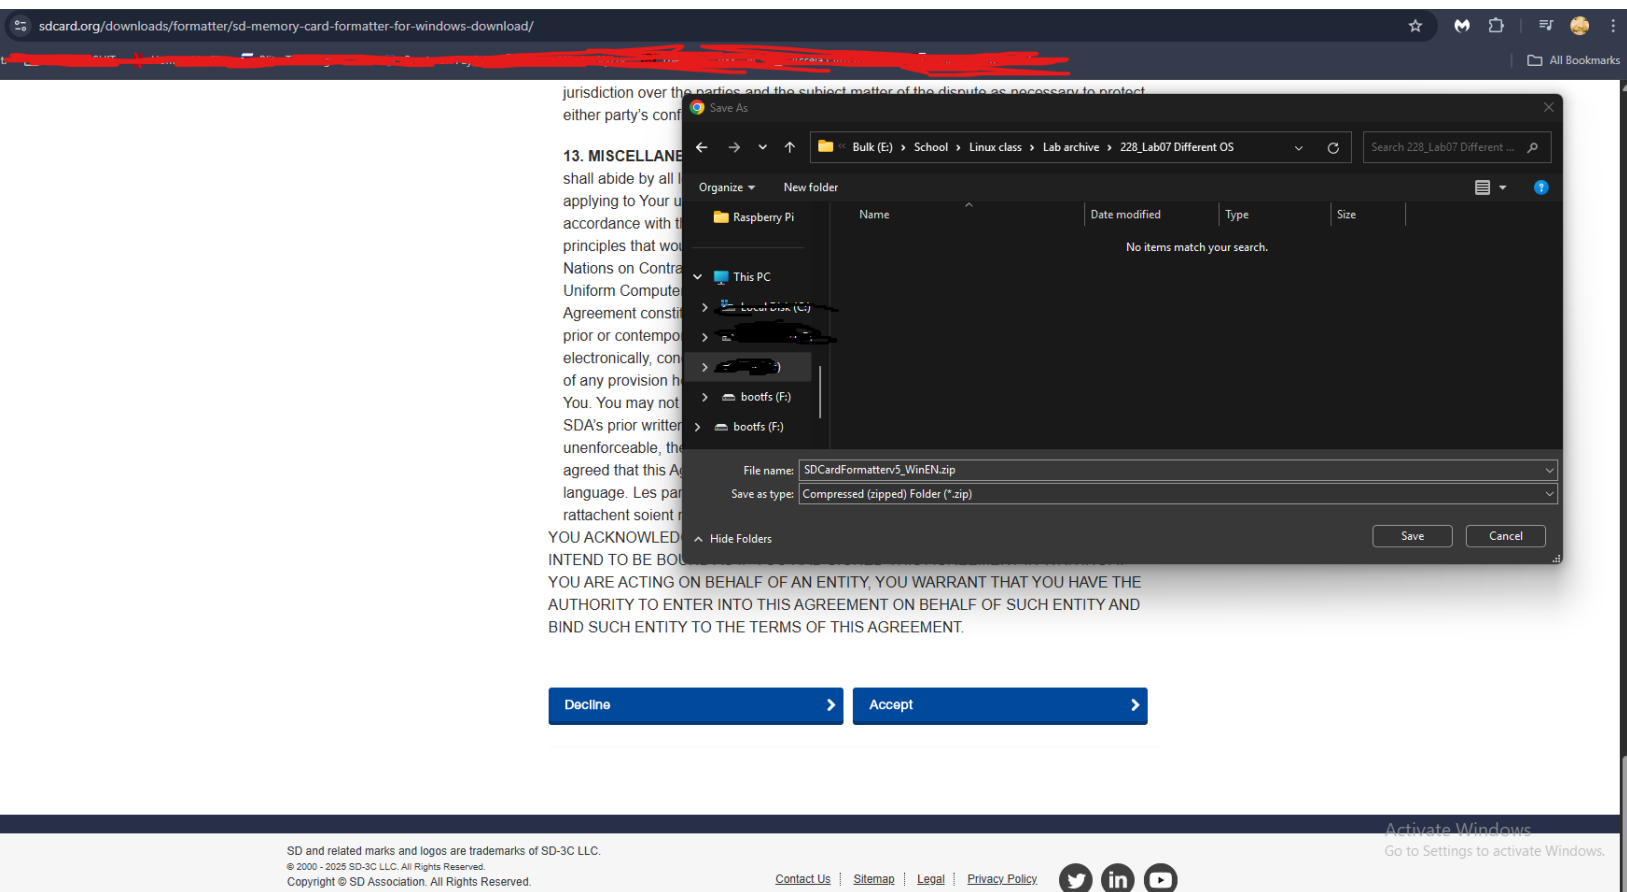


For the SD Card formatting software I went to

<https://sdcard.org/downloads/formatter/sd-memory-card-formatter-for-windows-download/>


Click accept and the zip file containing the software installer will download.

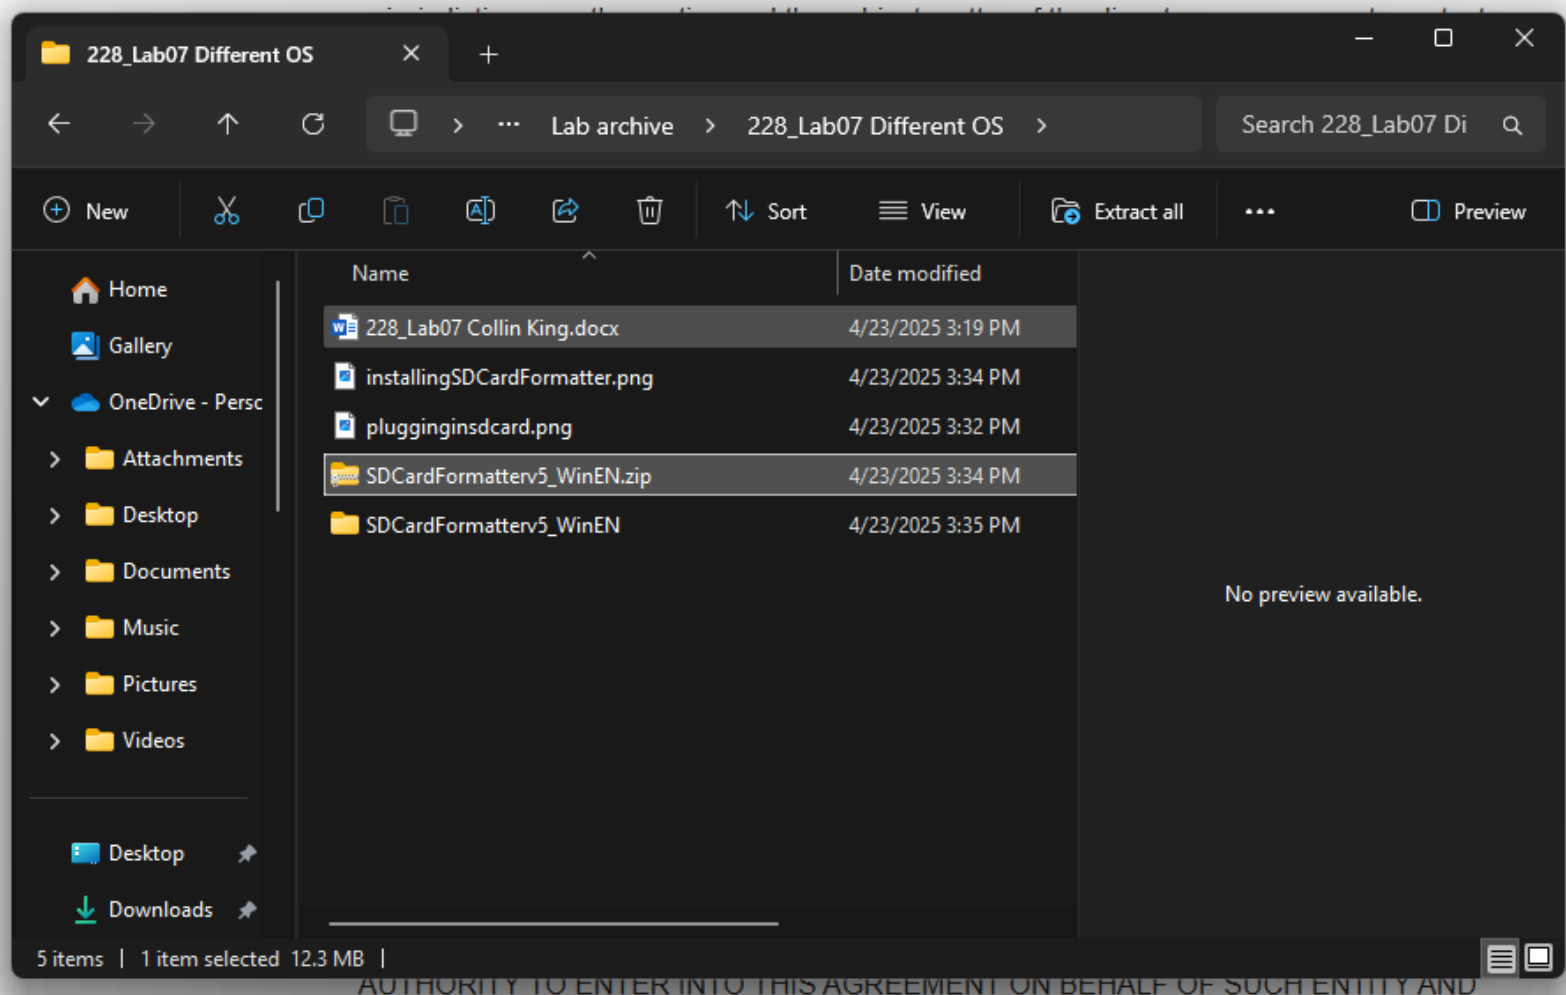


Extract the zip file.

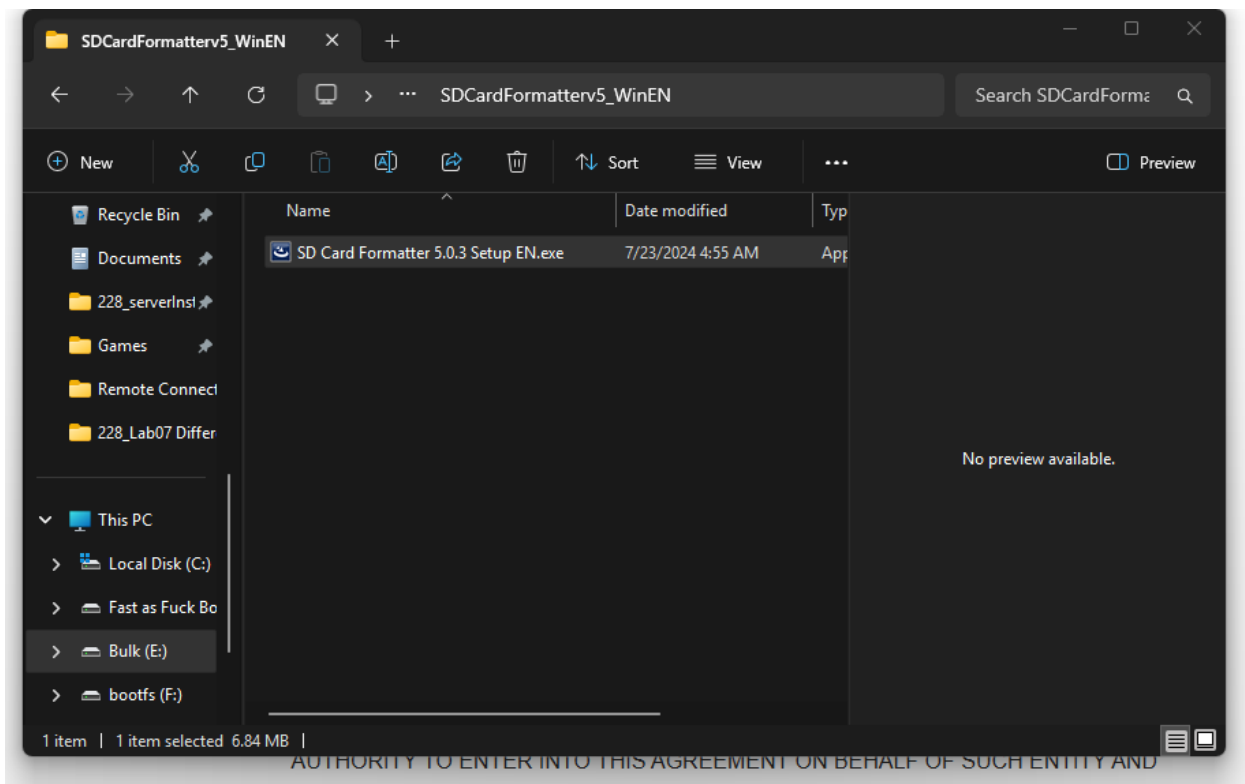


There is a sub folder called “SDCardFormatterv5_WinEN”. Go into that folder as it contains the SD Card formatter installation. Run the software.

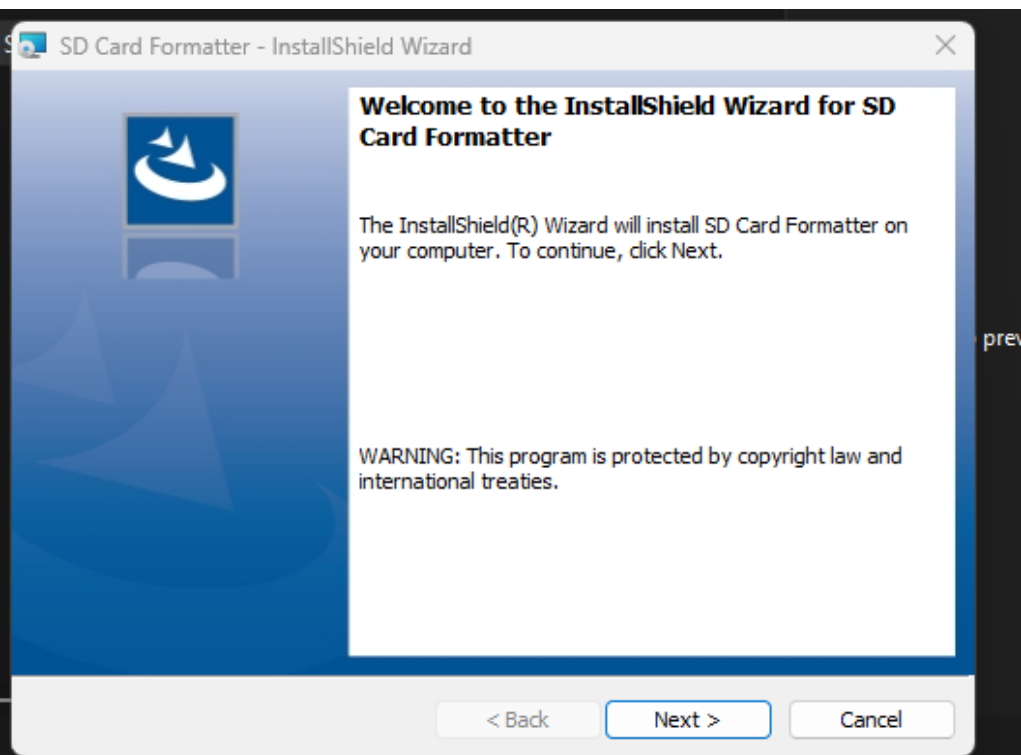


Click next.

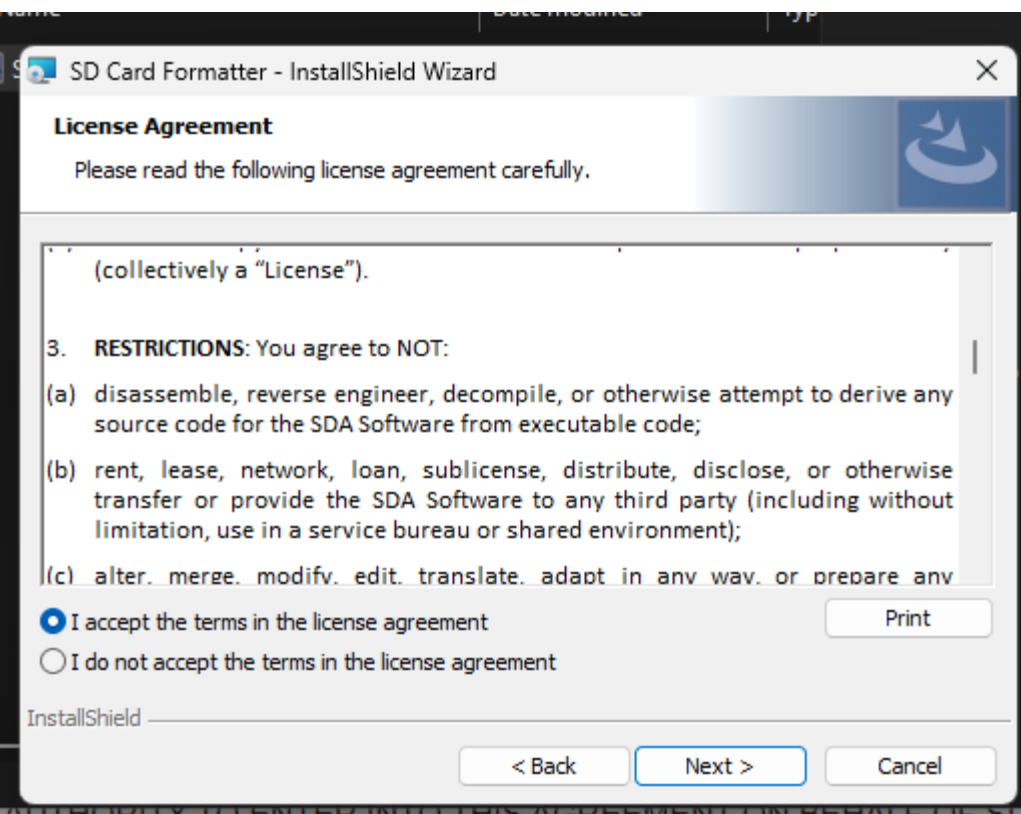


Click accept and click next.

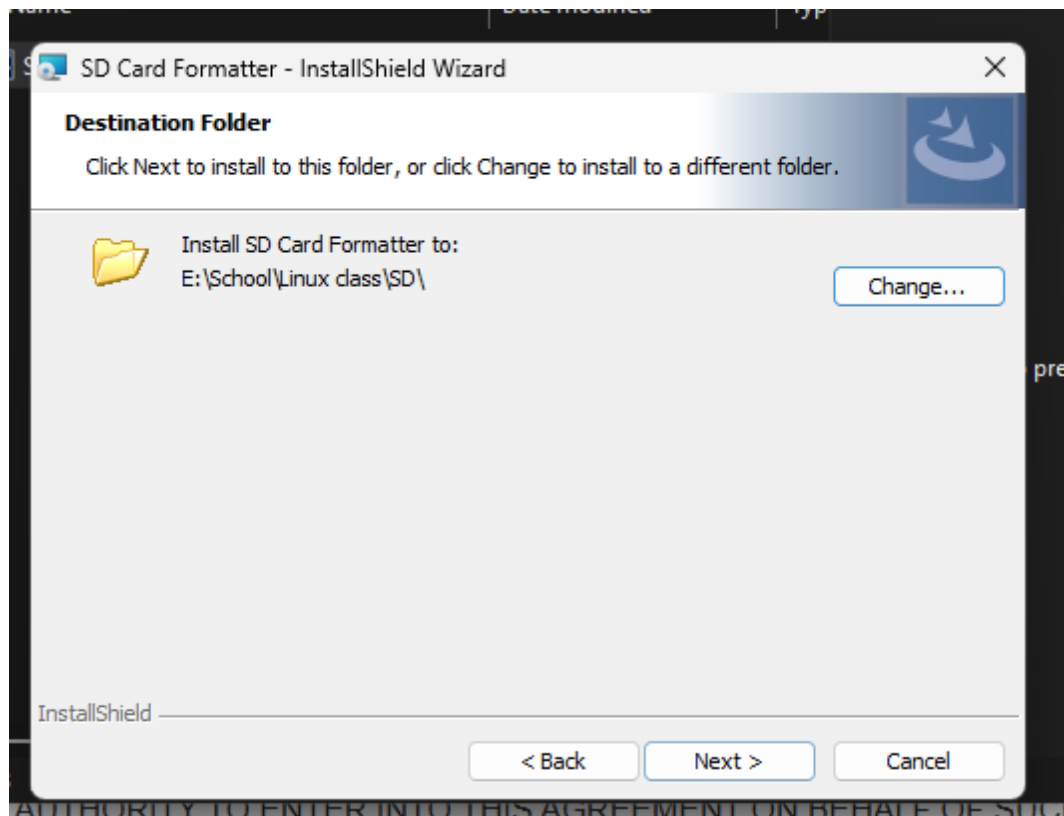


Pick an installation location, I created a folder just for the installation so that is where I will be installing it.

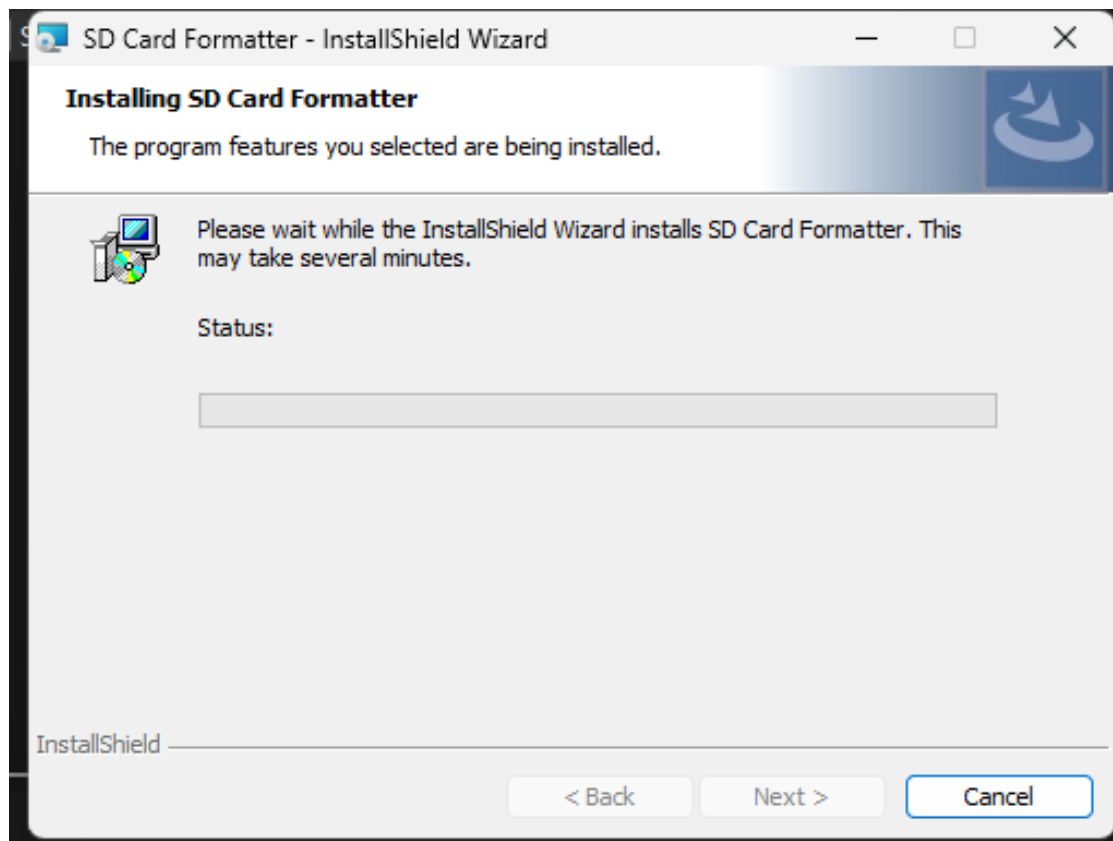

Click next and wait for installation.

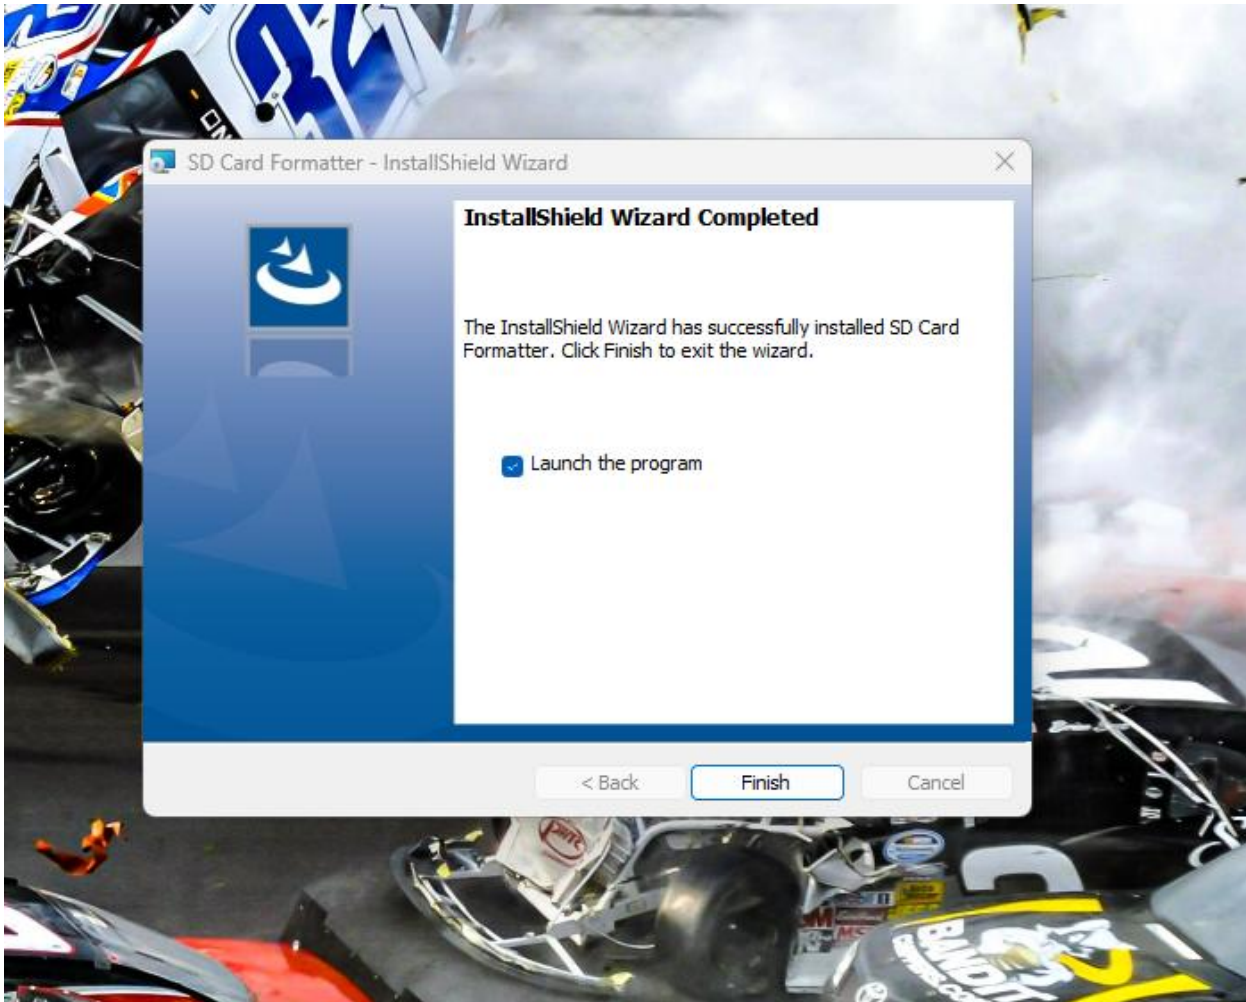


Now launch the formatter.

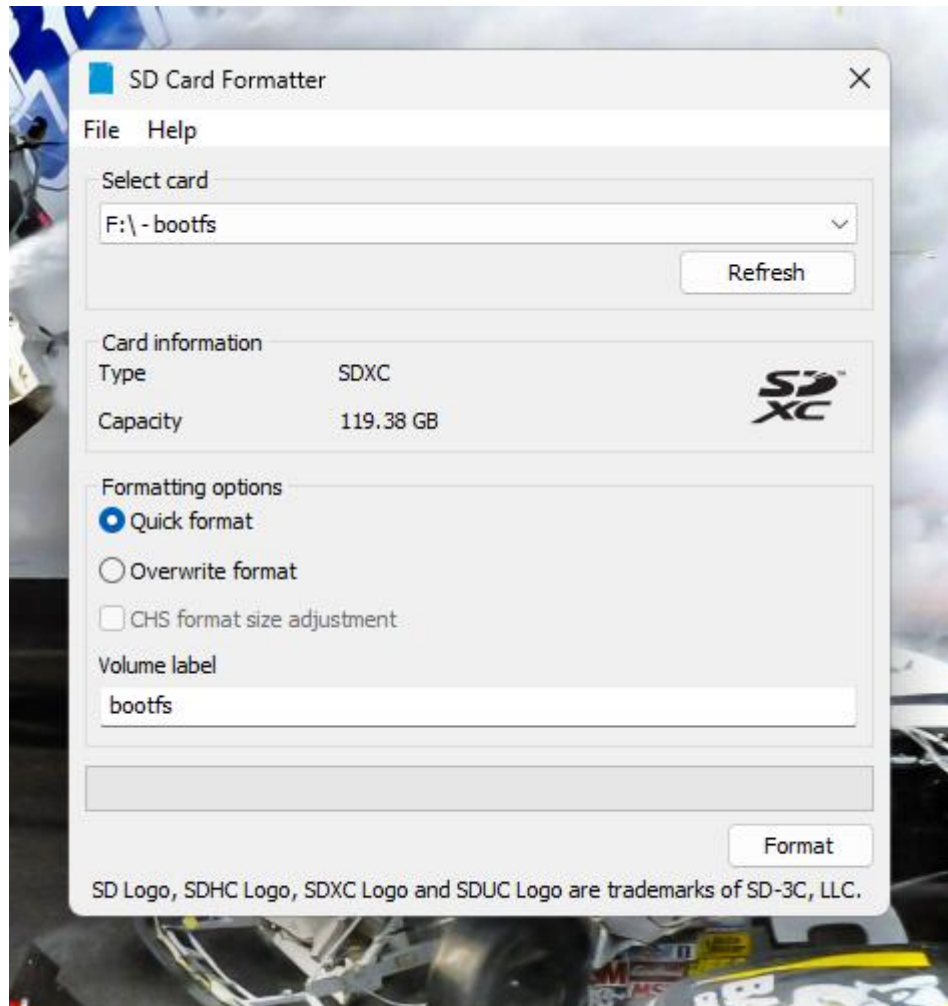

Make sure you have the SD Card selected in the select card drop list. As shown in the documentation, my SD Card is (F:).

Click the format button at the bottom to begin.

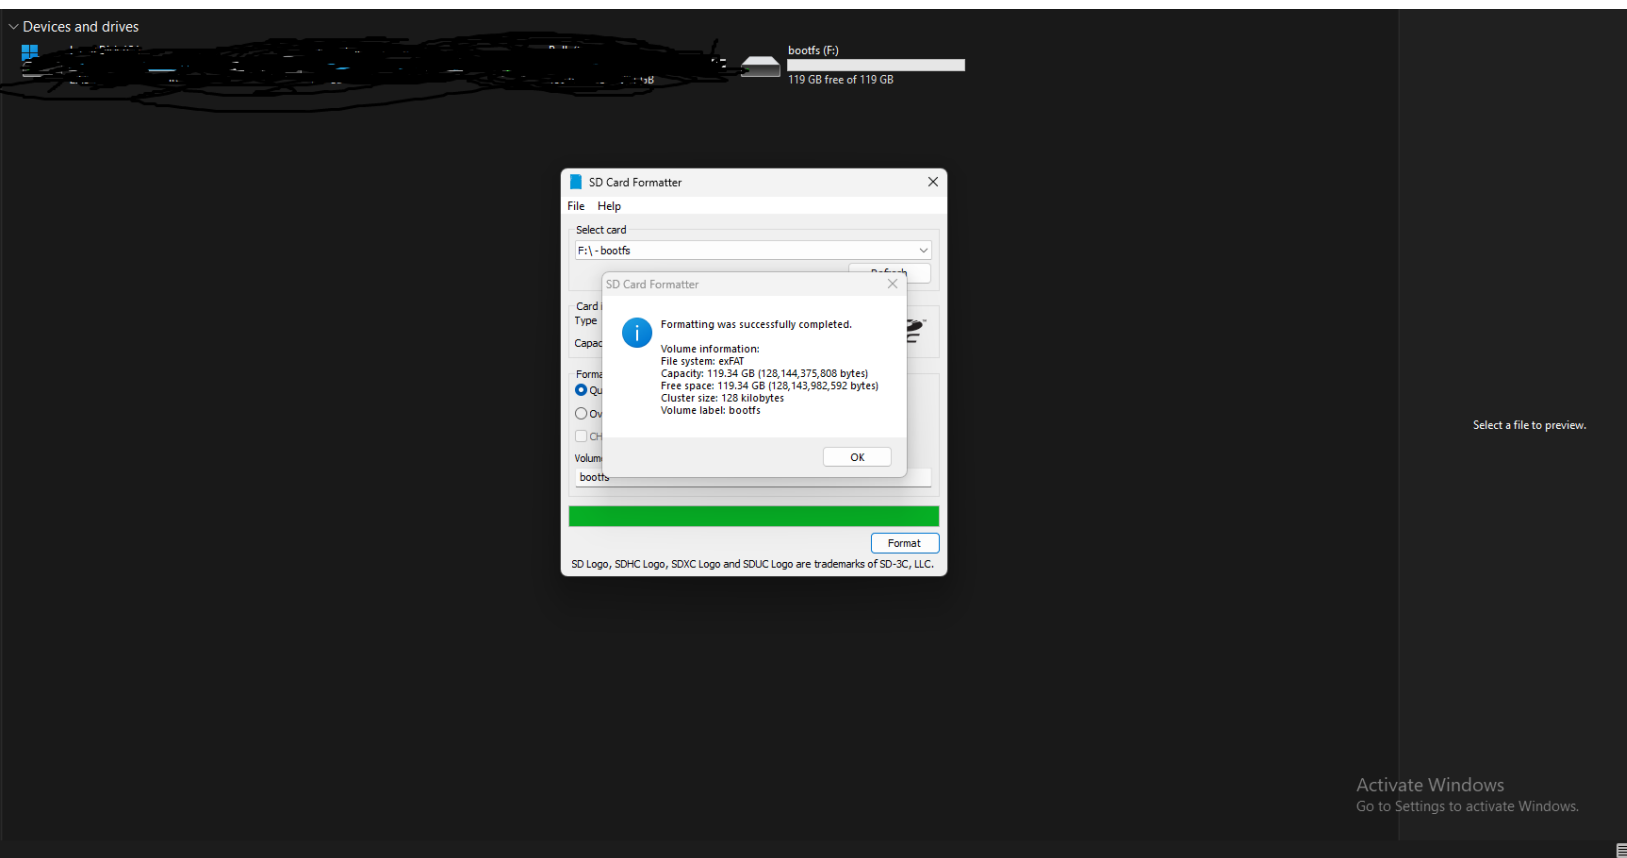

Now we have a completely wiped SD Card with the right amount of capacity.

Next we are going to install Pi imager.

0-Apr26 - Linux Adm x Raspberry Pi OS - Raspberry Pi x +

raspberrypi.com/software/

Your Raspberry Pi needs an operating system to work. This is it. Raspberry Pi OS (previously called Raspbian) is our official supported operating system.



Install Raspberry Pi OS using Raspberry Pi Imager

Raspberry Pi Imager is the quick and easy way to install Raspberry Pi OS and other operating systems to a microSD card, ready to use with your Raspberry Pi.

Download and install Raspberry Pi Imager to a computer with an SD card reader. Put the SD card you'll use with your Raspberry Pi into the reader and run Raspberry Pi Imager.

[Download for Windows](#)

[Download for macOS](#)

[Download for Ubuntu for x86](#)

To install on **Raspberry Pi OS**, type

```
sudo apt install rpi-imager
```


in a Terminal window.



Activate Windows
Go to Settings to activate Windows.

Go to <https://raspberrypi.com/software/> then scroll down until you see the download for Raspberry Pi imager. I'm using a windows computer so ill click download for Windows.

stem.

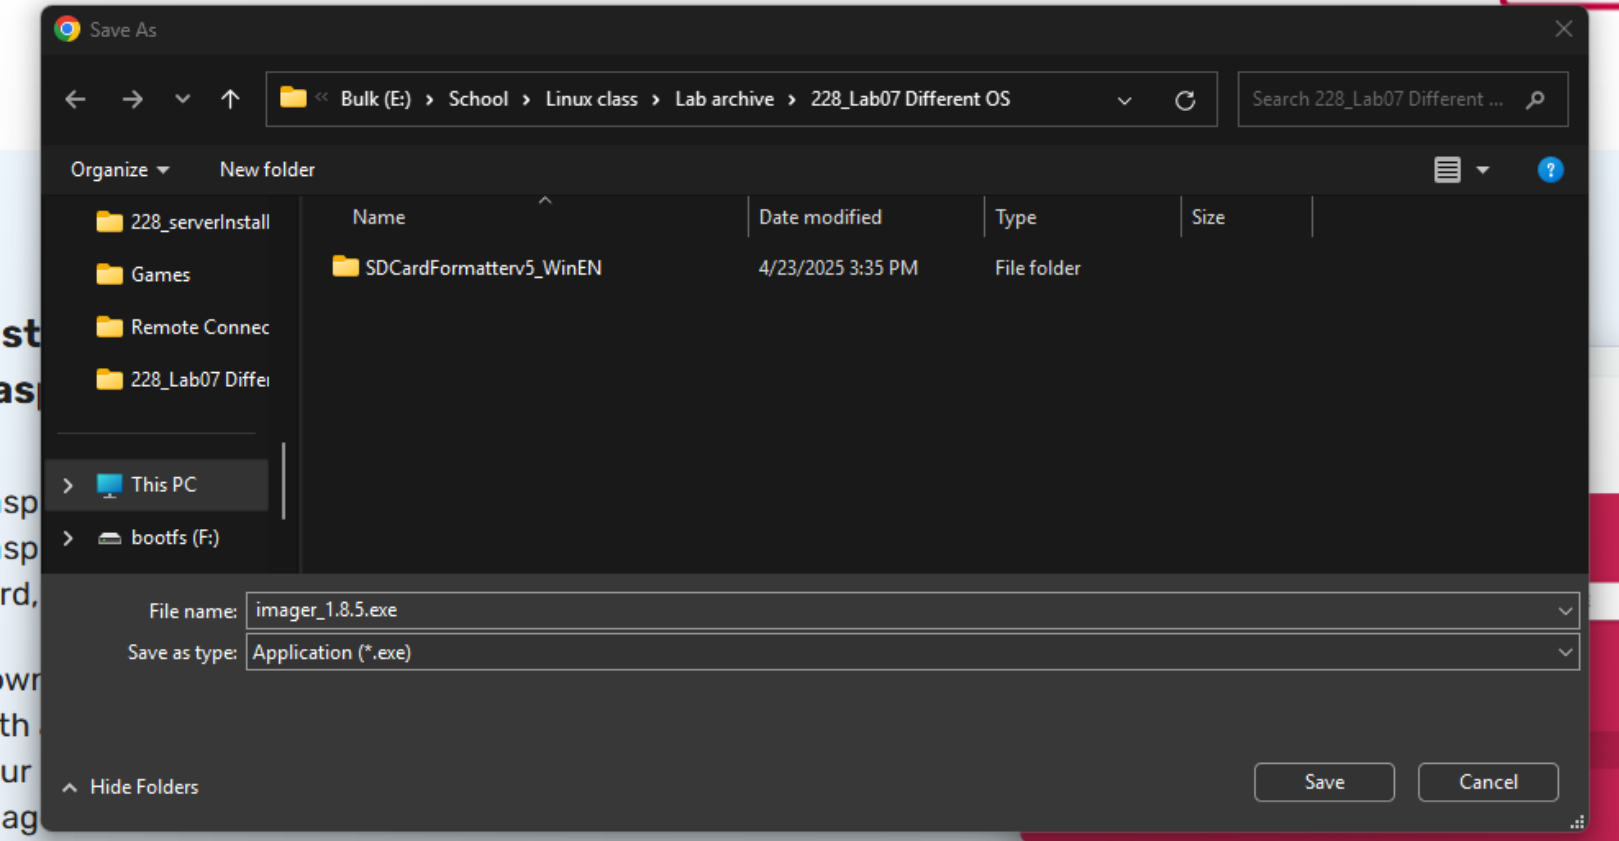


This file is an installer for the actual software, so this can be deleted afterwards.




Run the setup and click next



After the installation is finished run the Raspberry Pi Imager.

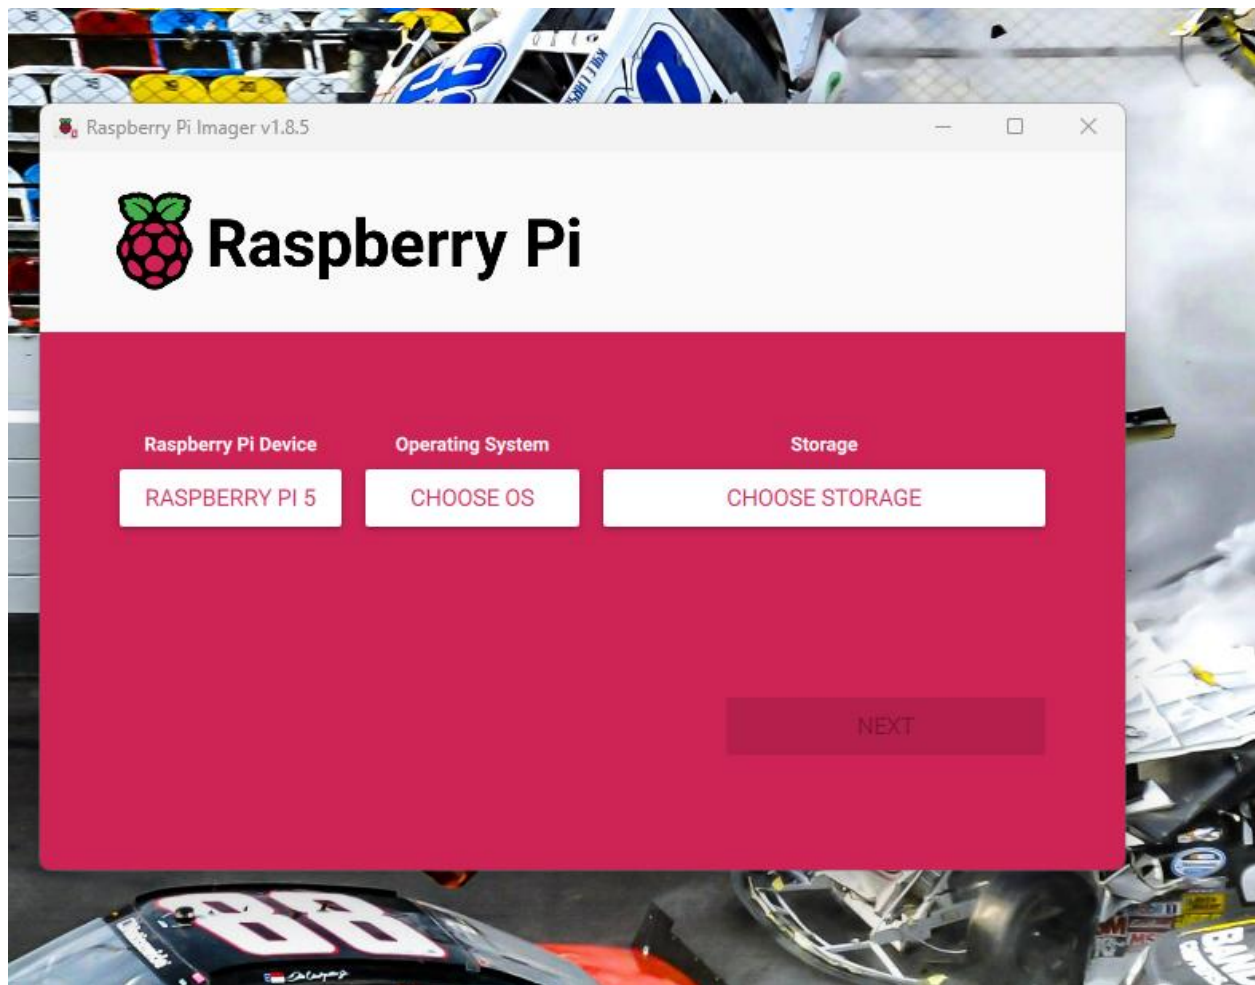


Choose the device were installing the OS on, this case we will select Raspberry Pi 5.

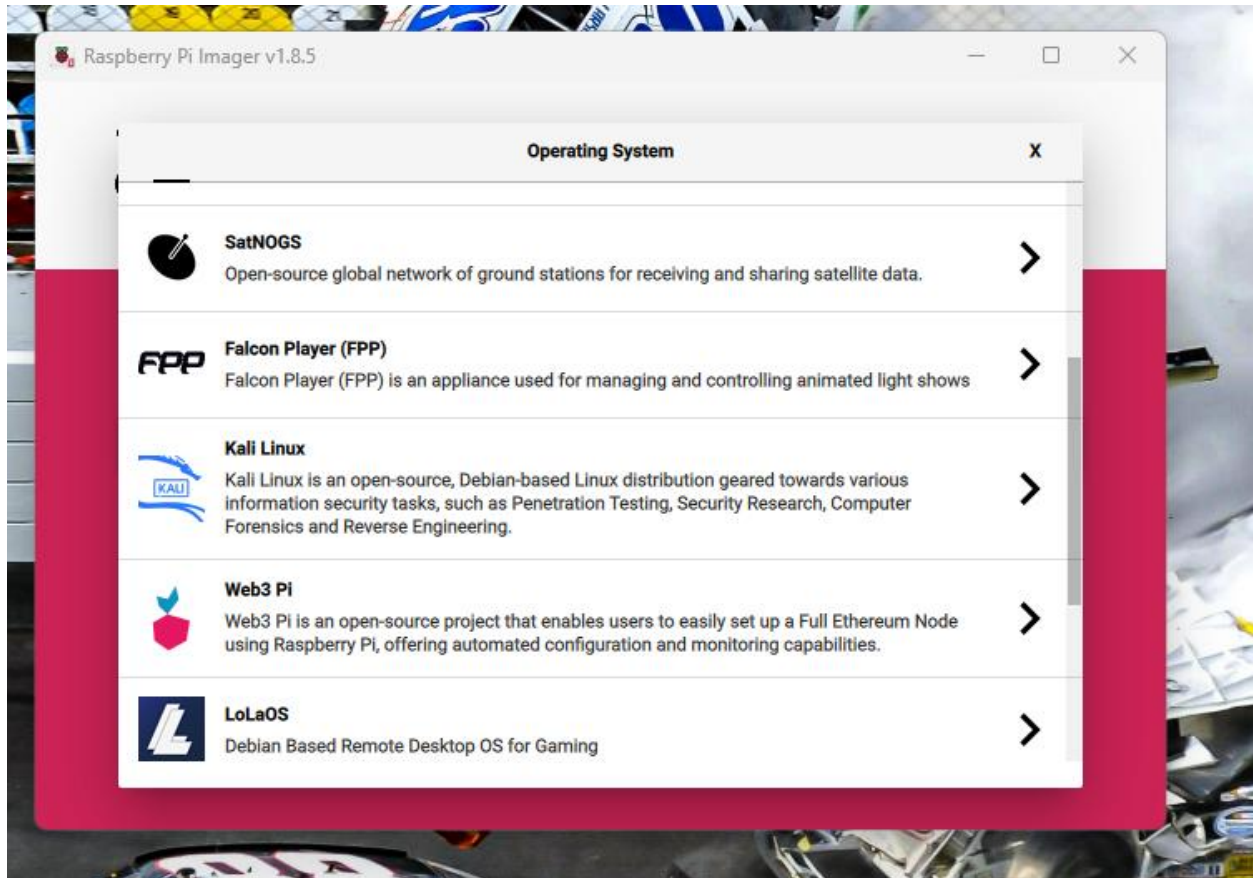


Next select the OS you'll be installing, im going to install Kali Linux because I haven't used it before and I would like to start researching the programs it has because of my Cyber Security major.


I might buy myself another Pi, a little less powerful one to build a media center via LibreELEC.

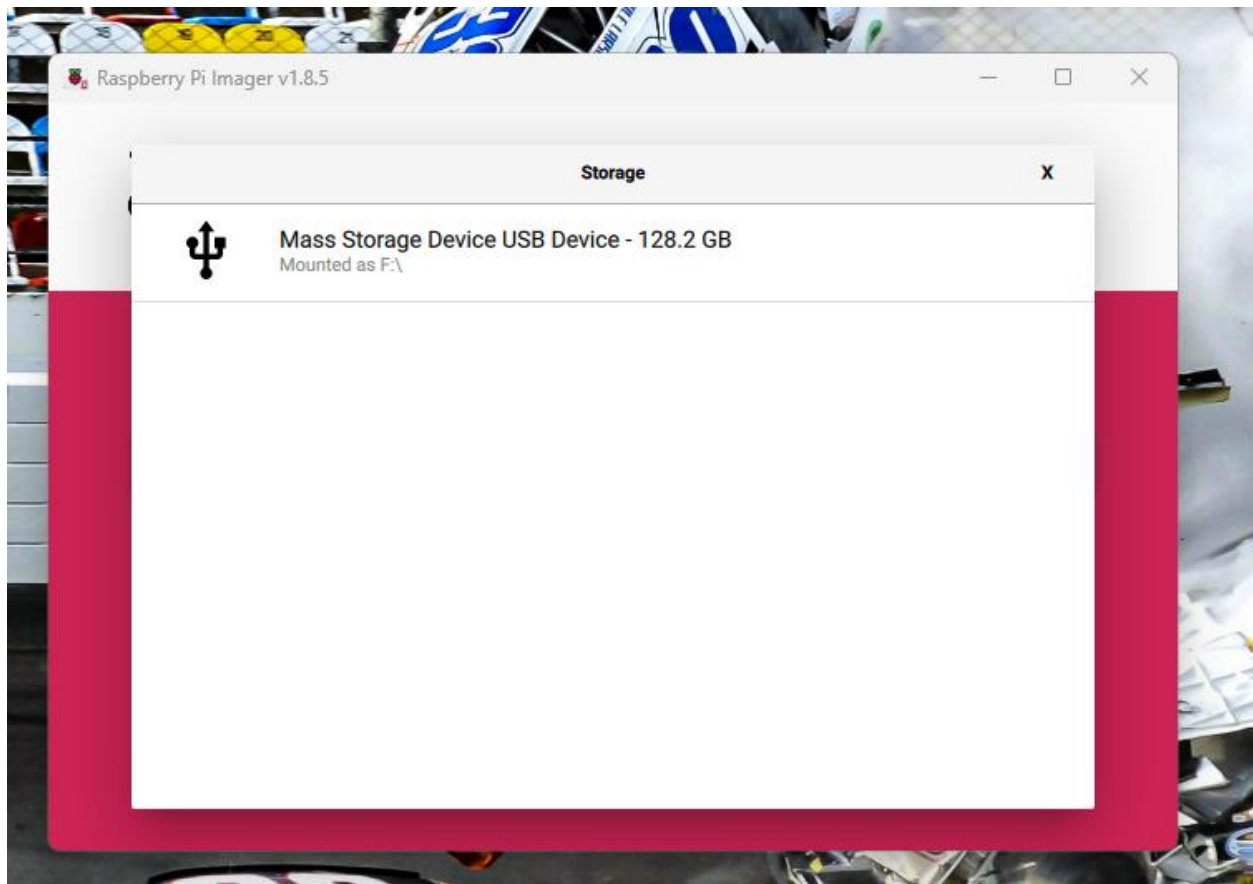


Next you can select the storage device to install the OS on, obviously in this case we will be using the SD Card.

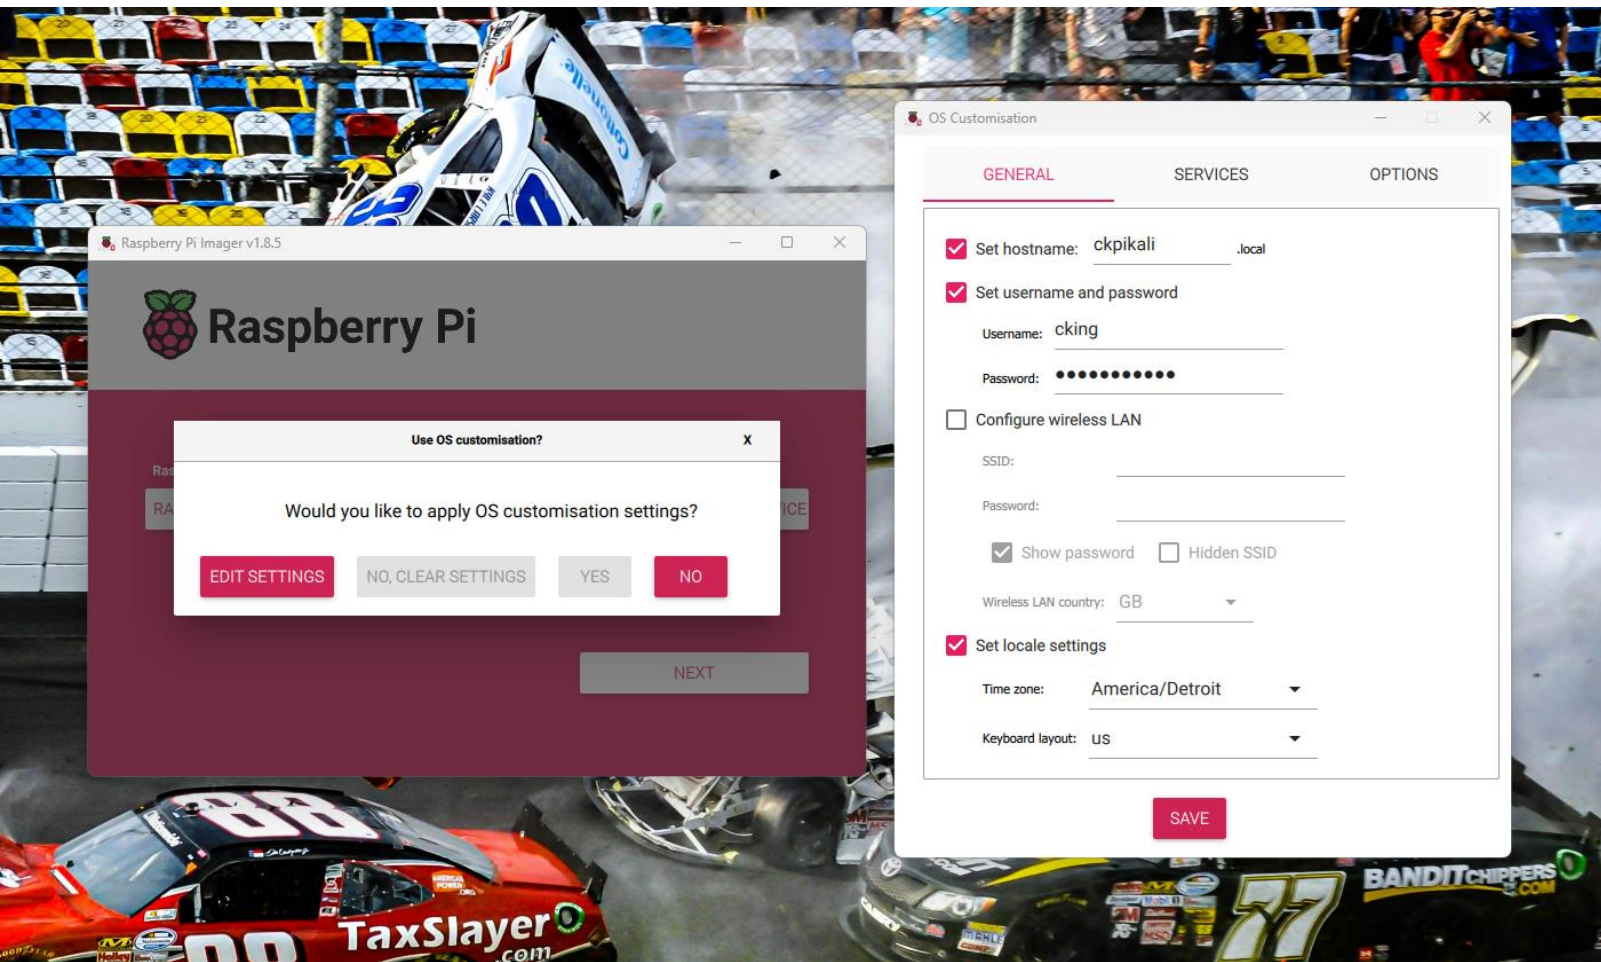


You will be prompted to setup general settings just like other Linux distributions, fill this out and click save.

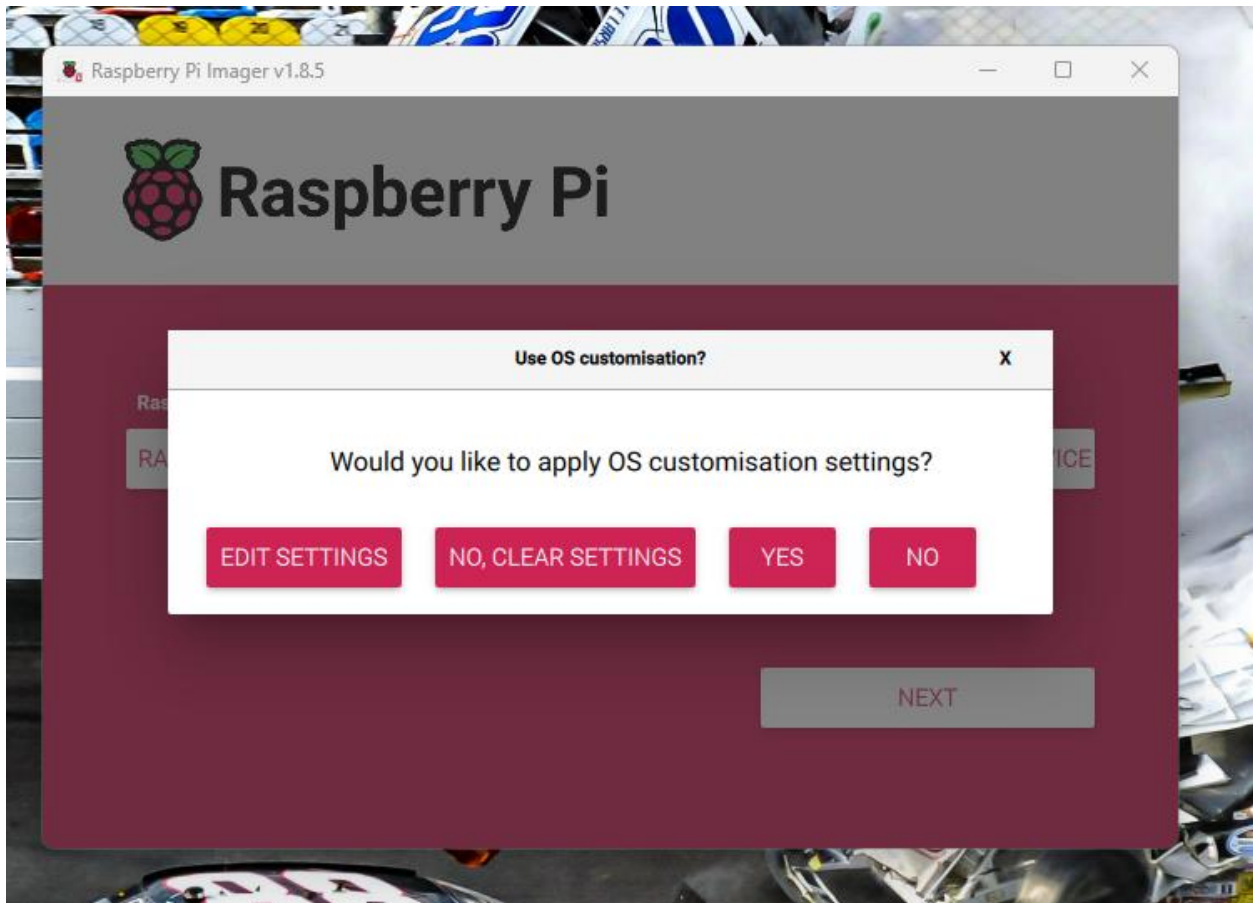

After clicking save this prompt will pop up confirming the settings, click yes.

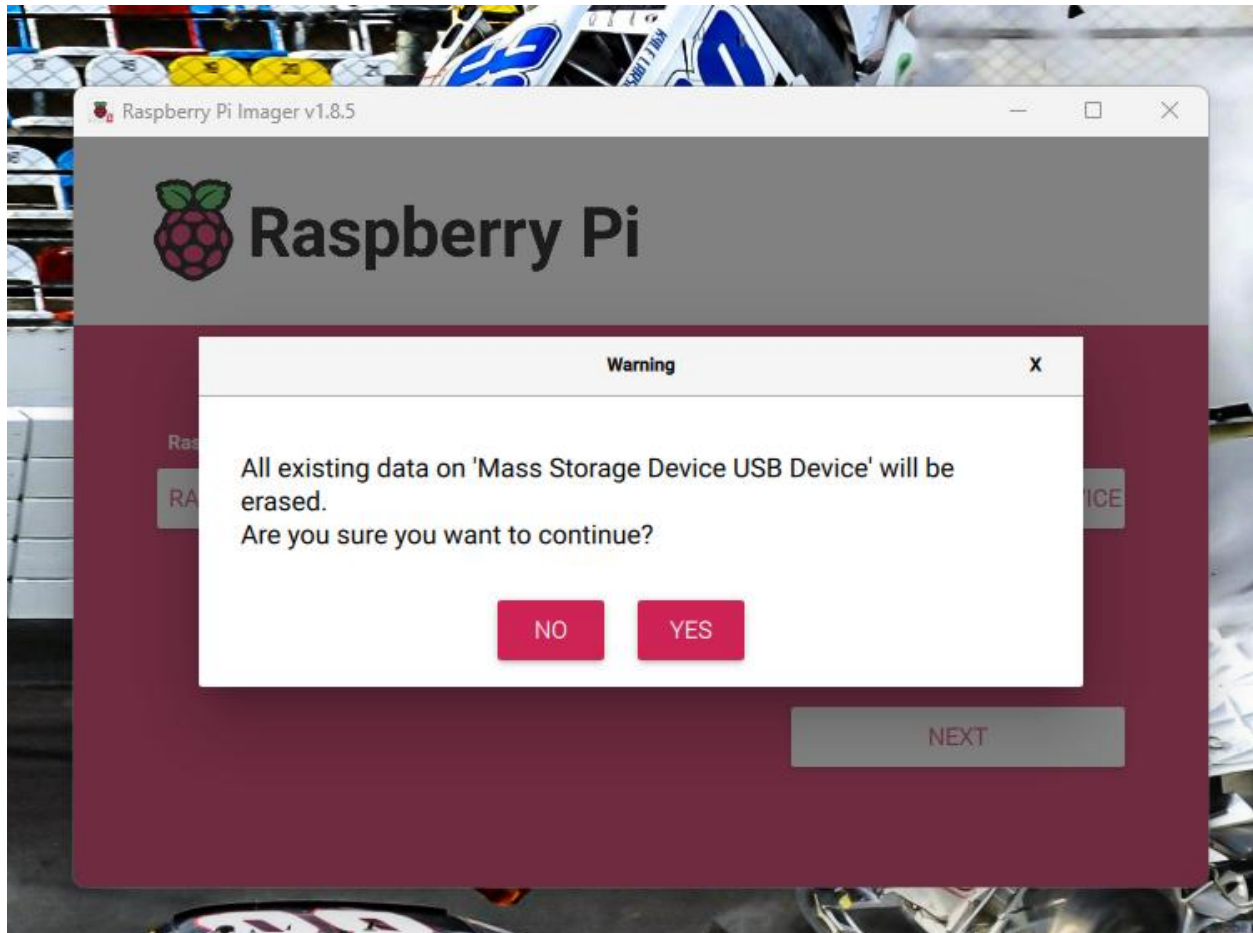

I didn't realize when I first started but the imager prompted me to erase all existing data, so I'm not too sure if this means installing the SD Card formatter can be skipped, but I think it does considering before the format it showed 500 MB of data available, but after the format it showed 119 GB.

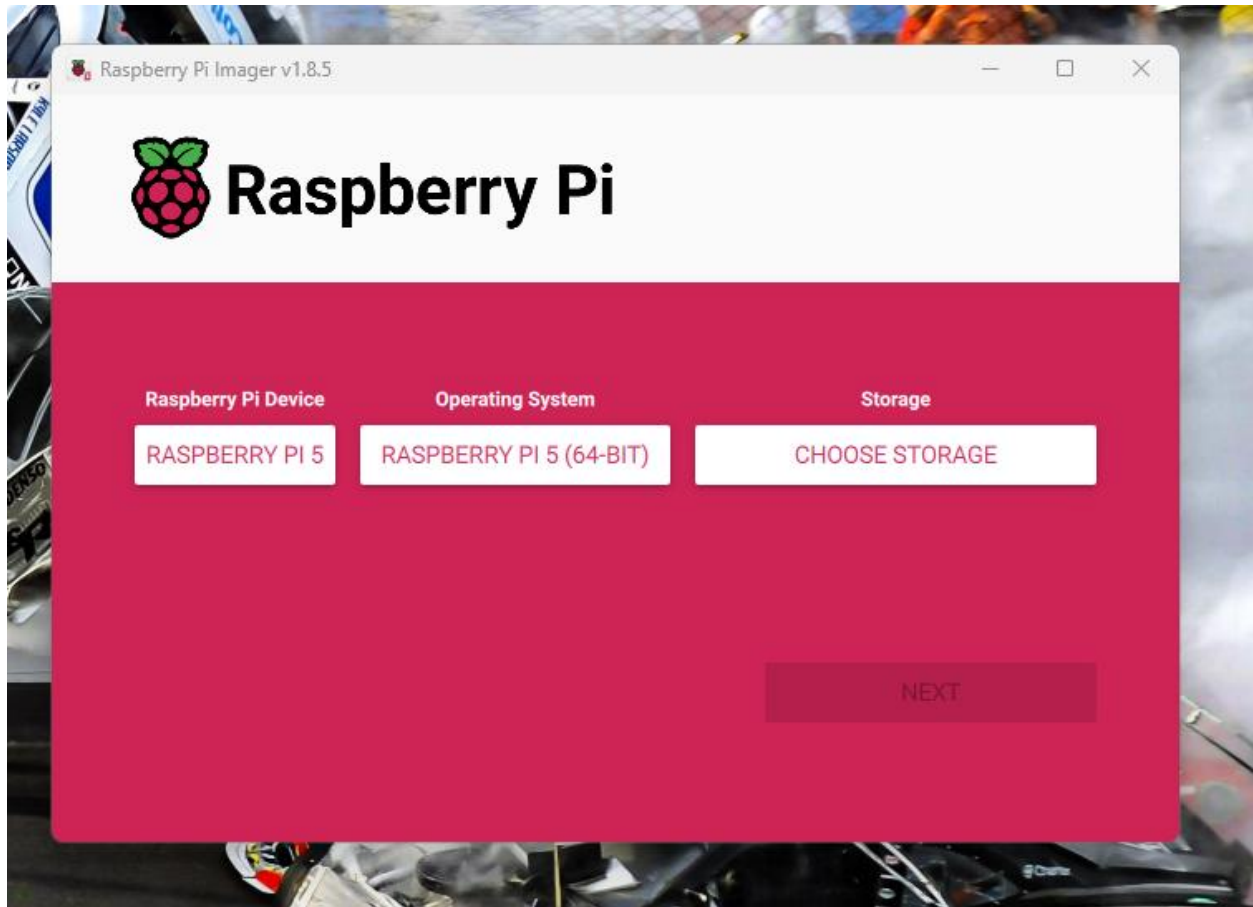


After the installation you can remove the SD Card reader from your computer and close the imager.




Next you can remove the SD Card reader from the computer, then put the SD Card back into the Pi.

Set the Pi back up and power it on, let the system boot up.

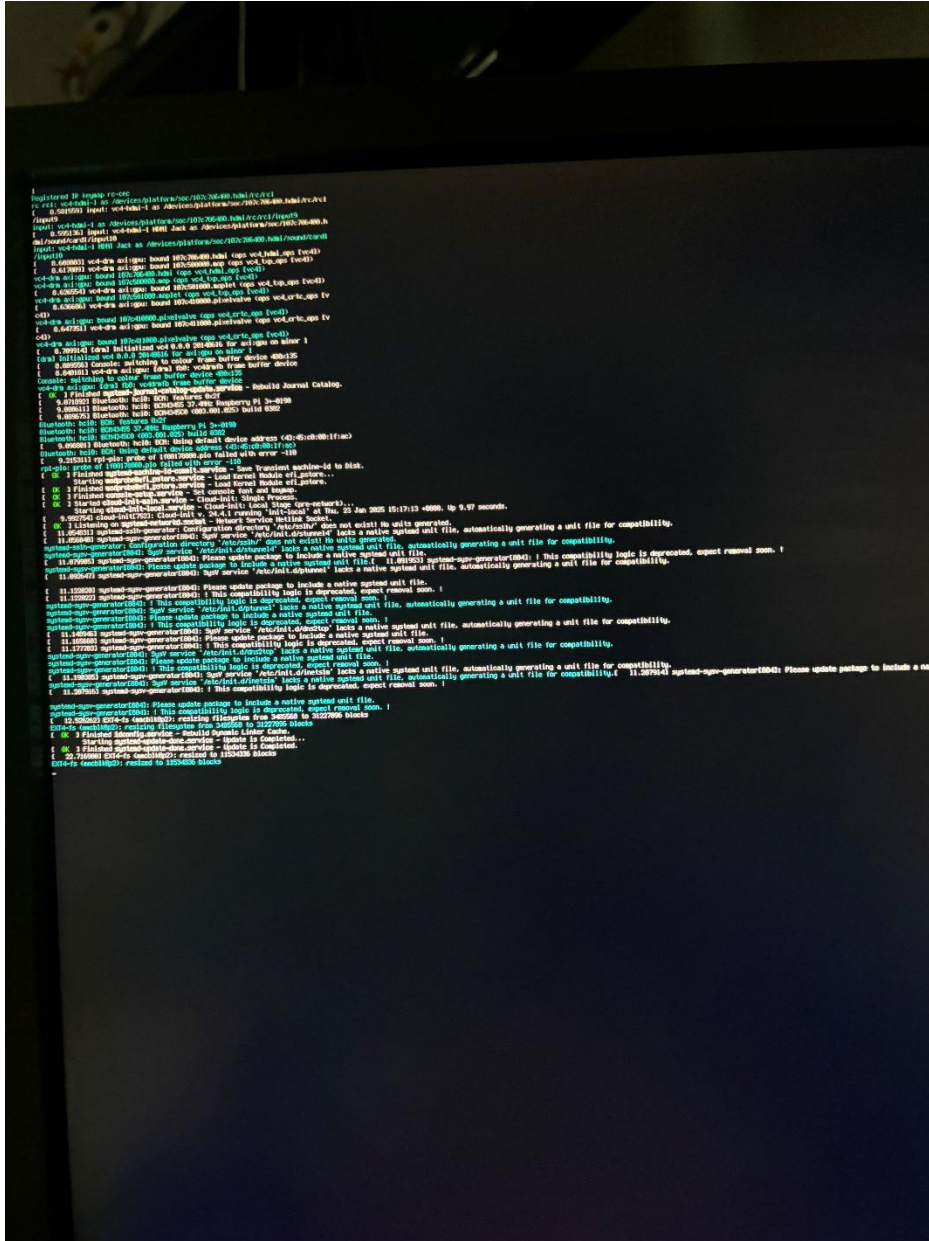

This is a pretty good sign the installation was successful.

This should boot straight into Kali because we already set up our user account and time zone settings in the imager.

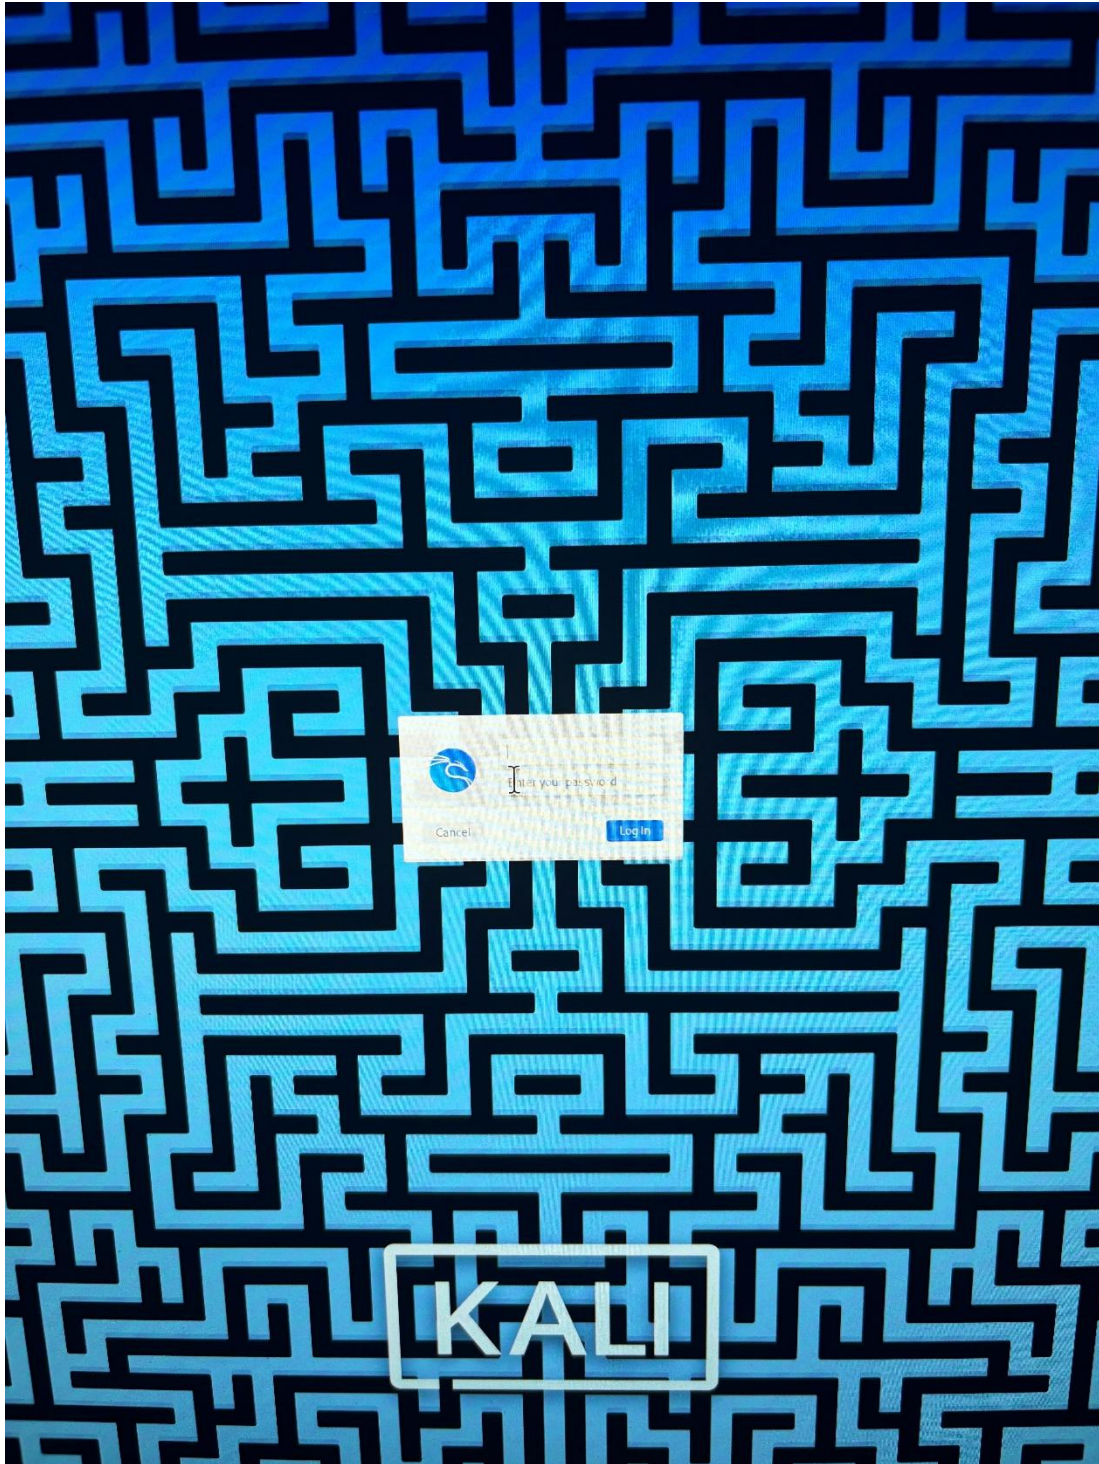


Now Kali is booted! Make sure when you first log in to run


“sudo apt-get upgrade”

Just to make sure everything in the repositories are updated.

Just to show a proof of concept and just to show everything is working correctly, I just connected to the Pi remotely using SSH and PuTTY really quickly.

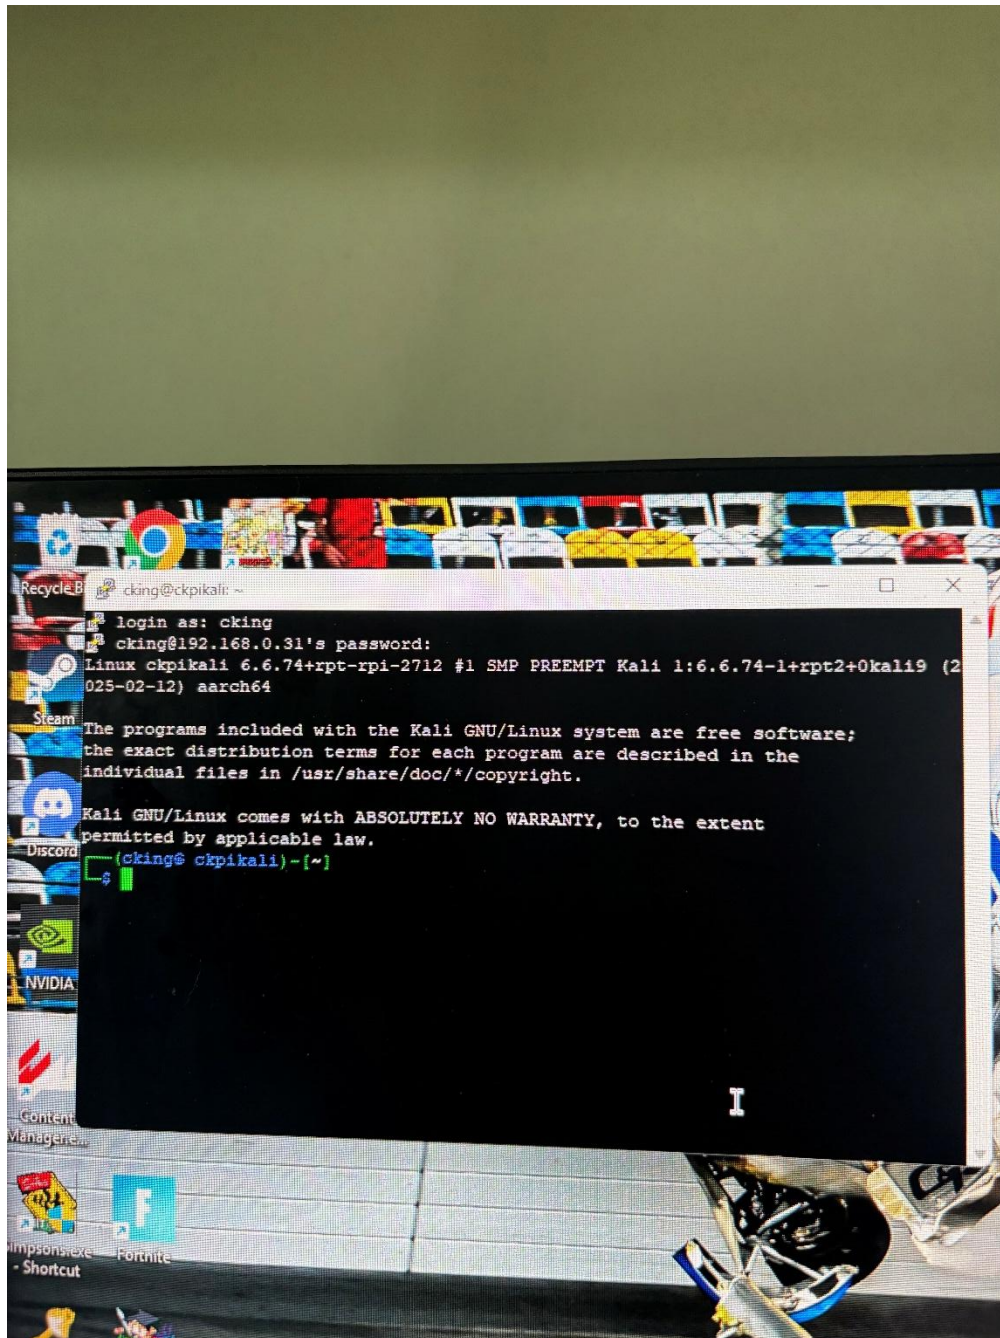

This shows I'm connected to the Pi on my PC.

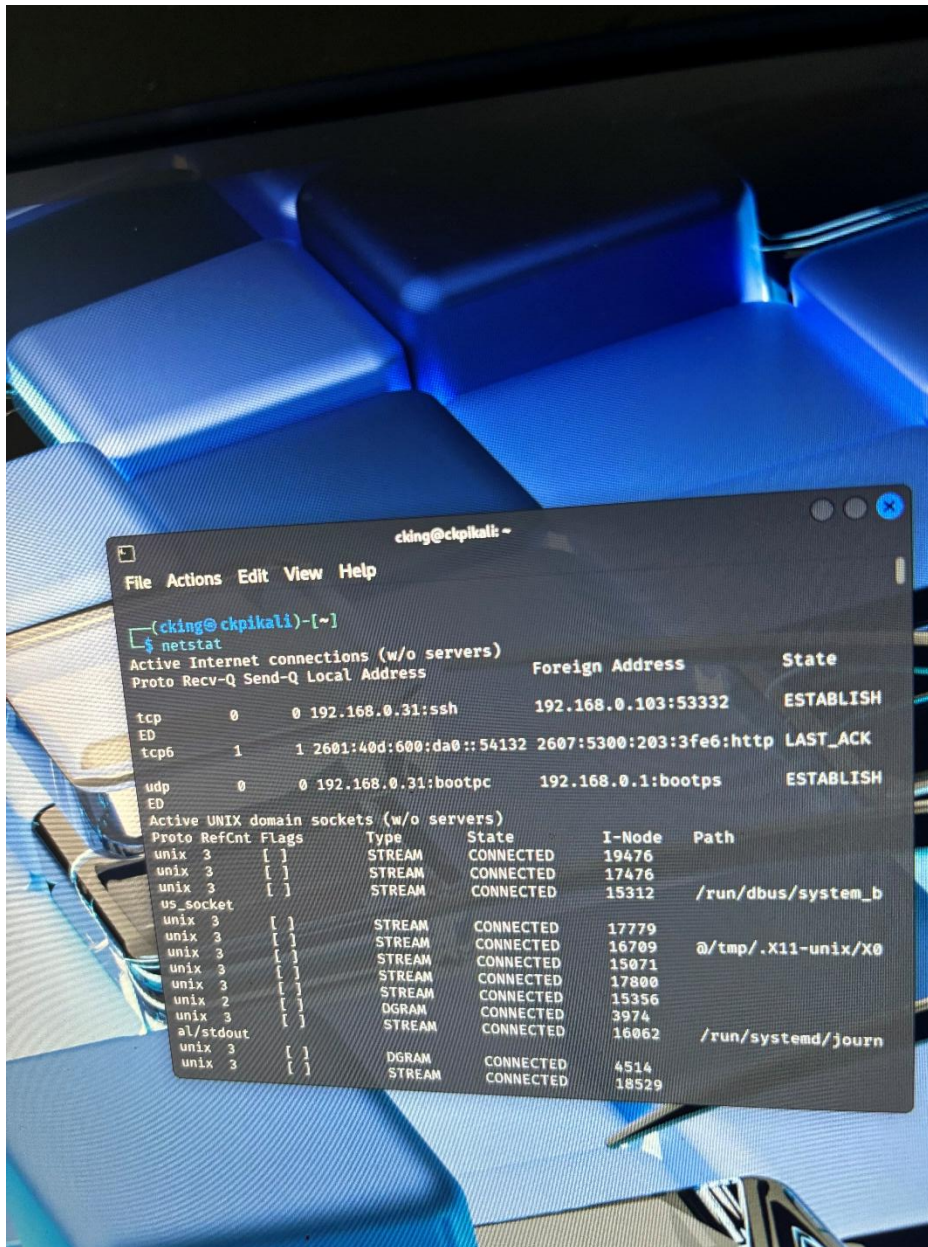

Then on the actual Pi, I ran “netstat”. The first line shows “192.168.0.31:ssh” which is my Pi’s IP address followed by ssh, then the IP address with an established connection is my PC’s IP address.