

# Accelerated intersection of geometric objects \*

Alberto Paoluzzi

February 11, 2015

## Abstract

This module contains the first experiments of a parallel implementation of the intersection of (multidimensional) geometric objects. The first installment is being oriented to the intersection of line segment in the 2D plane. A generalization of the algorithm, based on the classification of the containment boxes of the geometric values, will follow quickly.

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Implementation</b>	<b>2</b>
2.1	Construction of independent buckets . . . . .	2
2.2	Brute force intersection within the buckets . . . . .	4
2.3	Generation of LAR representation of split segments . . . . .	6
2.4	Biconnected components of a 1-complex . . . . .	7
2.5	2D cells from biconnected components . . . . .	9
<b>3</b>	<b>Exporting the module</b>	<b>14</b>
<b>4</b>	<b>Examples</b>	<b>15</b>
<b>A</b>	<b>Code utilities</b>	<b>24</b>

## 1 Introduction

An easily parallelizable implementation of the accelerated intersection of geometric objects is given in this module. Our first aim is to implement a specialized version for simplices, that

---

\*This document is part of the *Linear Algebraic Representation with CoChains* (LAR-CC) framework [CL13]. February 11, 2015

generalizes the  $nD$ -trees of points (that are 0-simplices), to  $(d-1)$ -dimensional simplices in  $d$ -space, starting with the intersection of line segments in the plane. Our plan is to follow with an implementation for intersection of general convex sets.

## 2 Implementation

The first implementation of this module concerns the computation of the intersection points among a set of line segment in the 2D plane. The containment boxes of the input segments are iteratively classified against the 1-dimensional centroid of smaller and smaller buckets of data.

At the end of the classification, where the same geometric object may be inserted in several different buckets, a *brute-force* intersection is applied to each final subset. Finally, the duplicated intersection points are removed, and a 1-dimensional LAR data structure is generated, with 1-cells given by the split line segments.

A complete LAR of the plane partition generated by the arrangement of lines is then computed by: (a) generating the maximal 2-connected components of such 1-dimensional graph; and (b) by traversing in counter-clockwise order the generated subgraphs to report the 2-dimensional cells of the plane partition.

The splitting algorithm may be easily parallelized, since both during their generation and at the end of this one, the various buckets of data can be dispatched to different processors for independent computation, followed by elimination of duplicates. In particular, a standard *map-reduce* software infrastructure may be used for this parallelization purpose.

### 2.1 Construction of independent buckets

**Containment boxes** Given as input a list `randomLineArray` of pairs of 2D points, the function `containmentBoxes` returns, in the same order, the list of *containment boxes* of the input lines. A *containment box* of a geometric object of dimension  $d$  is defined as the minimal  $d$ -cuboid, equioriented with the reference frame, that contains the object. For a 2D line it is given by the tuple  $(x1, y1, x2, y2)$ , where  $(x1, y1)$  is the point of minimal coordinates, and  $(x2, y2)$  is the point of maximal coordinates.

```

⟨ Containment boxes 2a ⟩ ≡
    """ Containment boxes """
    def containmentBoxes(randomLineArray):
        boxes = [eval(vcode([min(x1,x2),min(y1,y2),max(x1,x2),max(y1,y2)]))]
                for ((x1,y1),(x2,y2)) in randomLineArray]
        return boxes
    ◇

```

Macro referenced in [14](#).

## Splitting the input above and below a threshold

⟨Splitting the input above and below a threshold 2b⟩ ≡

```
""" Splitting the input above and below a threshold """
def splitOnThreshold(bboxes,subset,xy='x'):
    theBoxes = [bboxes[k] for k in subset]
    threshold = centroid(theBoxes,xy)
    if xy=='x': a=0;b=2;
    elif xy=='y': a=1;b=3;
    below,above = [],[]
    for k in subset:
        if bboxes[k][a] <= threshold: below += [k]
    for k in subset:
        if bboxes[k][b] >= threshold: above += [k]
    return below,above
```

◇

Macro referenced in 14.

## Iterative splitting of box buckets

⟨Iterative splitting of box buckets 3a⟩ ≡

```
""" Iterative splitting of box buckets """
def boxBuckets(bboxes):
    bucket = range(len(bboxes))
    splittingStack = [bucket]
    finalBuckets = []
    while splittingStack != []:
        bucket = splittingStack.pop()
        below,above = splitOnThreshold(bboxes,bucket,'x')
        below1,above1 = splitOnThreshold(bboxes,above,'y')
        below2,above2 = splitOnThreshold(bboxes,below,'y')

        if (len(below1)<4 and len(above1)<4) or len(set(bucket).difference(below1))<7 \
            or len(set(bucket).difference(above1))<7:
            finalBuckets.append(below1)
            finalBuckets.append(above1)
        else:
            splittingStack.append(below1)
            splittingStack.append(above1)

        if (len(below2)<4 and len(above2)<4) or len(set(bucket).difference(below2))<7 \
            or len(set(bucket).difference(above2))<7:
            finalBuckets.append(below2)
            finalBuckets.append(above2)
        else:
            splittingStack.append(below2)
```

```

        splittingStack.append(above2)
    return list(set(AA(tuple)(finalBuckets)))

```

◇

Macro referenced in 14.

## 2.2 Brute force intersection within the buckets

### Intersection of two line segments

⟨Intersection of two line segments 3b⟩ ≡

```

""" Intersection of two line segments """
def segmentIntersect(pointStorage):
    def segmentIntersect0(segment1):
        p1,p2 = segment1
        line1 = '['+ vcode(p1) +','+ vcode(p2) +']'
        (x1,y1),(x2,y2) = p1,p2
        #B1,B2,B3,B4 = eval(vcode([min(x1,x2),min(y1,y2),max(x1,x2),max(y1,y2)]))
    def segmentIntersect1(segment2):
        p3,p4 = segment2
        line2 = '['+ vcode(p3) +','+ vcode(p4) +']'
        (x3,y3),(x4,y4) = p3,p4
        #b1,b2,b3,b4 = eval(vcode([min(x3,x4),min(y3,y4),max(x3,x4),max(y3,y4)]))
        #if ((B1<=b1<=B3) or (B1<=b3<=B3)) and ((B2<=b2<=B4) or (B2<=b4<=B4)):
        if True:
            m23 = mat([p2,p3])
            m14 = mat([p1,p4])
            m = m23 - m14
            v3 = mat([p3])
            v1 = mat([p1])
            v = v3-v1
            a=m[0,0]; b=m[0,1]; c=m[1,0]; d=m[1,1];
            det = a*d-b*c
            if det != 0:
                m_inv = mat([[d,-b],[-c,a]])*(1./det)
                alpha, beta = (v*m_inv).tolist()[0]
                #alpha, beta = (v*m.I).tolist()[0]
                if 0<=alpha<=1 and 0<=beta<=1:
                    pointStorage[line1] += [alpha]
                    pointStorage[line2] += [beta]
                    return list(array(p1)+alpha*(array(p2)-array(p1)))
        return None
    return segmentIntersect1
    return segmentIntersect0

```

◇

Macro referenced in 14.

## Brute force bucket intersection

```
<Brute force bucket intersection 4> ≡  
    """ Brute force bucket intersection """  
    def lineBucketIntersect(lines,pointStorage):  
        intersect0 = segmentIntersect(pointStorage)  
        intersectionPoints = []  
        n = len(lines)  
        for k,line in enumerate(lines):  
            intersect1 = intersect0(line)  
            for h in range(k+1,n):  
                line1 = lines[h]  
                point = intersect1(line1)  
                if point != None:  
                    intersectionPoints.append(eval(vcode(point)))  
        return intersectionPoints  
    ◇
```

Macro referenced in 14.

## Accelerate intersection of lines

```
<Accelerate intersection of lines 5> ≡  
    """ Accelerate intersection of lines """  
    def lineIntersection(lineArray):  
  
        from collections import defaultdict  
        pointStorage = defaultdict(list)  
        for line in lineArray:  
            p1,p2 = line  
            key = '['+ vcode(p1) +',' + vcode(p2) +']'  
            pointStorage[key] = []  
  
        boxes = containmentBoxes(lineArray)  
        buckets = boxBuckets(boxes)  
        intersectionPoints = set()  
        for bucket in buckets:  
            lines = [lineArray[k] for k in bucket]  
            pointBucket = lineBucketIntersect(lines,pointStorage)  
            intersectionPoints = intersectionPoints.union(AA(tuple)(pointBucket))  
  
        frags = AA(eval)(pointStorage.keys())  
        params = AA(COMP([sorted,list,set,tuple,eval,vcode]))(pointStorage.values())  
  
        return intersectionPoints,params,frags    ### GOOD: 1, WRONG: 2 !!!  
    ◇
```

Macro referenced in 14.

## 2.3 Generation of LAR representation of split segments

The function `lines2lar` is used to generate a 1-dimensional LAR complex from an array of lines, i.e. of pairs of 2D points. For every *line* in `frags` is computed an *ordered* list `outline` of *symbolic* intersection points, including the first and last vertex of the line, and every interior point generated by the list `params[k]`.

Then, for every symbolic representation `key` of a point in `outline`, a dictionary vertex is either created or retrieved, and a corresponding edge is orderly created, using the index of the point. At the same time, the vertices created in this way are accumulated within the `V` array. Finally, each edge in `EV` is extended to contain a second vertex index using the subsequent edge.

The third stage finalizes the vertex set of the output LAR, by identifying the closest vertices, i.e. those at distance less or equal to the current resolution, set to `10*(-PRECISION)`, by searching via the `scipy.spatialKdTree` the pairs of vertices at less than this distance.

A fourth stage identifies the possibly duplicated edges. Some of these could appear, e.g., when importing a set of adjacent boxes from some drawing program, to generate an array of lines, to be mutually intersected and transformed into a LAR data structure.

### Create the LAR of fragmented lines

```
< Create the LAR of fragmented lines 6 > ≡
    """ Create the LAR of fragmented lines """
    from scipy import spatial

    def lines2lar(lineArray):
        _,params,frags = lineIntersection(lineArray)
        vertDict = dict()
        index,defaultValue,V,EV = -1,-1,[],[]

        for k,(p1,p2) in enumerate(frags):
            outline = [vcode(p1)]
            if params[k] != []:
                for alpha in params[k]:
                    if alpha != 0.0 and alpha != 1.0:
                        p = list(array(p1)+alpha*(array(p2)-array(p1)))
                        outline += [vcode(p)]
            outline += [vcode(p2)]

        edge = []
        for key in outline:
            if vertDict.get(key,defaultValue) == defaultValue:
                index += 1
                vertDict[key] = index
                edge += [index]
```

```

        V += [eval(key)]
    else:
        edge += [vertDict[key]]
    EV.extend([[edge[k],edge[k+1]] for k,v in enumerate(edge[:-1])])

# identification of close vertices
closePairs = scipy.spatial.KDTree(V).query_pairs(10**(-PRECISION))
if closePairs != []:
    EV_ = []
    for v1,v2 in EV:
        for v,w in closePairs:
            if v1 == w: v1 = v
            elif v2 == w: v2 = v
        EV_ += [[v1,v2]]
    EV = EV_
    print "\nclosePairs =",closePairs

# Remove double edges
EV = list(set(AA(tuple)(AA(sorted)(EV))))

return V,EV

```

◇

Macro referenced in 14.

## 2.4 Biconnected components of a 1-complex

An implementation of the Hopcroft-Tarjan algorithm [HT73] for computation of the biconnected components of a graph is given here.

### Biconnected components

```

⟨ Biconnected components 7a ⟩ ≡
    """ Biconnected components """
    ⟨ Adjacency lists of 1-complex vertices 7b ⟩
    ⟨ Main procedure for biconnected components 7c ⟩
    ⟨ Hopcroft-Tarjan algorithm 8 ⟩
    ⟨ Output of biconnected components 9a ⟩

```

◇

Macro referenced in 14.

### Adjacency lists of 1-complex vertices

```

⟨ Adjacency lists of 1-complex vertices 7b ⟩ ≡

```

```

""" Adjacency lists of 1-complex vertices """
def vertices2vertices(model):
    V,EV = model
    csrEV = csrCreate(EV)
    csrVE = csrTranspose(csrEV)
    csrVV = matrixProduct(csrVE,csrEV)
    cooVV = csrVV.tocoo()
    data,rows,cols = AA(list)([cooVV.data, cooVV.row, cooVV.col])
    triples = zip(data,rows,cols)
    VV = [[] for k in range(len(V))]
    for datum,row,col in triples:
        if row != col: VV[col] += [row]
    return AA(sorted)(VV)

```

◇

Macro referenced in 7a.

## Main procedure for biconnected components

⟨Main procedure for biconnected components 7c⟩ ≡

```

""" Main procedure for biconnected components """
def biconnectedComponent(model):
    W,_ = model
    V = range(len(W))
    count = 0
    stack,out = [],[]
    visited = [None for v in V]
    parent = [None for v in V]
    d = [None for v in V]
    low = [None for v in V]
    for u in V: visited[u] = False
    for u in V: parent[u] = []
    VV = vertices2vertices(model)
    for u in V:
        if not visited[u]:
            DFV_visit( VV,out,count,visited,parent,d,low,stack, u )
    return W,[component for component in out if len(component) > 1]

```

◇

Macro referenced in 7a.

## Hopcroft-Tarjan algorithm

⟨Hopcroft-Tarjan algorithm 8⟩ ≡

```

""" Hopcroft-Tarjan algorithm """
def DFV_visit( VV,out,count,visited,parent,d,low,stack,u ):
    visited[u] = True

```



```

count += 1
d[u] = count
low[u] = d[u]
for v in VV[u]:
    if not visited[v]:
        stack += [(u,v)]
        parent[v] = u
        DFV_visit( VV,out,count,visited,parent,d,low,stack, v )
        if low[v] >= d[u]:
            out += [outputComp(stack,u,v)]
            low[u] = min( low[u], low[v] )
        else:
            if not (parent[u]==v) and (d[v] < d[u]):
                stack += [(u,v)]
                low[u] = min( low[u], d[v] )

```

◇

Macro referenced in 7a.

## Output of biconnected components

```

⟨ Output of biconnected components 9a ⟩ ≡
    """ Output of biconnected components """
    def outputComp(stack,u,v):
        out = []
        while True:
            e = stack.pop()
            out += [list(e)]
            if e == (u,v): break
        return list(set(AA(tuple)(AA(sorted)(out))))

```

◇

Macro referenced in 7a.

## 2.5 2D cells from biconnected components

It is very easy, using the LAR representation of topology, to compute the 2-cells of the plane partitions (see Figures 1b and 1c) induced by the biconnected components extracted from a graph (1-complex).

In particular, let us consider the CSR (Compressed Sparse Row) representation of the characteristic matrix  $M_1$ , here usually denoted as **EV**, in order to remark that we represent the edges on the rows, and the vertices on the columns of the matrix. As such it is a binary matrix. So, we can readily reconstruct the topology of 2-cells by associating to each non-zero (sparse) matrix element **angle.EV**( $h,k$ ) the angle in radians that the edge  $e_h$  forms with the horizontal line, when it incides on the vertex  $v_k$ .



Figure 1: Two random line arrangements, and the biconnected components extracted by their LAR 1-complexes.

Of course, if  $e_h = (v_{k_1}, v_{k_2})$ , then it will be

$$\text{angle\_EV}(h, k_2) = \text{angle\_EV}(h, k_1) + \pi = -\text{angle\_EV}(h, k_1)$$

Therefore, the columns of **angle\_EV**, i.e. the rows of **angle\_VE** := **angle\_EV**<sup>t</sup>, after being sorted on their angles  $\alpha$ , and associated with the angle differences  $\Delta\alpha$ , will provide a basis of elementary 1 – *cochains* that evaluate to zero for each closed 1-cochain, i.e. for every cycle supported by the linear space of 1-chains on the given line arrangement.

## Slope of edges

### Circular ordering of edges around vertices

⟨ Slope of edges 9b ⟩ ≡

```
""" Circular ordering of edges around vertices """
def edgeSlopeOrdering(model):
    V,EV = model
    from bool1 import invertRelation
    VE,VE_angle = invertRelation(EV),[]
    for v,ve in enumerate(VE):
        ve_angle = []
        if ve != []:
            for edge in ve:
                v0,v1 = EV[edge]
                if v == v0:    x,y = list(array(V[v1]) - array(V[v0]))
                elif v == v1:  x,y = list(array(V[v0]) - array(V[v1]))
                angle = math.atan2(y,x)
                ve_angle += [180*angle/PI]
            pairs = sorted(zip(ve_angle,ve))
            #VE_angle += [TRANS(pairs)[1]]
            VE_angle += [[pair[1] for pair in pairs]]
    return VE_angle
```

◇

Macro referenced in [14](#).

**Ordered incidence relationship vertices to edges** As we have seen, the **VE\_angle** list of lists reports, for every vertex in **V**, the list of incident edges, *counterclockwise ordered* around the vertex. Therefore the **ordered\_csrVE** function, given below, returns the “compressed sparse row” matrix, row-indexed by vertices and column-indexed by edges, and such that in position  $(v, e)$  contains the index  $\ell$  of the next edge (after  $e$ , say) in the counterclockwise ordering of edges around  $v$ .

⟨ Ordered incidence relationship of vertices and edges 11a ⟩ ≡

```

""" Ordered incidence relationship of vertices and edges """
def ordered_csrVE(VE_angle):
    triples = []
    for v,ve in enumerate(VE_angle):
        n = len(ve)
        for k,edge in enumerate(ve):
            triples += [[v, ve[k], ve[ (k+1)%n ]]]
    csrVE = triples2mat(triples,shape="csr")
    return csrVE

```

Macro referenced in 14.

**Faces from biconnected components** Since edges in the plane partition induced by a line arrangement are  $(d-1)$ -cells, they are located on the boundary of *two*  $d$ -cells (faces) of the partition. Hence, the traversal algorithm of the data structure storing the relevant information may be driven by signing the two extremes (vertices) of each edge as either already visited or not.

```

⟨Faces from biconnected components 11b⟩ ≡
""" Faces from biconnected components """

def firstSearch(visited):
    for edge,vertices in enumerate(visited):
        for v,vertex in enumerate(vertices):
            if visited[edge,v] == 0.0:
                visited[edge,v] = 1.0
                return edge,v
    return -1,-1

def facesFromComponents(model):
    V,EV = model
    FV = []
    VE_angle = edgeSlopeOrdering(model)
    csrEV = ordered_csrVE(VE_angle).T
    visited = zeros((len(EV),2))
    edge,v = firstSearch(visited)
    vertex = EV[edge][v]
    fv = []
    while True:
        if (edge,v) == (-1,-1):
            return [face for face in FV if face != None]
        elif (fv == []) or (fv[0] != vertex):

            fv += [vertex]
            nextEdge = csrEV[edge,vertex]

```

```

v0,v1 = EV[nextEdge]

try:
    vertex, = set([v0,v1]).difference([vertex])
except ValueError:
    print 'ValueError: too many values to unpack'
    break

if v0==vertex: pos=0
elif v1==vertex: pos=1

if visited[nextEdge, pos] == 0:
    visited[nextEdge, pos] = 1
    edge = nextEdge
else:
    FV += [fv]
    fv = []
    edge,v = firstSearch(visited)
    vertex = EV[edge][v]
    #print "fv =",fv
    #print "edge,vertex =",edge,vertex
return [face for face in FV if face != None]

```

◇

Macro referenced in 14.

**Txample** The *ordered csrVE* (vertex-edge) matrix generated by the example of file `test/py/inters/test07.py` is shown in dense format in the example script below. Let us notice the each non-zero element  $\text{csrVE}(k, h)$  stores the index of the previous edge inciding on the vertex  $v_k$  *before* the edge  $e_h$ . The traversal of the data structure is made accordingly, in order to extract the vertices of all the faces (minimal edge cycles) generated by a line arrangement in the plane.

⟨ Example of VE matrix with nextEdge indices 13a ⟩  $\equiv$

```

csr2DenseMatrix(csrVE)
>>> array([
    [12,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0, 11,  0,  0,  0],
    [ 1,  2,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0],
    [ 0, 14,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  1,  0],
    [ 0,  0,  6,  5,  0,  2,  3,  0,  0,  0,  0,  0,  0,  0,  0,  0],
    [ 0,  0,  0, 10,  0,  0,  0,  0,  0,  0,  3,  9,  0,  0,  0,  0],
    [ 0,  0,  0,  0, 15,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  4],
    [ 0,  0,  0,  0, 12,  4,  0,  0,  0,  0,  0,  0,  5,  0,  0,  0],
    [ 0,  0,  0,  0,  0,  0,  7,  8,  6,  0,  0,  0,  0,  0,  0,  0],
    [ 0,  0,  0,  0,  0,  0,  0,  7,  0,  0,  0,  0,  0,  0,  0,  0],

```

```
[ 0, 0, 0, 0, 0, 0, 0, 0, 0, 10, 0, 8, 0, 0, 0, 0, 0],
[ 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 9, 0, 0, 0, 0, 0, 0],
[ 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 13, 0, 14, 11, 0],
[ 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 15, 0, 13]]
```

◇

Macro never referenced.

**Transformation of an array of lines in a 2D LAR complex** The whole transformation of an array of lines into a two-dimensional LAR complex is executed by the function `larFromLines`. The function returns the model triple `V,FV,EV`. The last element in `FV` is the *ordered* boundary chain.

⟨ Transformation of an array of lines in a 2D LAR complex 13b ⟩ ≡

```
""" Transformation of an array of lines in a 2D LAR complex """
from bool1 import larRemoveVertices
from hospital import surfIntegration

def larFromLines(lines):
    V,EV = lines2lar(lines)
    V,EVs = biconnectedComponent((V,EV))
    EV = list(set(AA(tuple)(sorted(AA(sorted)(CAT(EVs))))))
    V,EV = larRemoveVertices(V,EV)
    FV = facesFromComponents((V,EV))
    areas = surfIntegration((V,FV,EV))
    boundaryArea = max(areas)
    interiorFaces = [FV[f] for f,area in enumerate(areas) if area!=boundaryArea]
    boundaryFace = FV[areas.index(boundaryArea)]
    return V,interiorFaces+[boundaryFace],EV
```

◇

Macro referenced in 14.

### 3 Exporting the module

```
"lib/py/inters.py" 14 ≡
""" Module for pipelined intersection of geometric objects """
from pyplasm import *
""" import modules from larcc/lib """
import sys
sys.path.insert(0, 'lib/py/')
from larcc import *
DEBUG = True

⟨ Coding utilities 23 ⟩
```

- < Generation of random lines 24a >
- < Containment boxes 2a >
- < Splitting the input above and below a threshold 2b >
- < Box metadata computation ? >
- < Iterative splitting of box buckets 3a >
- < Intersection of two line segments 3b >
- < Brute force bucket intersection 4 >
- < Accelerate intersection of lines 5 >
- < Create the LAR of fragmented lines 6 >
- < Biconnected components 7a >
- < Slope of edges 9b >
- < Ordered incidence relationship of vertices and edges 11a >
- < Faces from biconnected components 11b >
- < SVG input parsing and transformation 21 >
- < Transformation of an array of lines in a 2D LAR complex 13b >

◇

## 4 Examples

### Generation of random line segments and their boxes

```
"test/py/inters/test01.py" 15a ≡
    """ Generation of random line segments and their boxes """
    import sys
    sys.path.insert(0, 'lib/py/')
    from inters import *

    randomLineArray = randomLines(200,0.3)
    VIEW(STRUCT(AA(POLYLINE)(randomLineArray)))

    boxes = containmentBoxes(randomLineArray)
    rects= AA(box2rect)(boxes)
    cyan = COLOR(CYAN)(STRUCT(AA(POLYLINE)(randomLineArray)))
    yellow = COLOR(YELLOW)(STRUCT(AA(POLYLINE)(rects)))
    VIEW(STRUCT([cyan,yellow]))
    ◇
```

### Split segment array in four independent buckets

```
"test/py/inters/test02.py" 15b ≡
    """ Split segment array in four independent buckets """
    import sys
    sys.path.insert(0, 'lib/py/')
    from inters import *

    randomLineArray = randomLines(200,0.3)
```

```

VIEW(STRUCT(AA(POLYLINE)(randomLineArray)))
boxes = containmentBoxes(randomLineArray)
bucket = range(len(boxes))
below,above = splitOnThreshold(boxes,bucket,'x')
below1,above1 = splitOnThreshold(boxes,above,'y')
below2,above2 = splitOnThreshold(boxes,below,'y')

cyan = COLOR(CYAN)(STRUCT(AA(POLYLINE)(randomLineArray[k] for k in below1)))
yellow = COLOR(YELLOW)(STRUCT(AA(POLYLINE)(randomLineArray[k] for k in above1)))
red = COLOR(RED)(STRUCT(AA(POLYLINE)(randomLineArray[k] for k in below2)))
green = COLOR(GREEN)(STRUCT(AA(POLYLINE)(randomLineArray[k] for k in above2)))

VIEW(STRUCT([cyan,yellow,red,green]))
◇

```

### Generation and random coloring of independent line buckets

```

"test/py/inters/test03.py" 15c ≡
    """ Generation and random coloring of independent line buckets """
    import sys
    sys.path.insert(0, 'lib/py/')
    from inters import *

    lines = randomLines(200,0.3)
    VIEW(STRUCT(AA(POLYLINE)(lines)))

    boxes = containmentBoxes(lines)
    buckets = boxBuckets(boxes)

    colors = [CYAN, MAGENTA, WHITE, RED, YELLOW, GRAY, GREEN, ORANGE, BLACK, BLUE, PURPLE, BROWN]
    sets = [COLOR(colors[k%12])(STRUCT(AA(POLYLINE)([lines[h]
        for h in bucket]))) for k,bucket in enumerate(buckets)]

    VIEW(STRUCT(sets))
    ◇

```

### Construction of LAR = (V,EV) of random line arrangement

```

"test/py/inters/test04.py" 16a ≡
    """ LAR of random line arrangement """
    import sys
    sys.path.insert(0, 'lib/py/')
    from inters import *

    lines = randomLines(400,0.2)
    VIEW(STRUCT(AA(POLYLINE)(lines)))

```



```

intersectionPoints,params,frags = lineIntersection(lines)

marker = CIRCLE(.005)([4,1])
markers = STRUCT(CONS(AA(T([1,2]))(intersectionPoints))(marker))
VIEW(STRUCT(AA(POLYLINE)(lines)+[COLOR(RED)(markers)]))

V,EV = lines2lar(lines)
marker = CIRCLE(.01)([4,1])
markers = STRUCT(CONS(AA(T([1,2]))(V))(marker))
#markers = STRUCT(CONS(AA(T([1,2]))(intersectionPoints))(marker))
polylines = STRUCT(MKPOLS((V,EV)))
VIEW(STRUCT([polylines]+[COLOR(MAGENTA)(markers)]))
◇

```

### Splitting of othogonal lines

```

"test/py/inters/test05.py" 16b ≡
    """ LAR from splitting of othogonal lines """
    import sys
    sys.path.insert(0, 'lib/py/')
    from inters import *
    ⟨Orthogonal example 17a⟩
◇

```

⟨Orthogonal example 17a⟩ ≡

```

lines = [[0,0],[6,0]], [[0,4],[10,4]], [[0,0],[0,4]], [[3,0],[3,4]],
[[6,0],[6, 8]], [[3,2],[6,2]], [[10,0],[10,8]], [[0,8],[10,8]]

VIEW(EXPLODE(1.2,1.2,1)(AA(POLYLINE)(lines)))

V,EV = lines2lar(lines)
VIEW(EXPLODE(1.2,1.2,1)(MKPOLS((V,EV))))
◇

```

Macro referenced in 16b, 19ab.

### Random coloring of the generated 1-complex LAR

```

"test/py/inters/test06.py" 17b ≡
    """ Random coloring of the generated 1-complex """
    import sys
    sys.path.insert(0, 'lib/py/')
    from inters import *

```

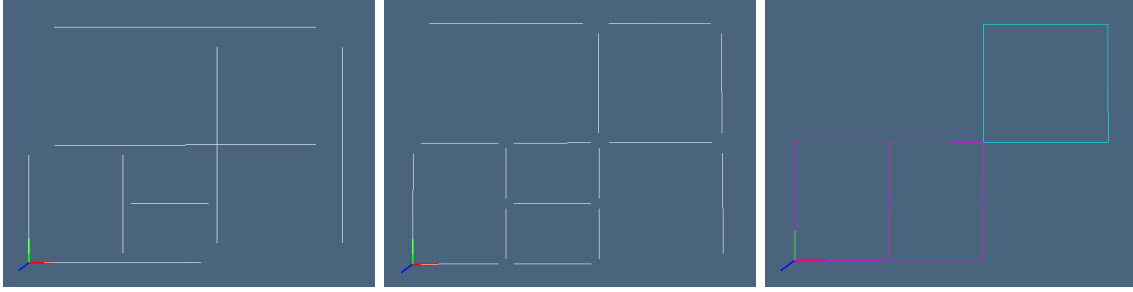


Figure 2: Splitting of orthogonal lines: (a) exploded input; (a) exploded output; (c) biconnected components.

```

lines = randomLines(400,0.2)
VIEW(STRUCT(AA(POLYLINE)(lines)))

V,EV = lines2lar(lines)
colors = [CYAN, MAGENTA, WHITE, RED, YELLOW, GRAY, GREEN, ORANGE, BLACK, BLUE, PURPLE, BROWN]
sets = [COLOR(colors[k%12])(POLYLINE([V[e[0]],V[e[1]]])) for k,e in enumerate(EV)]

VIEW(STRUCT(sets))
◇

```

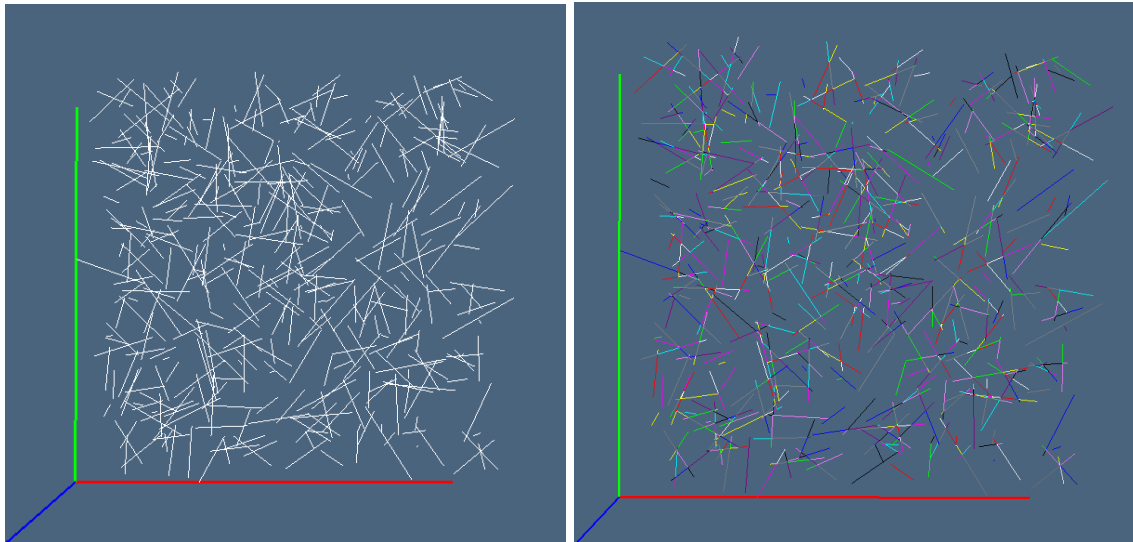


Figure 3: Splitting of intersecting lines: (a) random input; (a) splitted and colored LAR output.

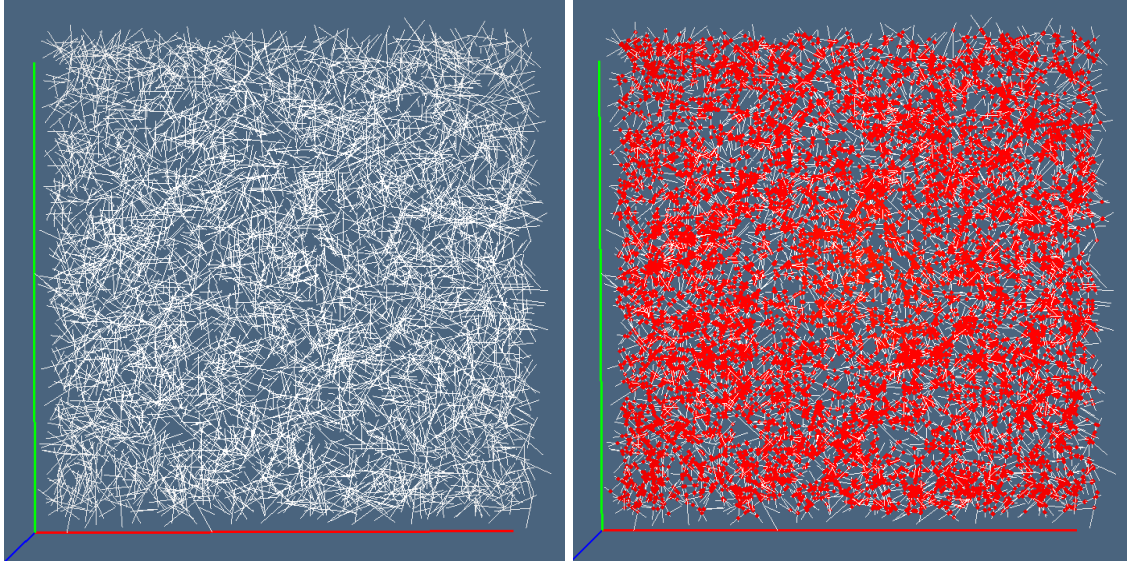


Figure 4: The intersection of 5000 random lines in the unit interval, with `scaling` parameter equal to 0.1

### Biconnected components from orthogonal LAR model

```
"test/py/inters/test07.py" 19a ≡
    """ Biconnected components from orthogonal LAR model """
    import sys
    sys.path.insert(0, 'lib/py/')
    from inters import *
    from bool1 import larRemoveVertices
    colors = [CYAN, MAGENTA, WHITE, RED, YELLOW, GREEN, ORANGE, BLACK, BLUE, PURPLE]

    ⟨Orthogonal example 17a⟩
    model = V,EV
    V,EVs = biconnectedComponent(model)
    HPCs = [STRUCT(MKPOLS((V,EV))) for EV in EVs]

    sets = [COLOR(colors[k%10])(hpc) for k,hpc in enumerate(HPCs)]
    VIEW(STRUCT(sets))
    VIEW(STRUCT(MKPOLS((V,CAT(EVs)))))

    #V,EV = larRemoveVertices(V,CAT(EVs))
    ◇
```

### 2-complex from orthogonal line segments

```
"test/py/inters/test08.py" 19b ≡
```

```

""" 2-complex from orthogonal line segments """
import sys
sys.path.insert(0, 'lib/py/')
from inters import *
colors = [CYAN, MAGENTA, WHITE, RED, YELLOW, GREEN, ORANGE, BLACK, BLUE, PURPLE]

<Orthogonal example 17a>
model = V,EV
V,EVs = biconnectedComponent(model)
HPCs = [STRUCT(MKPOLS((V,EV))) for EV in EVs]

sets = [COLOR(colors[k%10])(hpc) for k,hpc in enumerate(HPCs)]
VIEW(STRUCT(sets))

EV = sorted(CAT(EVs))
VIEW(STRUCT(MKPOLS((V,EV))))

FV = facesFromComponents((V,EV))

from hospital import surfIntegration
areas = surfIntegration((V,FV,EV))
boundaryArea = max(areas)
FV = [FV[f] for f,area in enumerate(areas) if area!=boundaryArea]
VIEW(EXPLODE(1.2,1.2,1)(MKPOLS((V,FV+EV)) + AA(MK)(V)))
◇

```

## Biconnected components from random LAR model

```

"test/py/inters/test09.py" 20 ≡
""" Biconnected components from orthogonal LAR model """
import sys
sys.path.insert(0, 'lib/py/')
from inters import *
from bool1 import larRemoveVertices
from hospital import surfIntegration
from iot3d import polyline2lar
colors = [CYAN, MAGENTA, YELLOW, RED, GREEN, ORANGE, PURPLE, WHITE, BLACK, BLUE]

lines = randomLines(800,0.2)
V,EV = lines2lar(lines)
model = V,EV

V,EVs = biconnectedComponent(model)
HPCs = [STRUCT(MKPOLS((V,EV))) for EV in EVs]
sets = [COLOR(colors[k%10])(hpc) for k,hpc in enumerate(HPCs)]
VIEW(STRUCT(sets))

```

```

EV = CAT(EVs)
V,EV = larRemoveVertices(V,EV)
FV = facesFromComponents((V,EV))
from hospital import surfIntegration
areas = surfIntegration((V,FV,EV))
boundaryArea = max(areas)
FV = [FV[f] for f,area in enumerate(areas) if area!=boundaryArea]
VIEW(EXPLODE(1.2,1.2,1)(MKPOLLS((V,FV+EV)) + AA(MK)(V)))

from bool1 import larRemoveVertices
V,EV = larRemoveVertices(V,EV)
VV = AA(LIST)(range(len(V)))
submodel = STRUCT(MKPOLLS((V,EV)))
VIEW(larModelNumbering(1,1,1)(V,[VV,EV],submodel,0.015))
◇

```

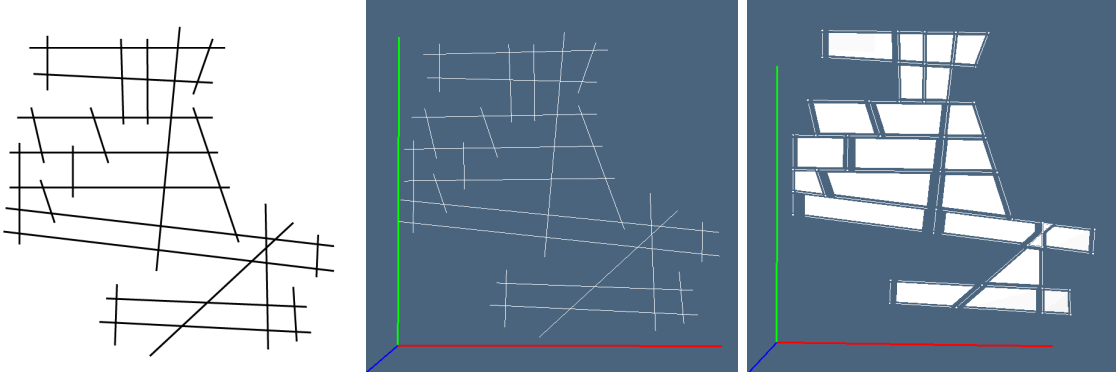


Figure 5: LAR complex generation from SVG file. (a) the input set of lines; (b) imported in pyplasm environment; (c) the extracted *regularized* 2-complex, drawn exploded.

**SVG input parsing and transformation** We postulate here that the input file `test/py/inters/test.svg` should contain only `<line>` primitives, so we skip any other content. Such primitives are parsed by matching against regular expressions, and their `x1,y1,x2,y2` attributes are extracted and stored into the `lines` variable. An isomorphic window-viewport transformation is then performed, to transform the data within the standard unit 2D square  $[0,1]^2$ . The input vertices are finally set to a fixed resolution, using the `vcode` function.

```

⟨SVG input parsing and transformation 21⟩ ≡
""" SVG input parsing and transformation """
from larcc import *
import re # regular expression

```

```

def svg2lines(filename):

    lines = [line.strip() for line in open(filename) if re.match("<line ",line)!=None]
    for line in lines: print line

    out = ""
    for line in lines:
        #searchObj = re.search( r'([0-9]*\.[0-9]*)(.*?)([0-9]*\.[0-9]*)(.*?)([0-9]*\.[0-9]*)(.*)'
        searchObj = re.search( r'(<line )(.+)( " x1=")(.+)(" y1=")(.+)(" x2=")(.+)(" y2=")(.+)('
        if searchObj:
            #out += "["+searchObj.group(1)+","+searchObj.group(3)+"], ["+searchObj.group(5)+",
            out += "["+searchObj.group(4)+","+searchObj.group(6)+"], ["+searchObj.group(8)+",

    lines = list(eval(out))

    # window-viewport transformation
    xs,ys = TRANS(CAT(lines))
    box = [min(xs), min(ys), max(xs), max(ys)]

    # viewport aspect-ratio checking, setting a computed-viewport 'b'
    b = [None for k in range(4)]
    if (box[2]-box[0])/(box[3]-box[1]) > 1:
        b[0]=0; b[2]=1; bm=(box[3]-box[1])/(box[2]-box[0]); b[1]=.5-bm/2; b[3]=.5+bm/2
    else:
        b[1]=0; b[3]=1; bm=(box[2]-box[0])/(box[3]-box[1]); b[0]=.5-bm/2; b[2]=.5+bm/2

    # isomorphic 'box -> b' transform to standard unit square
    lines = [[
        ((x1-box[0])*(b[2]-b[0]))/(box[2]-box[0]) ,
        ((y1-box[1])*(b[3]-b[1]))/(box[1]-box[3]) + 1], [
        ((x2-box[0])*(b[2]-b[0]))/(box[2]-box[0]),
        ((y2-box[1])*(b[3]-b[1]))/(box[1]-box[3]) + 1]]
        for [[x1,y1],[x2,y2]] in lines]

    # line vertices set to fixed resolution
    lines = eval("".join([''+ vcode(p1) +','+ vcode(p2) +'], ' for p1,p2 in lines]))
    return lines

```

◇

Macro referenced in 14.

**2-complex extraction from svg file** The input lines arrangements produces a 1-dimensional complex stored into the LAR model  $V, EV$ . Then the *dangling edges* are removed from  $EV$ , and the whole data set is renumbered, in order to remove the unused vertices, using the `larRemoveVertices` function. Finally the 2-cells are computed and stored in  $FV$ ,

and the positive areas of every 2cells are computed, so allowing for identify and removal of the exterior face, corresponding to the boundary of the complex. The polygonal boundary of the complex is finally drawn.

```
"test/py/inters/test10.py" 22 ≡
    """ Biconnected components from orthogonal LAR model """
    import sys
    sys.path.insert(0, 'lib/py/')
    from inters import *
    from iot3d import polyline2lar

    filename = "test/py/inters/test1.svg"
    lines = svg2lines(filename)
    VIEW(STRUCT(AA(POLYLINE)(lines)))

    V,FV,EV = larFromLines(lines)

    VV = AA(LIST)(range(len(V)))
    submodel = STRUCT(MKPOLS((V,EV)))
    VIEW(larModelNumbering(1,1,1)(V,[VV,EV,FV[:-1]],submodel,0.10))

    VIEW(EXPLODE(1.2,1.2,1)(MKPOLS((V,FV[:-1]+EV)) + AA(MK)(V)))

    verts,faces,edges = polyline2lar([[ V[v] for v in FV[-1] ]])
    VIEW(STRUCT(MKPOLS((verts,edges))))
    ◇
```

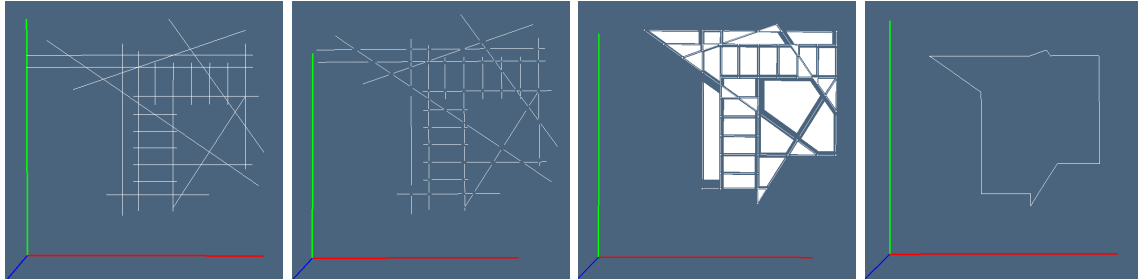


Figure 6: LAR complex generation from SVG file. (a) the input set of lines parsed from an SVG file; (b) the intersection of lines; (c) the extracted *regularized* 2-complex, drawn exploded; (d) the boundary LAR.

## A Code utilities

**Coding utilities** Some utility functions used by the module are collected in this appendix. Their macro names can be seen in the below script.

```
< Coding utilities 23 > ≡  
    """ Coding utilities """  
    < Generation of a random point 24b >  
    < Generation of a random line segment 24c >  
    < Transformation of a 2D box into a closed polyline 24d >  
    < Computation of the 1D centroid of a list of 2D boxes 25 >  
    ◇
```

Macro referenced in 14.

**Generation of random lines** The function `randomLines` returns the array `randomLineArray` with a given number of lines generated within the unit 2D interval. The `scaling` parameter is used to scale every such line, generated by two random points, that could be possibly located to far from each other, even at the distance of the diagonal of the unit square.

The arrays `xs` and `ys`, that contain the  $x$  and  $y$  coordinates of line points, are used to compute the minimal translation  $v$  needed to transport the entire set of data within the positive quadrant of the 2D plane.

```
< Generation of random lines 24a > ≡  
    """ Generation of random lines """  
    def randomLines(numberOfLines=200,scaling=0.3):  
        randomLineArray = [redge(scaling) for k in range(numberOfLines)]  
        [xs,ys] = TRANS(CAT(randomLineArray))  
        xmin, ymin = min(xs), min(ys)  
        v = array([-xmin,-ymin])  
        randomLineArray = [[list(v1+v), list(v2+v)] for v1,v2 in randomLineArray]  
        return randomLineArray  
    ◇
```

Macro referenced in 14.

**Generation of a random point** A single random point, codified in floating point format, and with a fixed (quite small) number of digits, is returned by the `rpoint()` function, with no input parameters.

```
< Generation of a random point 24b > ≡  
    """ Generation of a random point """  
    def rpoint():  
        return eval( vcode([ random.random(), random.random() ]) )  
    ◇
```

Macro referenced in 23.



**Generation of a random line segment** A single random segment, scaled about its centroid by the `scaling` parameter, is returned by the `redge()` function, as a tuple of two random points in the unit square.

```

⟨ Generation of a random line segment 24c ⟩ ≡
    """ Generation of a random line segment """
    def redge(scaling):
        v1,v2 = array(rpoint()), array(rpoint())
        c = (v1+v2)/2
        pos = rpoint()
        v1 = (v1-c)*scaling + pos
        v2 = (v2-c)*scaling + pos
        return tuple(eval(vcode(v1))), tuple(eval(vcode(v2)))
    ◇

```

Macro referenced in 23.

**Transformation of a 2D box into a closed polyline** The transformation of a 2D box into a closed rectangular polyline, given as an ordered sequwncw of 2D points, is produced by the function `box2rect`

```

⟨ Transformation of a 2D box into a closed polyline 24d ⟩ ≡
    """ Transformation of a 2D box into a closed polyline """
    def box2rect(box):
        x1,y1,x2,y2 = box
        verts = [[x1,y1],[x2,y1],[x2,y2],[x1,y2],[x1,y1]]
        return verts
    ◇

```

Macro referenced in 23.

**Computation of the 1D centroid of a list of 2D boxes** The 1D centroid of a list of 2D boxes is computed by the function given below. The direction of computation (either  $x$  or  $y$ ) is chosen depending on the value of the `xy` parameter.

```

⟨ Computation of the 1D centroid of a list of 2D boxes 25 ⟩ ≡
    """ Computation of the 1D centroid of a list of 2D boxes """
    def centroid(boxes,xy='x'):
        delta,n = 0,len(boxes)
        if xy=='x': a=0; b=2
        elif xy=='y': a=1; b=3
        for box in boxes:
            delta += (box[a] + box[b])/2
        return delta/n
    ◇

```

Macro referenced in 23.

## References

- [CL13] CVD-Lab, *Linear algebraic representation*, Tech. Report 13-00, Roma Tre University, October 2013.
- [HT73] John Hopcroft and Robert Tarjan, *Algorithm 447: Efficient algorithms for graph manipulation*, Commun. ACM **16** (1973), no. 6, 372–378.