



Signup and get free access to 100+ Tutorials and Practice Problems

[Start Now](#)7
LIVE EVENTS[All Tracks](#) > [Algorithms](#) > [Sorting](#) > Selection Sort

Algorithms

! Solve any problem to achieve a rank

[View Leaderboard](#)

Topics: Selection Sort

Selection Sort

[TUTORIAL](#) [PROBLEMS](#) [VISUALIZER](#) BETA

The Selection sort algorithm is based on the idea of finding the minimum or maximum element in an unsorted array and then putting it in its correct position in a sorted array.

Assume that the array $A = [7, 5, 4, 2]$ needs to be sorted in ascending order.

The minimum element in the array i.e. **2** is searched for and then swapped with the element that is currently located at the first position, i.e. **7**. Now the minimum element in the remaining unsorted array is searched for and put in the second position, and so on.

Let's take a look at the implementation.

```
void selection_sort (int A[ ], int n) {  
    // temporary variable to store the position of minimum element
```

?

```
int minimum;
// reduces the effective size of the array by one in each iteration.


for(int i = 0; i < n-1 ; i++) {

    // assuming the first element to be the minimum of the unsorted array .
    minimum = i ;

    // gives the effective size of the unsorted array .

    for(int j = i+1; j < n ; j++ ) {
        if(A[ j ] < A[ minimum ]) {           //finds the minimum element
            minimum = j ;
        }
    }
    // putting minimum element on its proper position.
    swap ( A[ minimum ], A[ i ] ) ;
}
}
```

At i^{th} iteration, elements from position 0 to $i - 1$ will be sorted.

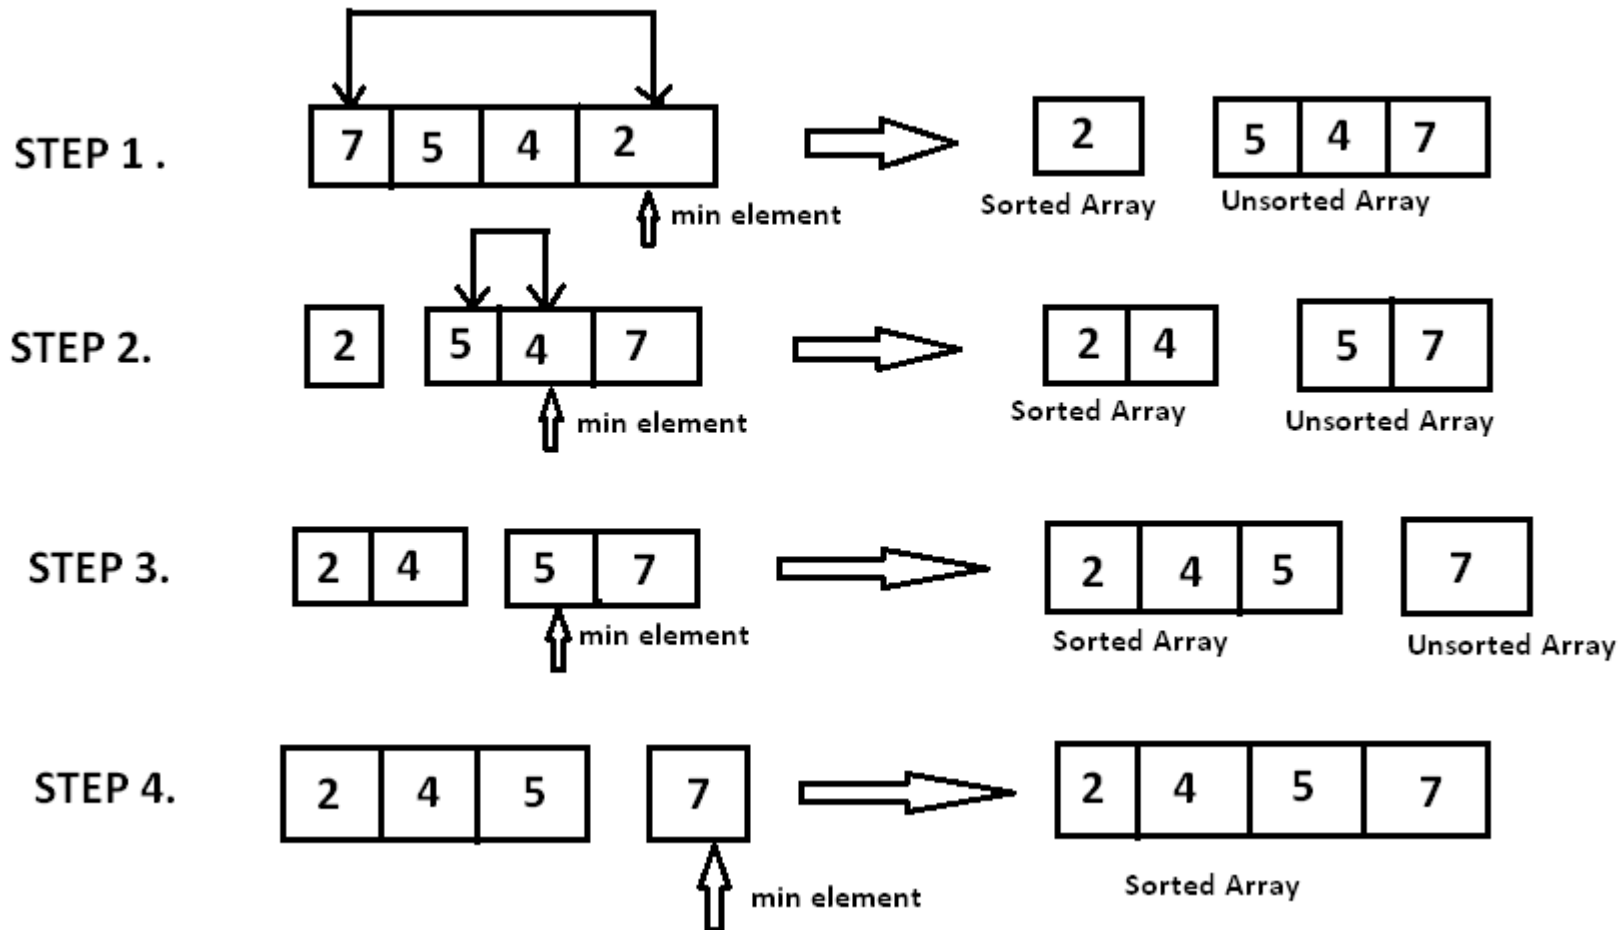

Time Complexity:

To find the minimum element from the array of N elements, $N - 1$ comparisons are required. After putting the minimum element in its proper position, the size of an unsorted array reduces to $N - 1$ and then $N - 2$ comparisons are required to find the minimum in the unsorted array.

Therefore $(N - 1) + (N - 2) + \dots + 1 = (N \cdot (N - 1))/2$ comparisons and N swaps result in the overall complexity of $O(N^2)$.

Contributed by: Anand Jaisingh

Did you find this tutorial helpful?



YES



NO

TEST YOUR UNDERSTANDING

Selection Sort

- Consider an Array a of size N
- Iterate from 1 to N
- In i^{th} iteration select the i^{th} minimum and swap it with $a[i]$

You are given an array a , size of the array N and an integer x . Follow the above algorithm and print the state of the array after x iterations have been performed.

Input Format

The first line contains two integer N and x denoting the size of the array and the steps of the above algorithm to be performed respectively. The next line contains N space separated integers denoting the elements of the array.

Output Format

Print N space separated integers denoting the state of the array after x steps

Constraints

$$1 \leq N \leq 100$$

$$1 \leq a[i] \leq 100$$

$$1 \leq x \leq N$$

SAMPLE INPUT



```
5 2
1 2 3 4 5
```

SAMPLE OUTPUT

```
1 2 3 4 5
```



7

LIVE EVENTS

Enter your code or [Upload your code](#) as file.

Save

Language



```
1 Loading...
```

1:1

 Press **Ctrl/Command+Spacebar** for autocomplete suggestions (accuracy dependent on connection stability).

?

 [View all comments](#)

7
LIVE EVENTS

| | Resources | Solutions | Company | Service & Support |
|---|---------------------------|---------------------------|----------|-------------------|
| <div>+1-650-461-4192</div> <div>contact@hackerearth.com</div> <div><div></div><div><div><div>f</div><div>twitter</div><div>in</div><div>youtube</div></div></div></div> | Tech Recruitment Blog | Assess Developers | About Us | Technical Support |
| | Product Guides | Conduct Remote Interviews | Press | Contact Us |
| | Developer hiring guide | Assess University Talent | Careers | |
| | Engineering Blog | Organize Hackathons | | |
| | Developers Blog | | | |
| | Developers Wiki | | | |
| | Competitive Programming | | | |
| | Start a Programming Club | | | |
| | Practice Machine Learning | | | |