
ш3schools.com

THE WORLD'S LARGEST WEB DEVELOPER SITE

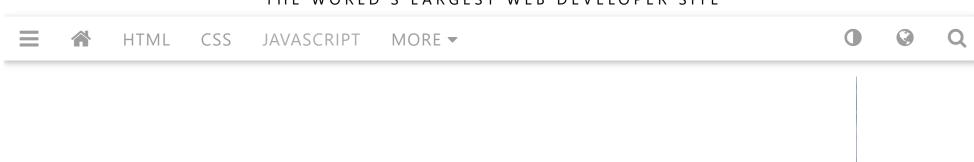

JavaScript While Loop

Previous

Next >

Loops can execute a block of code as long as a specified condition is true.

The While Loop

The while loop loops through a block of code as long as a specified condition is true.

Syntax

```
while (condition) {
  // code block to be executed
}
```

Example

In the following example, the code in the loop will run, over and over again, as long as a variable (i) is less than 10:

Example

```
while (i < 10) {
   text += "The number is " + i;
   i++;
}</pre>
```

Try it Yourself »

If you forget to increase the variable used in the condition, the loop will never end. This will crash your browser.

The Do/While Loop

The do/while loop is a variant of the while loop. This loop will execute the code block once, before checking if the condition is true, then it will repeat the loop as long as the condition is true.

Syntax

```
do {
// code block to be executed
```

```
}
while (condition);
```

Example

The example below uses a do/while loop. The loop will always be executed at least once, even if the condition is false, because the code block is executed before the condition is tested:

Example

```
do {
   text += "The number is " + i;
   i++;
}
while (i < 10);

Try it Yourself »</pre>
```

Do not forget to increase the variable used in the condition, otherwise the loop will never end!

Comparing For and While

If you have read the previous chapter, about the for loop, you will discover that a while loop is much the same as a for loop, with statement 1 and statement 3 omitted.

The loop in this example uses a for loop to collect the car names from the cars array:

Example

```
var cars = ["BMW", "Volvo", "Saab", "Ford"];
var i = 0;
var text = "";

for (;cars[i];) {
  text += cars[i] + "<br>";
  i++;
}
```

Try it Yourself »

The loop in this example uses a while loop to collect the car names from the cars array:

Example

```
var cars = ["BMW", "Volvo", "Saab", "Ford"];
var i = 0;
var text = "";

while (cars[i]) {
  text += cars[i] + "<br>";
```

```
i++;
}
Try it Yourself »
```

Test Yourself With Exercises

Exercise:

Create a loop that runs as long as i is less than 10.

Submit Answer »

Start the Exercise

< Previous</pre>

Next >

COLOR PICKER



HOW TO

Tabs Dropdowns Accordions Side Navigation Top Navigation **Modal Boxes Progress Bars** Parallax Login Form HTML Includes Google Maps Range Sliders **Tooltips** Slideshow Filter List Sort List

SHARE







CERTIFICATES

 HTML

CSS

JavaScript

SQL

Python

PHP

jQuery

Bootstrap

XML

Read More »

REPORT ERROR

PRINT PAGE

FORUM

ABOUT

Top Tutorials

Top References

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
jQuery Tutorial
Java Tutorial
C++ Tutorial

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
jQuery Examples
Java Examples
XML Examples

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
jQuery Reference
Java Reference
Angular Reference

Web Certificates

HTML Certificate
CSS Certificate
JavaScript Certificate
SQL Certificate
Python Certificate
jQuery Certificate
PHP Certificate
Bootstrap Certificate
XML Certificate

Get Certified »

W3Schools is optimized for learning, testing, and training. Examples might be simplified to improve reading and basic understanding. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using this site, you agree to have read and accepted our terms of use, cookie and privacy policy. Copyright 1999-2020 by Refsnes Data. All Rights Reserved.

Powered by W3.CSS.

