Wireless Workstation Connect

User Guide

4.0

MN-005398-03EN Rev. A

Zebra Technologies | 3 Overlook Point | Lincolnshire, IL 60069 USA
zebra.com

Copyright

2026/10/09

The Zebra wordmark and logo are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. ©2026 Zebra Technologies Corp. and/or its affiliates.

Information in this document is subject to change without notice. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of those agreements.

For further information regarding legal and proprietary statements, please go to:

SOFTWARE: zebra.com/informationpolicy.
COPYRIGHTS: zebra.com/copyright.
PATENTS: ip.zebra.com.
WARRANTY: zebra.com/warranty.
END USER LICENSE AGREEMENT: zebra.com/eula.

Terms of Use

Proprietary Statement

This manual contains proprietary information of Zebra Technologies Corporation and its subsidiaries ("Zebra Technologies"). It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the express, written permission of Zebra Technologies.

Product Improvements

Continuous improvement of products is a policy of Zebra Technologies. All specifications and designs are subject to change without notice.

Liability Disclaimer

Zebra Technologies takes steps to ensure that its published Engineering specifications and manuals are correct; however, errors do occur. Zebra Technologies reserves the right to correct any such errors and disclaims liability resulting therefrom.

Limitation of Liability

In no event shall Zebra Technologies or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, consequential damages including loss of business profits, business interruption, or loss of business information) arising out of the use of, the results of use of, or inability to use such product, even if Zebra Technologies has been advised of the possibility of such damages. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Contents

About This Guide **4**

Icon Conventions 4

Notational Conventions 4

Service Information 5

Revision History 5

Pairing **7**

Connection Options 7

Tapping to Connect 8

Scanning to Connect 8

Connecting Through Available Devices 9

Connection Details 10

Connection Modes **13**

Desktop Mode 13

Mirror Mode 13

Settings **14**

Changing Settings 14

Pairing Best Practices **16**

About This Guide

This guide provides instructions for setting up and using the Zebra Wireless Connect app to transform the paired device and ZEC500 into a wireless workstation, enabling seamless integration and enhanced workstation functionality.

Icon Conventions

The documentation set is designed to give the reader more visual clues. The following visual indicators are used throughout the documentation set.



NOTE: The text here indicates information that is supplemental for you to know and that is not required to complete a task.



IMPORTANT: The text here indicates information that is important for you to know.

CAUTION: If the precaution is not heeded, you could receive a minor or moderate injury.



WARNING: If danger is not avoided, you CAN be seriously injured or killed.



DANGER: If danger is not avoided, you WILL be seriously injured or killed.

Notational Conventions

The following conventions make the content of this document easy to navigate.

- **Bold** text is used to highlight the following:
  - Dialog box, window, and screen names
  - Dropdown list and list box names
  - Checkbox and radio button names
  - Icons on a screen
  - Key names on a keypad
  - Button names on a screen

- Bullets (•) indicate:
  - Action items
  - List of alternatives
  - Lists of required steps that are not necessarily sequential
- Sequential lists (for example, those that describe step-by-step procedures) appear as numbered lists.

Service Information

If you have a problem with your equipment, contact Zebra Global Customer Support for your region.

Contact information is available at: zebra.com/support. When contacting support, have the following information available:

- Serial number of the unit
- Model number or product name
- Software/firmware type and version number

Zebra responds to calls by email, telephone, or fax within the time limits set forth in support agreements.

If your problem cannot be solved by Zebra Customer Support, you may need to return your equipment for servicing and will be given specific directions. Zebra is not responsible for any damages incurred during shipment if the approved shipping container is not used. Shipping the units improperly can possibly void the warranty.

If you purchased your Zebra business product from a Zebra business partner, contact that business partner for support.

Revision History

The following table describes the changes made for each revision.

Revision	Date	Description	Wireless Workstation Connect Version
-03	10/26	Updates in this version include: • Refreshed the application screenshots to align with the version 4.0 user interface. • Updated Connection Options to include notice of user interface layout variations between mobile computers and tablets.	4.0

Revision	Date	Description	Wireless Workstation Connect Version
		• Revised Tapping to Connect and Scanning to Connect to document the streamlined connection workflows.	
-02	9/26	Updates in this version include: • Enabling Peer-to-Peer Cast on ZEC500: Added direct wireless casting without needing the app on the workstation. • Scanning to Connect: Updated steps to pair by scanning a QR code shown on the monitor. • Connection Details: Noted that the app runs in the background once connected. • Mirror Mode: Noted that screen orientation is locked by the admin.	3.0
-01	10/25	Initial Release.	1.0

Pairing

This section explains connecting your mobile device to the ZEC500 Enterprise Computer using the pairing app.

Connection Options

This section describes the available connection options when pairing with the ZEC500.

IMPORTANT: The Zebra mobile computer and the ZEC500 can have lock screens enabled; however, both devices must be unlocked to establish a successful connection. Attempting to initiate a connection while either device is locked, results in issues.

NOTICE:

The user interface layout automatically adapts depending on your device type and physical orientation:

- **Mobile Computers (Handhelds):** Maintain a fixed, single-handed portrait layout.
- **Tablets:** Support dynamic auto-rotation, rearranging the user interface structurally between landscape and portrait orientations without altering the available functions.


Auto-rotation is supported on tablet devices only.

Once the Zebra Wireless Connect pairing app is installed, connect the mobile computer to the ZEC500 using one of the following options:

- **Tap To Connect**
- **Scan To Connect**
- **Show Available Devices**

The following figure illustrates the default portrait user interface layout of the landing page on a handheld mobile computer:

Figure 1 Zebra Wireless Connect Landing Page

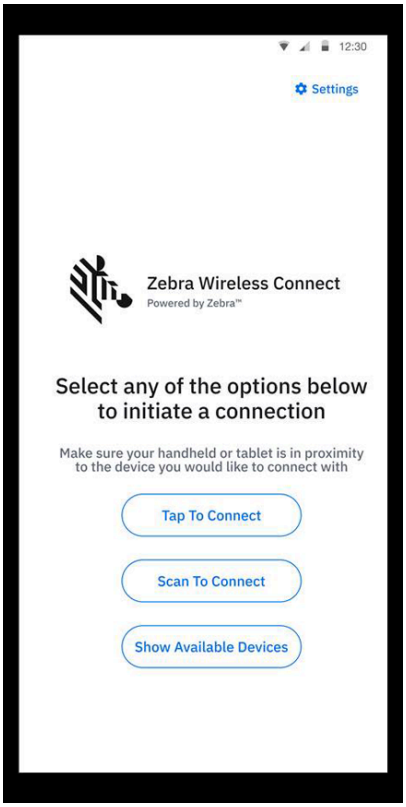

After the initial connection, you can set up auto-connect or connect through authentication for any following connection attempts.

Tapping to Connect

This section describes how to use the Tap To Connect feature to connect your mobile device with the ZEC500.

1. Check the location of the NFC antenna on your mobile computer.
2. Tap the mobile computer's NFC area against the ZEC500's designated NFC zone.

Scanning to Connect

Connect your mobile device to the ZEC500 by scanning the on-screen QR code.

1. On the ZEC500 device, open the QR code image on the external display:

   Navigate to **Files** > **Zebra Folders** > **enterprise/usr** > **WirelessConnect** and open `ScanToConnect_QRCode.png`.
2. On your mobile device, open the **WWC** app.
3. Aim the mobile device's scanner at the QR code displayed on the screen.
4. Press the scan button the mobile device.

   The mobile device connects to the ZEC500.

NOTE:

- The QR code file resides in a read-only directory and cannot be deleted or renamed.
- If the ZEC500 friendly name is changed, the QR code image updates automatically under the same filename.

Enabling Peer-to-Peer Cast on the ZEC500

Enable Peer-to-Peer (P2P) casting on the Zebra ZEC500 to allow supported mobile devices to discover, pair, and cast their screens wirelessly.

- Ensure the ZEC500 device is powered on and connected to an external display.
- Ensure DHCP Option 119 (Domain Search) is enabled on the network (enabled by default).

P2P casting is disabled by default on the ZEC500. It must be enabled directly through the device Settings UI or staged remotely by an administrator before end users can connect using Scan to Connect (QR code) or nearby device discovery.

IMPORTANT: Do not install the Wireless Workstation Connect app on the ZEC500.

1. On the ZEC500, open **Settings**.
2. Select **Connected devices** > **Connection preferences**.
3. Select **Cast receiver**.
4. Turn on the **Use cast receiver** toggle.

   The ZEC500 generates a connection QR code on the attached monitor and becomes discoverable as a cast receiver for nearby mobile devices running Wireless Workstation Connect.


The ZEC500 is now ready to receive casting sessions in Mirror Mode or Desktop Mode from supported Zebra mobile devices.

For mass deployment across multiple ZEC500 units, administrators can automate this configuration using StageNow with a Profile utilizing the **MX Wi-Fi CSP** to enable Wi-Fi Casting. Go to techdocs.zebra.com/wwc/latest/setup/ for more information on configuring with StageNow.

Connecting Through Available Devices

This section describes how to use the Show Available Devices feature to connect your mobile device with the ZEC500.

1. Tap **Show Available Devices**.
2. Tap **Connect** on the desired device.

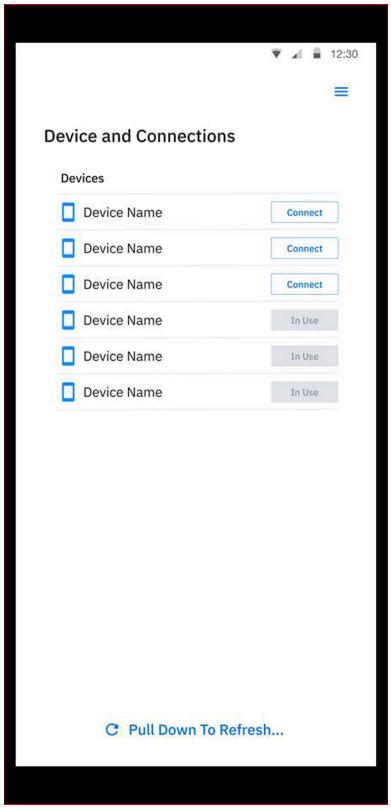

A dialog box alerts you that you are connected.

Connection Details

This section describes the active connection status, background behavior, and available controls on the Connection Details screen.

NOTE: Once the wireless connection is established, the Zebra Wireless Workstation Connect app automatically moves to the background, allowing you to use your mobile device normally. To view connection details, modify settings, or disconnect, swipe down from the top of the screen to access the notification panel or open the app from the Recent Apps screen.

When connected, the Connection Details screen displays the device name, serial number, and active connection mode.

Figure 2 Connection Details Screen



To activate a connection mode, tap **Mirror Mode** or **Desktop Mode**.

NOTE: When switching between Mirror Mode and Desktop Mode, the casting connection disconnects and automatically reconnects using the newly selected mode.

To disconnect, tap **Disconnect**.

NOTE: If the mobile device screen times out, the connection session automatically disconnects after 30 seconds.

To view your preference settings, tap . From here, you can toggle your preferences and set the desired proximity distance. Refer to Settings for more information.

Connection Modes

This section explains the two connection modes: Desktop and Mirror Mode.

Desktop Mode

The Desktop Mode is ideal if you are seeking the efficiency of a traditional desktop in a compact setup, it pairs seamlessly with Zebra's Workstation Connect software for enhanced functionality.

The Desktop Mode:

- Provides a comprehensive desktop-like experience, granting you access to all the features and functionalities typical of a traditional desktop environment.
- Enhances productivity by enabling document editing, web browsing, and multitasking with additional screen space. It supports multiple peripherals, including keyboards, mice, and external displays, allowing you to create a customized workstation.

While using Desktop Mode, you can take advantage of Zebra's Workstation Connect software. For more information, go to: zebra.com/support.

Mirror Mode

Mirror Mode enables you to seamlessly cast your mobile computer's screen onto the ZEC500's external display. This functionality transforms your device into a versatile tool for sharing and showcasing content effortlessly.

Mirror Mode allows you to mirror your mobile device's screen onto a larger display for presentations, demonstrations, or collaborative work. It provides an optimal viewing experience for photos, videos, and apps on a bigger screen. The setup is quick and seamless, ensuring a smooth transition from mobile to a larger display.

NOTE: Display orientation in Mirror Mode is configured and managed by your system administrator. When configured for portrait orientation, the external display automatically mirrors the device screen in portrait layout.

Settings


The Wireless Workstation Connect app's settings section allows you to automatically connect and disconnect at certain ranges.

NOTE: Bluetooth must be enabled for Auto Disconnect and Auto Connection to work.


Changing Settings

This section describes how to change the settings.

1. Go to the home screen and tap **Settings**.

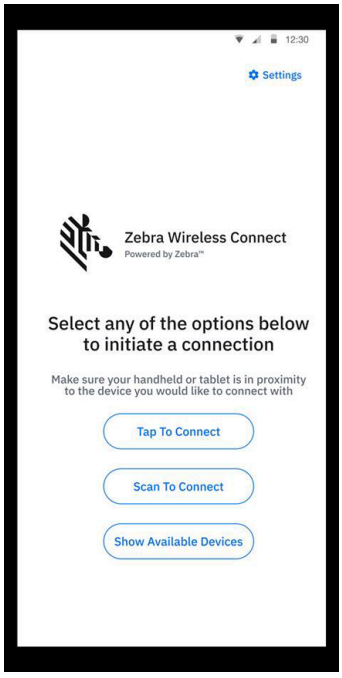

The Settings screen displays.

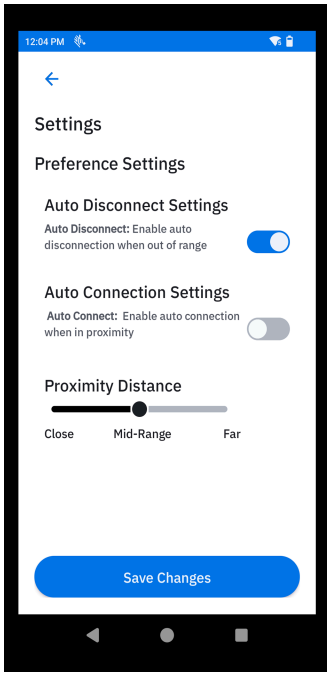

2. To enable the **Auto Connection**, tap the toggle switch.
3. To enable the **Auto Disconnection**, tap the toggle switch.
4. To customize the distance at which the device will automatically connect or disconnect, adjust the **Proximity Distance** to your preferred distance.
   - **Close** (2 ft. / 0.6 m)
   - **Mid-Range** (5 ft. / 1.5 m)
   - **Far** (15 ft. / 4.6 m)

   NOTE: The range of connection proximity can be significantly influenced by environmental factors, such as walls or other physical barriers. These obstacles can obstruct the wireless signal, reducing its effective range and potentially impacting the overall performance of the connection.

   IMPORTANT: After establishing a wireless connection using Auto-Connect, wait 15 to 30 seconds before moving away from the workstation area to ensure connection stability.
5. Tap **Save Changes**.

Pairing Best Practices

This section lists best practices for pairing to the ZEC500 device with the Wireless Workstation Connect app.

- Device Naming: Special characters, such as symbols, punctuation, or emojis, are not supported.
- Software Updates: Keep your ZEC500 device and mobile computer's software up to date, to benefit from the latest improvements and fixes.