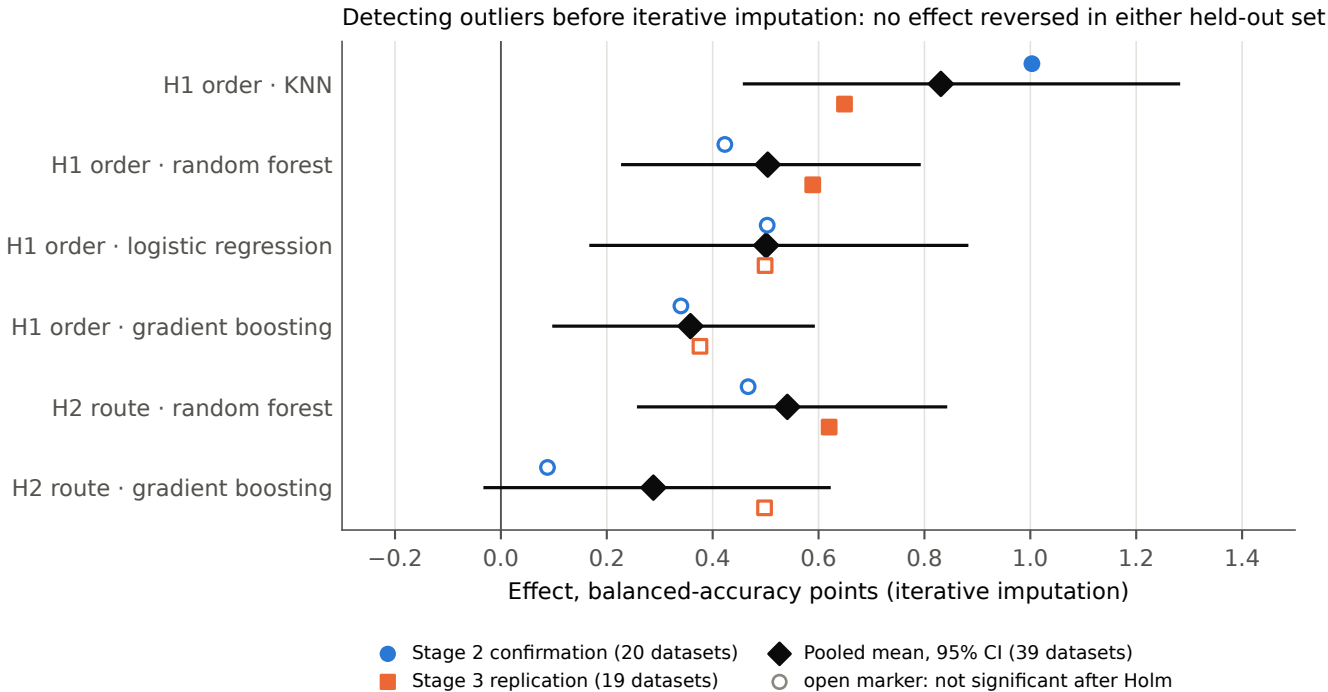
Detecting outliers before iterative imputation: no effect reversed in either held-out set
H1 order · KNN
H1 order · random forest
H1 order · logistic regression
H1 order · gradient boosting
H2 route · random forest
H2 route · gradient boosting
−0.2
0.0
0.2
0.4
0.6
0.8
1.0
1.2
1.4
Effect, balanced-accuracy points (iterative imputation)
Stage 2 confirmation (20 datasets)
Stage 3 replication (19 datasets)
Pooled mean, 95% CI (39 datasets)
open marker: not significant after Holm