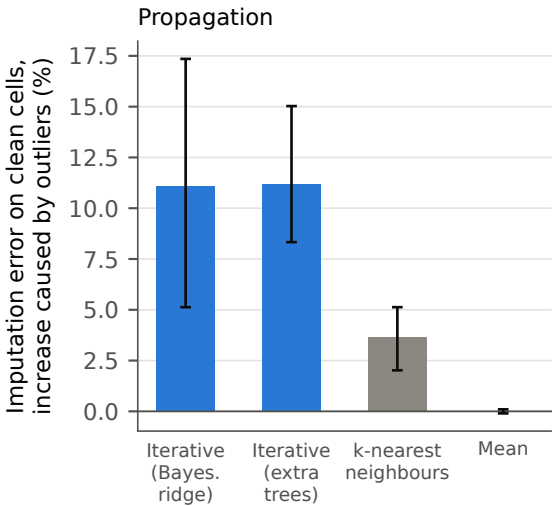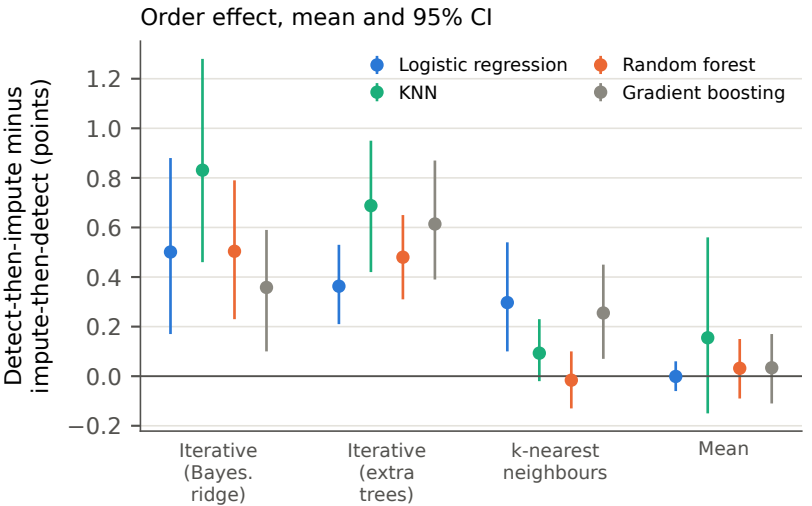Iterative imputers, linear or tree-based, propagate outliers; neighbour and mean imputation barely do