

How to use Alpeta Swagger API (Applied from Alpeta v1.6.30.0)

Global Technical Support Team

2025-11




Contents

1. Initial Setup
2. How to change Server IP in API Swagger Page
3. API Swagger Test




Initial Setup

Initial screen when user login Alpeta server

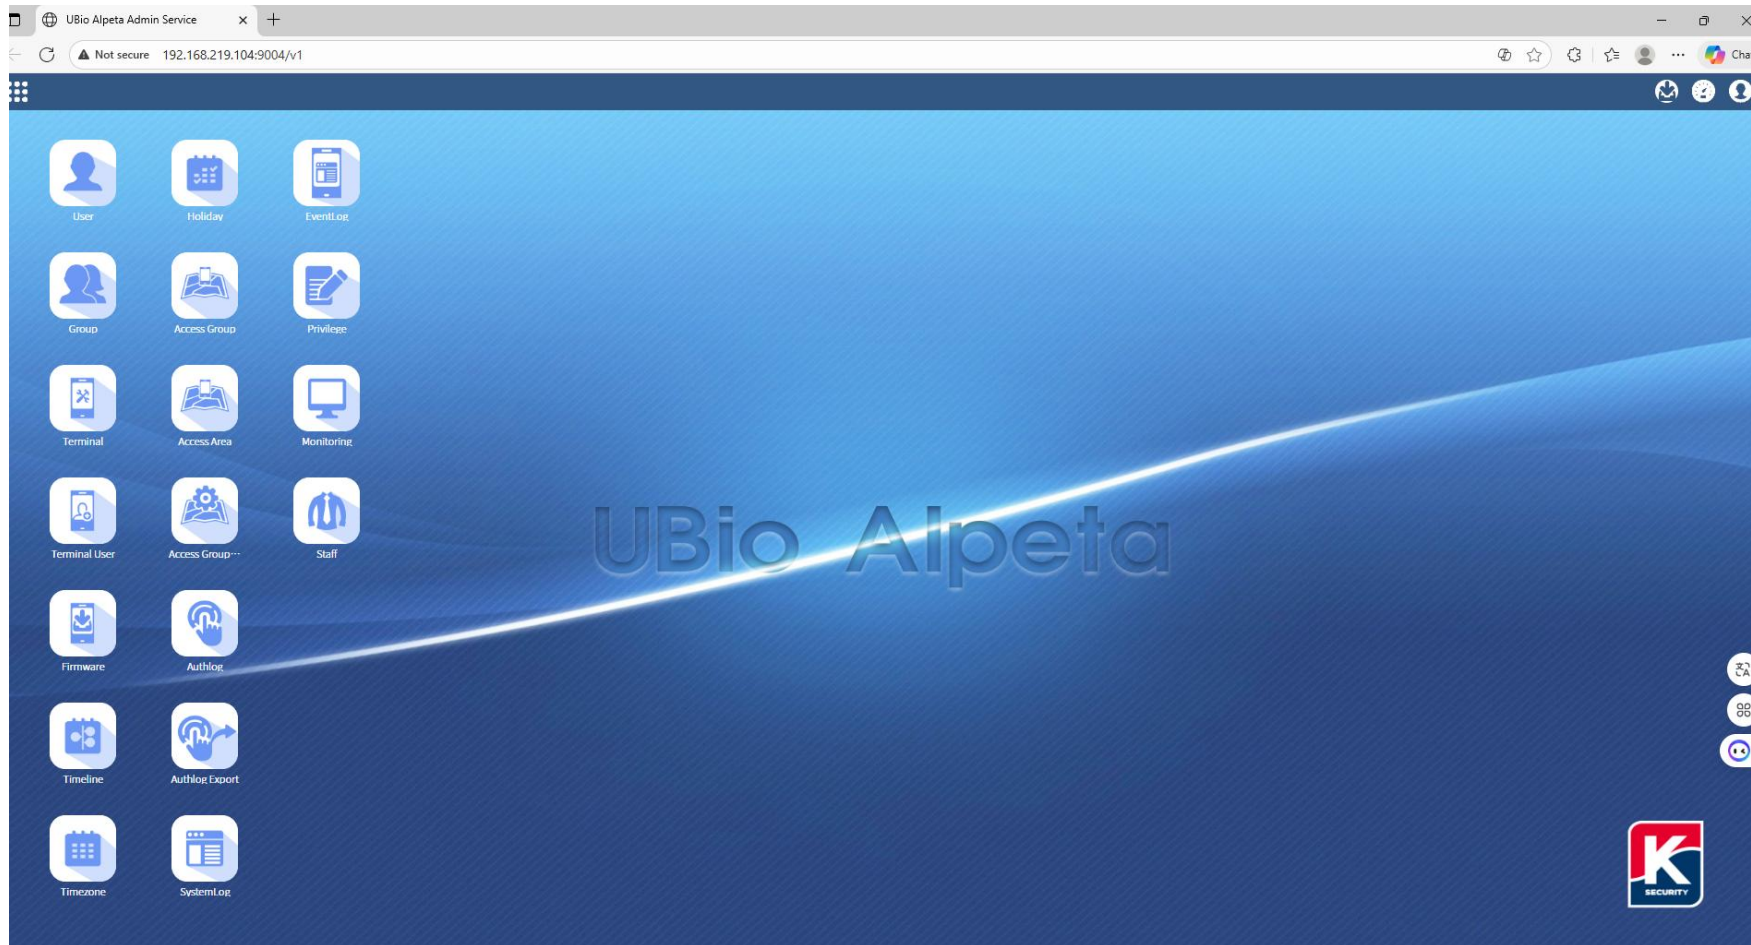

Initial Setup

When user put “/docs” to the Alpeta URL, API swagger page opens.

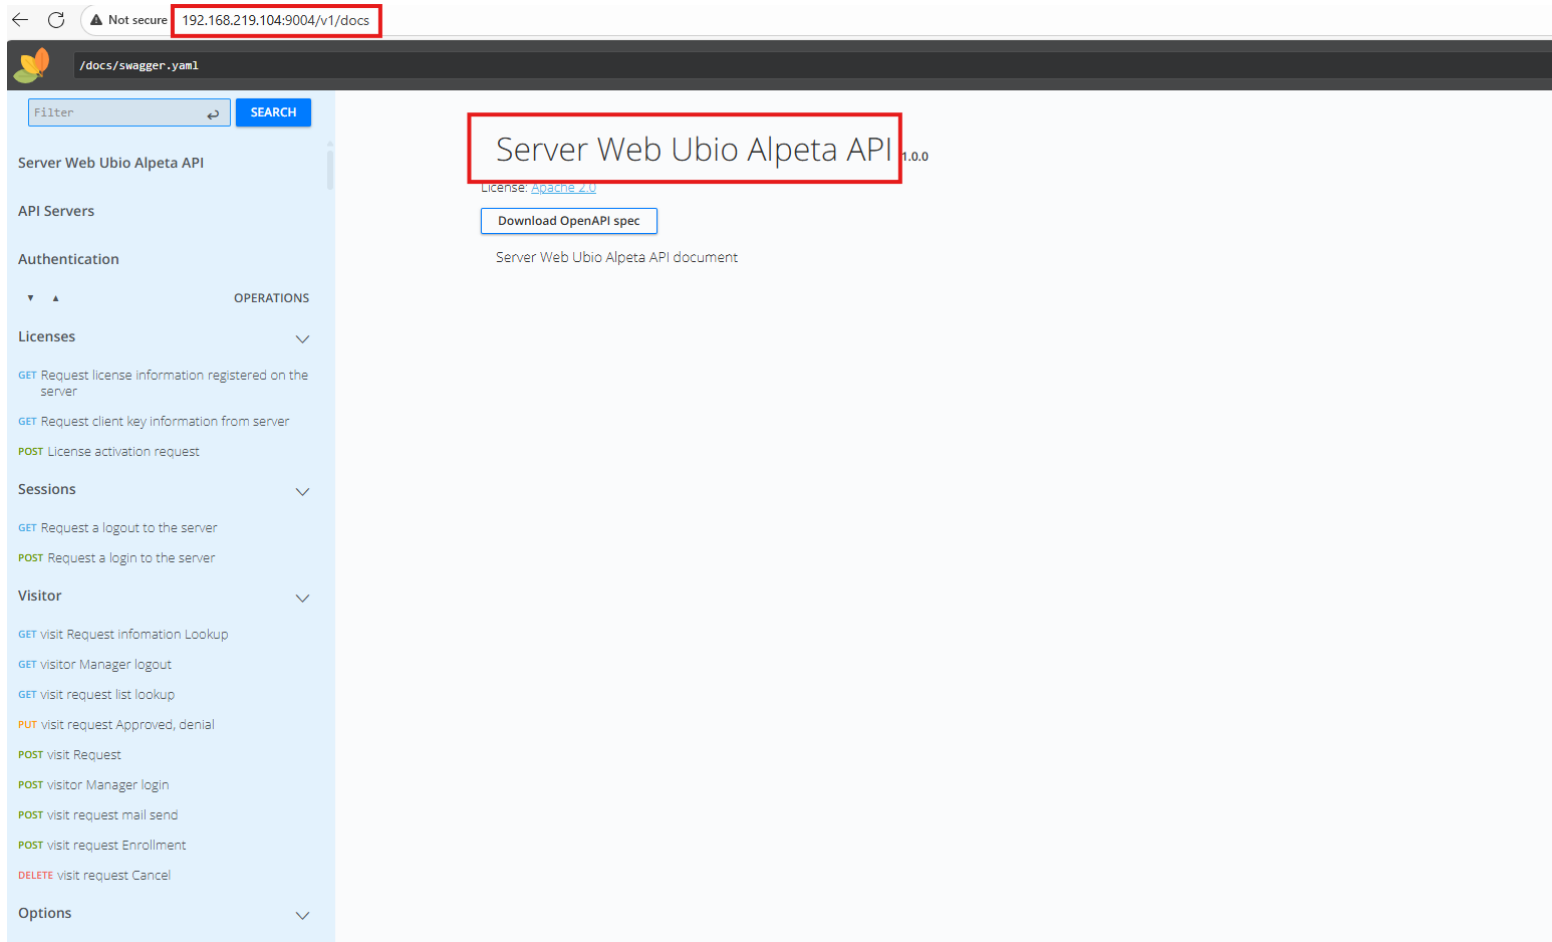



Initial Setup

The initial API Server is set with default server IP "192.168.30.169". User has to change the server IP to where Alpeta server is installed.

Server Web Ubio Alpeta API

API Servers

Authentication

▼ ▲ OPERATIONS

Licenses ▼
[GET](#) Request license information registered on the server
[GET](#) Request client key information from server
[POST](#) License activation request

Sessions ▼
[GET](#) Request a logout to the server
[POST](#) Request a login to the server

Visitor ▼
[GET](#) visit Request information Lookup
[GET](#) visitor Manager logout
[GET](#) visit request list lookup
[PUT](#) visit request Approved, denial
[POST](#) visit Request
[POST](#) visitor Manager login
[POST](#) visit request mail send
[POST](#) visit request Enrollment

Request a login to the server

[POST](#) /login

REQUEST

REQUEST BODY* application/json
Login request object

[EXAMPLE](#) [SCHEMA](#)

```
{  "userId": "0001",  "password": "1111",  "userType": 0}
```

[API Server](#) http://192.168.30.169:9004/v1
Authentication Not Required

RESPONSE

[200](#) [405](#)

successful operation

[EXAMPLE](#) [SCHEMA](#)



How to change Server IP in API Swagger Page

Check the Server IP of the Alpeta Server

- Go to Command Prompt and command "ipconfig".

```
Command Prompt
Microsoft Windows [Version 10.0.26100.7171]
(c) Microsoft Corporation. All rights reserved.
C:\Users\Seojin Yang>ipconfig

Windows IP Configuration

Wireless LAN adapter 로컬 영역 연결* 1:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Wireless LAN adapter 로컬 영역 연결* 2:


    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Wireless LAN adapter Wi-Fi:

    Connection-specific DNS Suffix  . : Davolink
    IPv6 Address. . . . . : 2406:5900:11b7:8e04:605c:d9ec:e9c9:dd4b
    Temporary IPv6 Address. . . . . : 2406:5900:11b7:8e04:acd3:3fc9:b289:f0f7
    Link-local IPv6 Address . . . . . : fe80::21fd:9954:7e71:3111%17
    IPv4 Address. . . . . : 192.168.219.104
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : fe80::82ca:4bff:fe3e:518d%17
                                192.168.219.1
```

How to change Server IP in API Swagger Page

Go to Window folder path C:\Program Files\UnionCommunity\UBio Alpeta\docs
Backup the swagger yaml file and right click "Edit in Notepad"

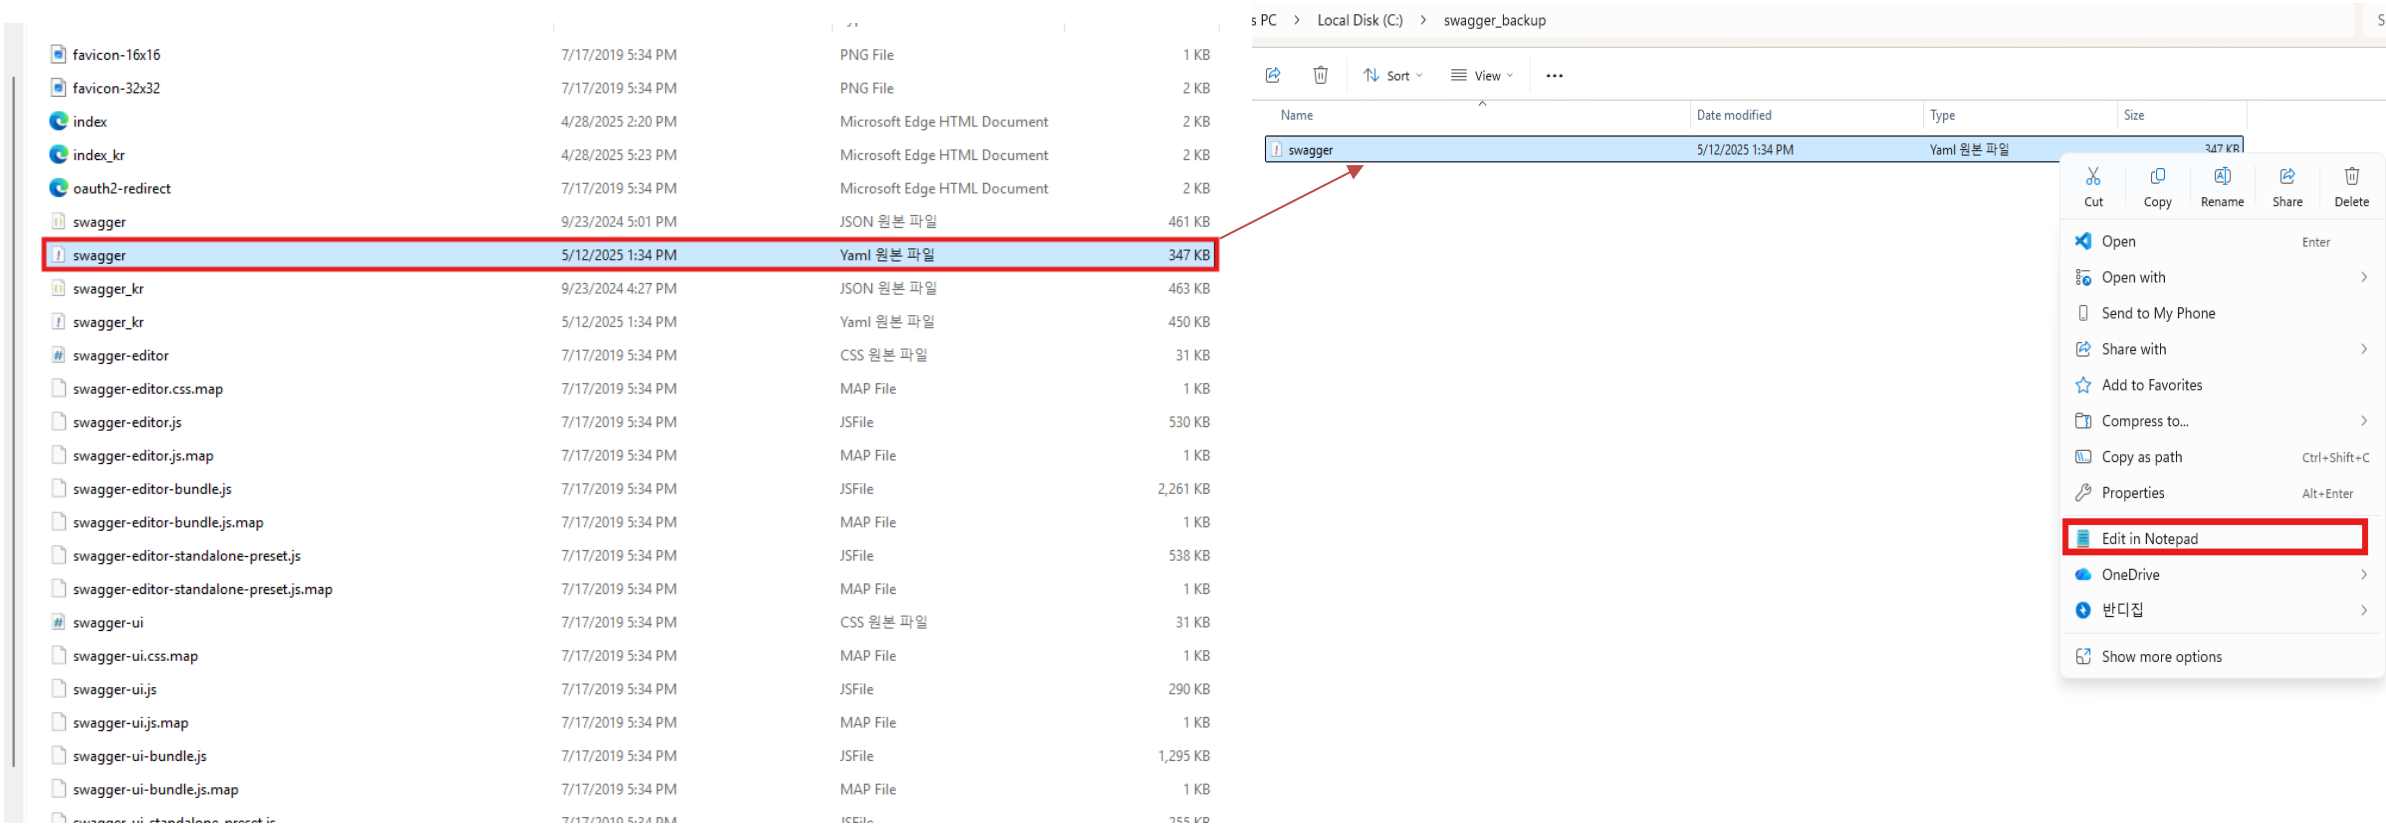



How to change Server IP in API Swagger Page


Change the server IP in the swagger yaml file and save.

```
swagger: "2.0"
info:
  description: Server Web Ubio Alpeta API document
  version: 1.0.0
  title: Server Web Ubio Alpeta API
  license:
    name: Apache 2.0
    url: http://www.apache.org/licenses/LICENSE-2.0.html
  host: 192.168.30.169:9004
  basePath: /v1
tags:
  - name: licenses
    description: License —anagement
  - name: sessions
    description: Session manamement
  - name: visitor
    description: visitor
  - name: options
    description: Option management
  - name: users
    description: User management
  - name: blacklists
    description: Blacklist management
  - name: privileges
    description: Privilege Management
  - name: groups
    description: Group management
  - name: positions
    description: position management
  - name: notices
    description: notice managemement
```

```
swagger: "2.0"
info:
  description: Server Web Ubio Alpeta API document
  version: 1.0.0
  title: Server Web Ubio Alpeta API
  license:
    name: Apache 2.0
    url: http://www.apache.org/licenses/LICENSE-2.0.html
  host: 192.168.219.104:9004
  basePath: /v1
tags:
  - name: licenses
    description: License —anagement
  - name: sessions
    description: Session manamementsS
  - name: visitor
    description: visitor
  - name: options
    description: Option management
  - name: users
    description: User management
  - name: blacklists
    description: Blacklist management
  - name: privileges
    description: Privilege Management
  - name: groups
    description: Group management
  - name: positions
    description: position management
  - name: notices
```


How to change Server IP in API Swagger Page


Copy the backup file and paste it to the swagger folder.

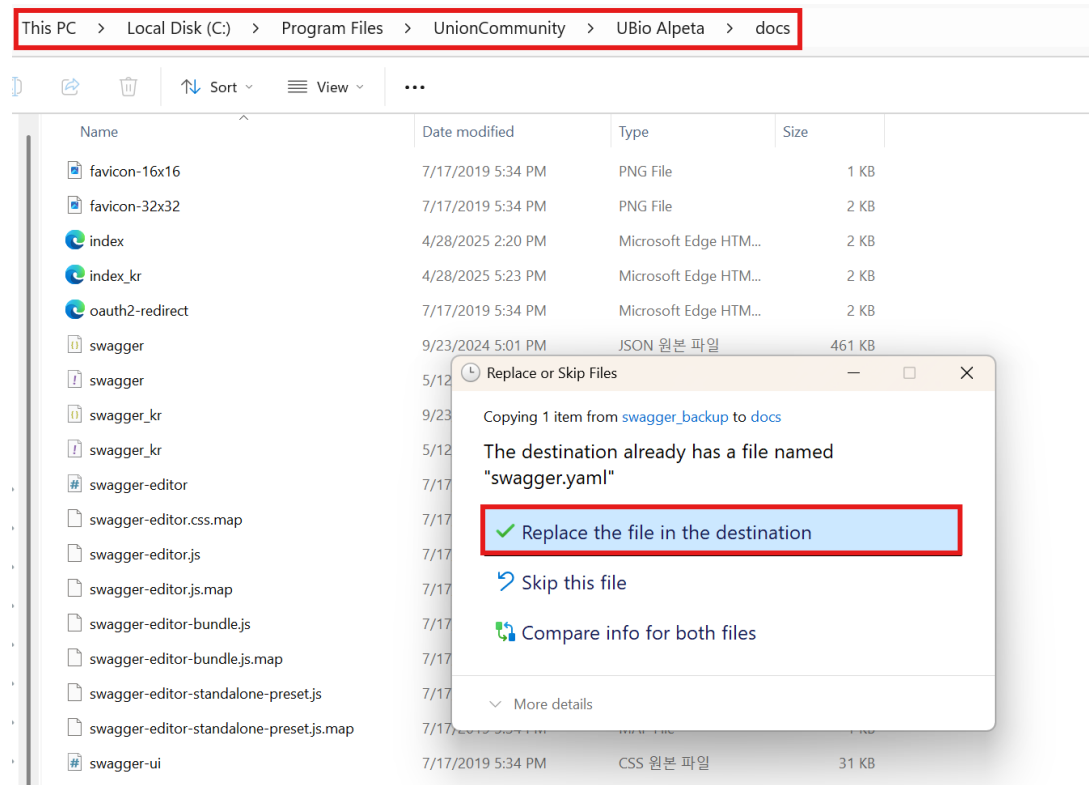



How to change Server IP in API Swagger Page

Hard reload the Swagger API page to update the modification.

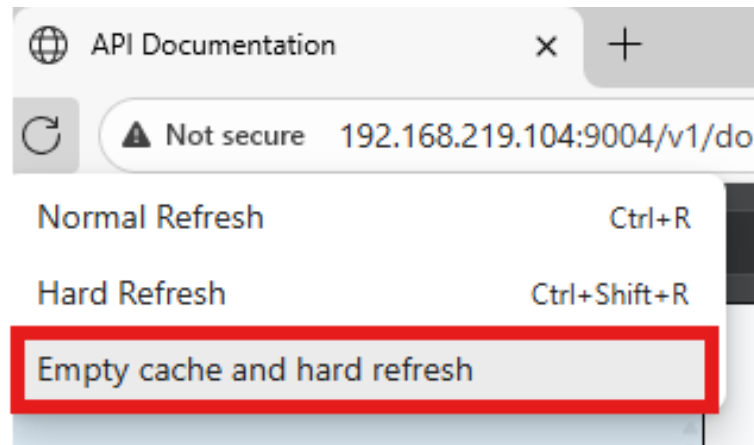

How to change Server IP in API Swagger Page

API server IP has been changed.

The screenshot shows a web browser window with the URL `192.168.219.104:9004/v1/docs#post-/login`. The page displays the Swagger API documentation for 'Server Web Ubio Alpeta API'. The left sidebar lists various endpoints, with 'POST Request a login to the server' under the 'Sessions' section highlighted. The main content area shows the details for this endpoint, including the request body (Login request object) and an example JSON object. At the bottom of the page, the 'API Server' URL is displayed as `http://192.168.219.104:9004/v1`, which is highlighted with a red box. The 'Authentication' status is shown as 'Not Required'.



API Swagger Test

Try testing the response on the swagger request to check if the API server IP has changed successfully.

- Response Status: Failed to fetch (CORS or Network Issue) => API Server IP **NOT** Changed
- Response Status: OK:200 =>) => API Server IP Changed

The screenshot shows the Swagger UI interface. At the top, a red box highlights the text "Response Status: Failed to fetch (CORS or Network Issue)". Below this, there are three tabs: "RESPONSE", "RESPONSE HEADERS", and "CURL". The "RESPONSE" tab is selected, and a red box highlights a small icon of an hourglass, indicating a timeout or failure.

The screenshot shows the Swagger UI interface. At the top, a red box highlights the text "Response Status: OK:200". Below this, it says "Took 12 milliseconds". There are three tabs: "RESPONSE", "RESPONSE HEADERS", and "CURL". The "RESPONSE" tab is selected, and it displays a JSON response:

```
{
  "Result": {
    "ResultCode": 0
  },
  "AccountInfo": {
    "UserID": 10000000000000000000,
    "UniqueID": "",
    "Uuid": "5df2bf77-f1e6-4fb1-418b-27cd69d8e300",
    "Name": "Master",
    "LoginPW": "",
    "Privilege": 1,
    "FirstLoginFlag": 0,
    "ServerID": 11,
    "LoginAllowed": 1,
    "LoginFailCount": 0,
  }
}
```