The Linux (Debian & Ubuntu) installation guide Of VDX-6390-D

In the DX platform, there with the newer IDE and Ethernet controller, the main both of controllers just start supported from kernel 2.6.28.3. For now before the Linux distributor release the kernel (above 2.6.28.3) that supported IDE and Ethernet of DX platform. Please refer to this guide to help you complete the Linux installation.

Procedure1
How to install Linux on VDX?

Preparation:

1. The Linux installation DISC (Ubuntu7.10, 8.04, 9.04, Debian4.0, 5.0)
2. A completely formatted storage (CF)
3. Intel/AMD platform Personal Computer
4. Confirm the BIOS setting,

    Advanced\

        IDE Configuration\ IDE mode >> ***Native mode***

        IDE Configuration\ Standard IDE Compatible >> ***Enable***

        USB Configuration\ USB 2.0 Controller Mode >> ***Fullspeed***

PS: The completely formatted storage is helpful to avoid some unexpected error in the procedure.


After you plug all the devices and ready to install, please follow the steps as below:

Step1:

Please follow the standard procedure to install the Linux OS base on the ***Intel or AMD*** platform first, and make sure your Linux can boot up normally, after install completed.



The Ubuntu login

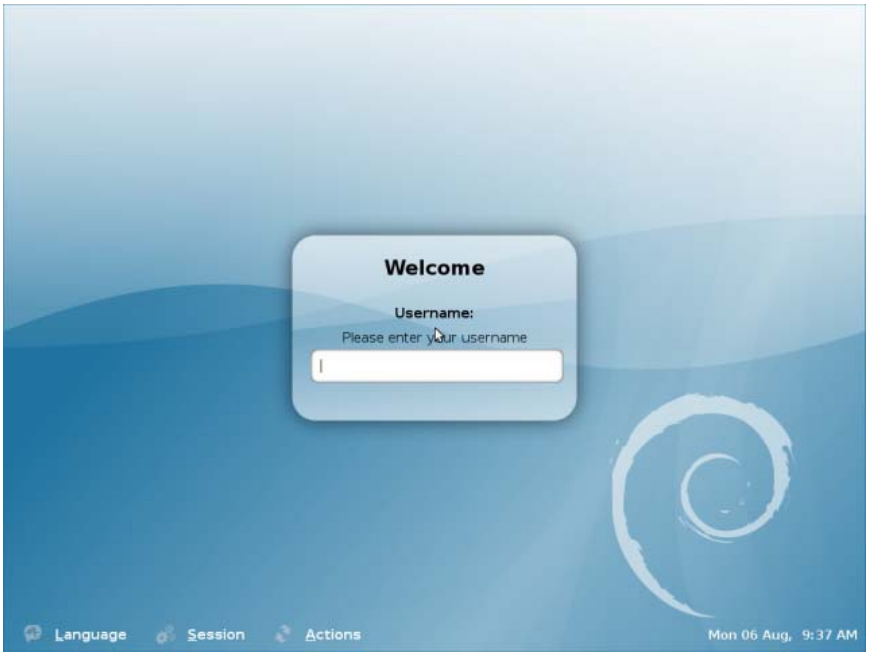


The Debian login

Step2:

1. Please copy the .deb file (kernel package) that DMP provided into your USB pen driver or other removable storage.

2. Press Ctrl+Alt+F1 keys to enter text mode.d

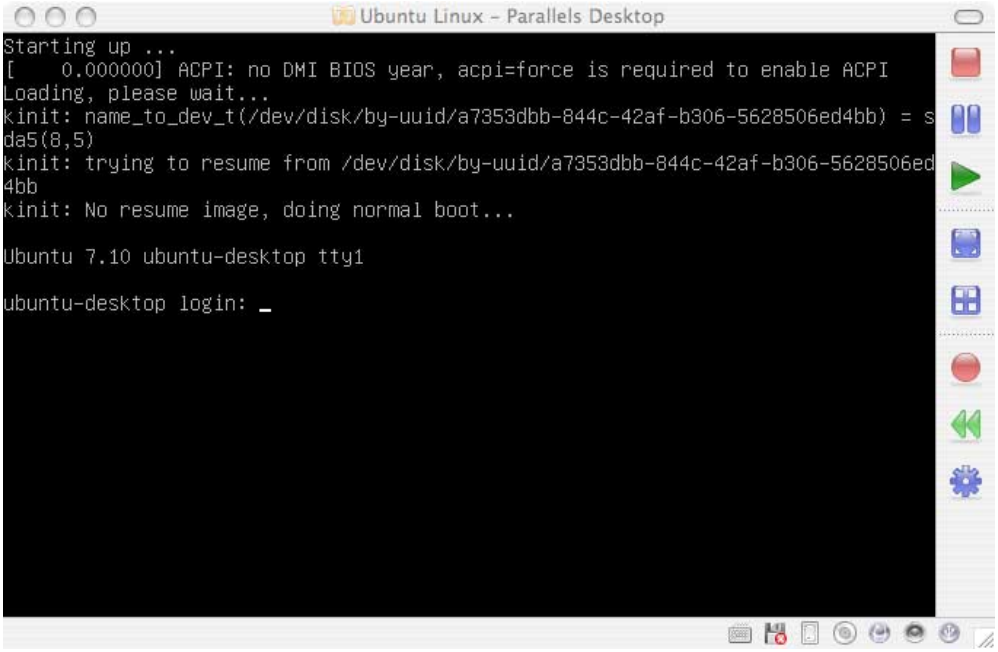

Enter your user name and password.

3. Plug on the USB pen driver and try to mount it as mnt.

```
#sudo su
#mount /dev/sda1 /mnt
#cd /mnt
Confirm the actual codename to mount.
```

4. To unpack the kernel package and update.

```
# dpkg -i xxx.deb
# update-initramfs –k 2.6.30-vortex86mx -c
# update-grub
```

5. When these three procedures completed, type ***reboot*** to reboot system.

```
# reboot
```

Step3:


Moving the storage installed Linux, back to VDX platform,

Step4:

Turn on the power.

For Ubuntu

When it tart booting, press the Esc key when it boot. Confirm the Grub list first. There should has an option **2.6.30-vortex86mx**, and then to boot.

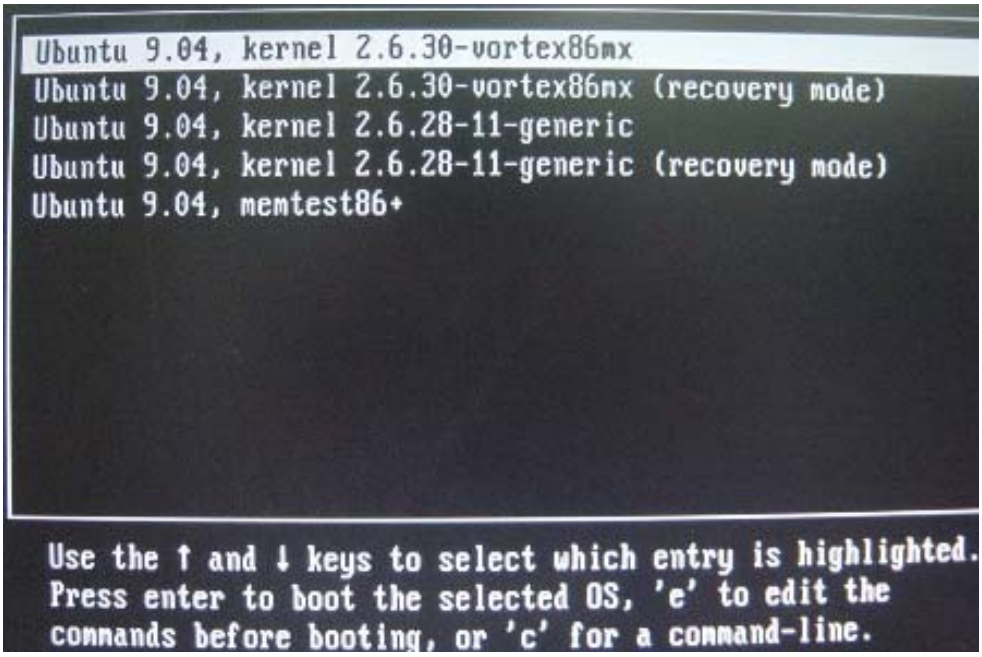

For Debian

Please press the Esc key to confirm Grub list and press E key to confirm and modify the storage's codename.



PS: The Grub list parameters you can modify in the file /boot/grub/menu.lst.

Procedure2.

How to install the VGA driver of VDX?

Preparation:

1. The VGA driver DMP provided for VDX platform

Step1:

1. Copy the whole XGI folder to USB pen driver first.

2. Confirm what Xorg version your system using?

Ubuntu8.04	Xorg1.**4**
Ubuntu9.04	Xorg1.**6**
Debian4.0	Xorg1.**3**
Debian5.0	Xorg1.**4.2**

3. Plug on the USB pen driver and try to mount the storage, and enter the folder that version your system using.

Step2:

Copy the fit version of driver to driver folder:

```
#sudo su
```

Execute as root

```
#mount /dev/sda1 /mnt
```

Mount the USB storage to used

```
#cd /mnt/…../1.X/2.xx.xx/IA32/xgipkg_Xorg8_i386/
```

Enter the correct folder of Xorg that your system operating

```
#sh install.sh
```

Install the driver file

```
#/etc/init.d/gdm restart
```

Restart the GDM