


Week 6: Cisco Device Management (10 Marks)

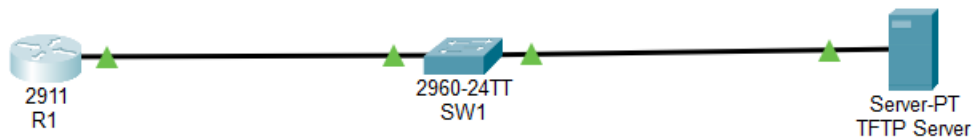

48. backup running-config

```
Router>ena
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#exit
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#copy running-config tftp:
Address or name of remote host []? 10.10.10.10
Destination filename [R1-config]?

Writing running-config....!!
[OK - 701 bytes]

701 bytes copied in 3.026 secs (231 bytes/sec)
R1#
```

IOS name

```
-----
R1#show flash:

System flash directory:
File Length Name/status
 3 33591768 c2900-universalk9-mz.SPA.151-4.M4.bin
 2 28282 sigdef-category.xml
 1 227537 sigdef-default.xml
[33847587 bytes used, 221896413 available, 255744000 total]
249856K bytes of processor board System flash (Read/Write)

R1#
```

[illegible]

```

monitors. Command EXEC aborted due to user interruption
rommon 1 > confreg 0x2142
rommon 2 > reset
System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 2010 by cisco Systems, Inc.
Total memory size = 512 MB - On-board = 512 MB, DIMM0 = 0 MB
CISCO2911/K9 platform with 524288 Kbytes of main memory
Main memory is configured to 72/-1(On-board/DIMM0) bit mode with ECC disabled

Readonly ROMMON initialized

program load complete, entry point: 0x80803000, size: 0x1b340
program load complete, entry point: 0x80803000, size: 0x1b340

IOS Image Load Test

Digitally Signed Release Software
program load complete, entry point: 0x81000000, size: 0x3bcd3d8
Self decompressing the image :
##### [OK]
Smart Init is enabled
smart init is sizing iomem

          TYPE          MEMORY_REQ
Onboard devices &
  buffer pools      0x022F6000
-----
TOTAL:      0x022F6000

Rounded IOMEM up to: 36Mb.
Using 6 percent iomem. [36Mb/512Mb]

```

```

!
hostname R1
enable secret 5 $1$mERr$NJdjwh5wX8Ia/X8aC4RIu.
enable password PACKET
line vty 0 4
password TRACER
!
interface Vlan1
no shutdown
ip address 10.10.10.2 255.255.255.0
!
interface GigabitEthernet0/0
shutdown
no ip address
!
interface GigabitEthernet0/1
shutdown
no ip address
!
interface GigabitEthernet0/2
shutdown
no ip address
!
end

[0] Go to the IOS command prompt without saving this config.
[1] Return back to the setup without saving this config.
[2] Save this configuration to nvram and exit.

Enter your selection [2]:

```

```

Router>ena
Router#copy startup-config running-config
%% Non-volatile configuration memory invalid or not present
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#enable secret CISCO
Router(config)#line con 0
Router(config-line)#password PACKET
Router(config-line)#exit
Router(config)#config-register 0x2142
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
Router#reload
Proceed with reload? [confirm]c
Router#

```

50.factory reset

```
Router#erase startup-config
Erasing the nvram filesystem will remove all configuration files! Continue?
[confirm]
[OK]
Erase of nvram: complete
%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram
Router#reload
Proceed with reload? [confirm]
System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 2010 by Cisco Systems, Inc.
Total memory size = 512 MB - On-board = 512 MB, DIMM0 = 0 MB
CISCO2911/K9 platform with 524288 Kbytes of main memory
Main memory is configured to 72/-1(On-board/DIMM0) bit mode with ECC disabled

Readonly ROMMON initialized

program load complete, entry point: 0x80803000, size: 0x1b340
program load complete, entry point: 0x80803000, size: 0x1b340

IOS Image Load Test

Digitally Signed Release Software
program load complete, entry point: 0x81000000, size: 0x3bcd3d8
Self decompressing the image :
##### [OK]
Smart Init is enabled
smart init is sizing iomem
      TYPE          MEMORY_REQ
Onboard devices &
  buffer pools      0x022F6000
-----
TOTAL:              0x022F6000
Rounded IOMEM up to: 36Mb.
Using 6 percent iomem. [36Mb/512Mb]

Restricted Rights Legend
```

51.restored

```
Router>ena
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#exit
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#copy running-config tftp:
Address or name of remote host []? 10.10.10.10
Destination filename [R1-config]?

Writing running-config....!!
[OK - 701 bytes]

701 bytes copied in 3.026 secs (231 bytes/sec)
R1#
```

R1#|