

JancoVanWyk 20240404

PRACTICAL 5: CISCO DEVICE ACCESS AND BASIC CONFIGURATION

Objective


Access Cisco IOS and perform basic device configuration.

Equipment

- Console Cables
- Cisco 1941 Router
- Cisco ISR4331 Router
- Cisco Catalyst 3560 Switch


Activities

1. Access Cisco devices using console cables.
2. Configure hostname.
3. Configure passwords.
4. Configure login banner.
5. Save configurations.

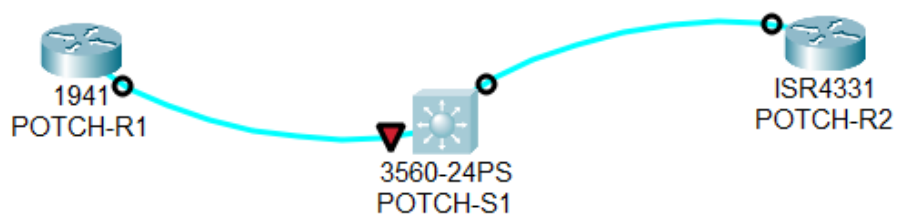

Configurations

ROUTER 1941: POTCH-R1

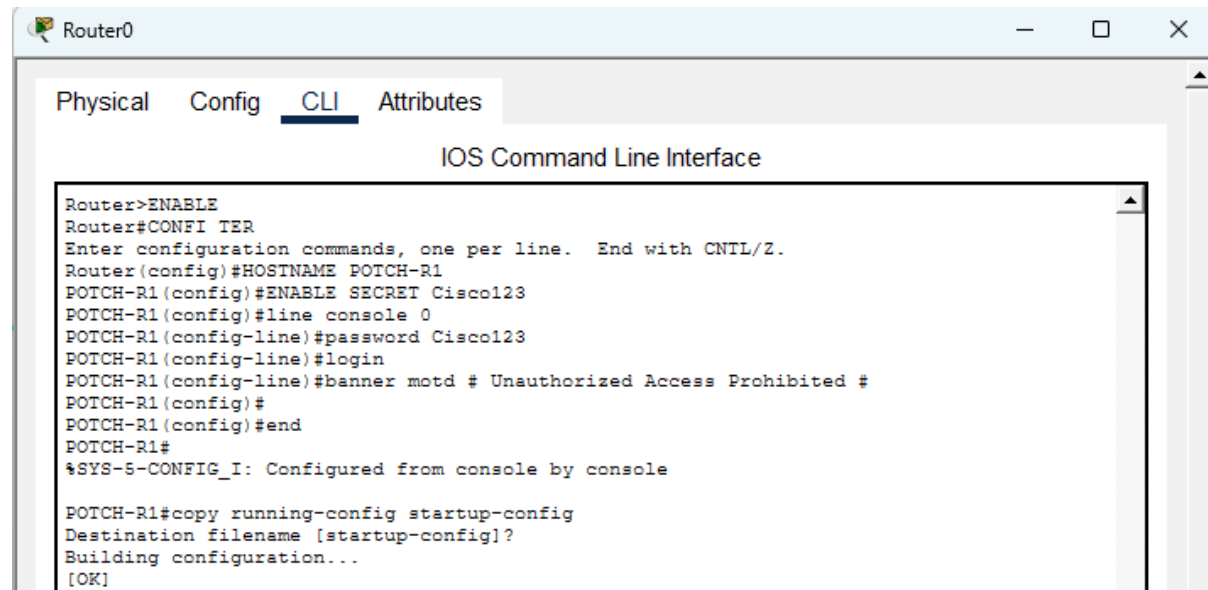


The screenshot shows a window titled "Router0" with tabs for Physical, Config, CLI, and Attributes. The CLI tab is active, displaying the "IOS Command Line Interface". The terminal output shows the following commands and responses:

```
Router>ENABLE
Router#CONF T ER
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#HOSTNAME POTCH-R1
POTCH-R1(config)#ENABLE SECRET Cisco123
POTCH-R1(config)#line console 0
POTCH-R1(config-line)#password Cisco123
POTCH-R1(config-line)#login
POTCH-R1(config-line)#banner motd # Unauthorized Access Prohibited #
POTCH-R1(config)#
POTCH-R1(config)#end
POTCH-R1#
%SYS-5-CONFIG_I: Configured from console by console

POTCH-R1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
```

SWITCH 3560: POTCH-S1

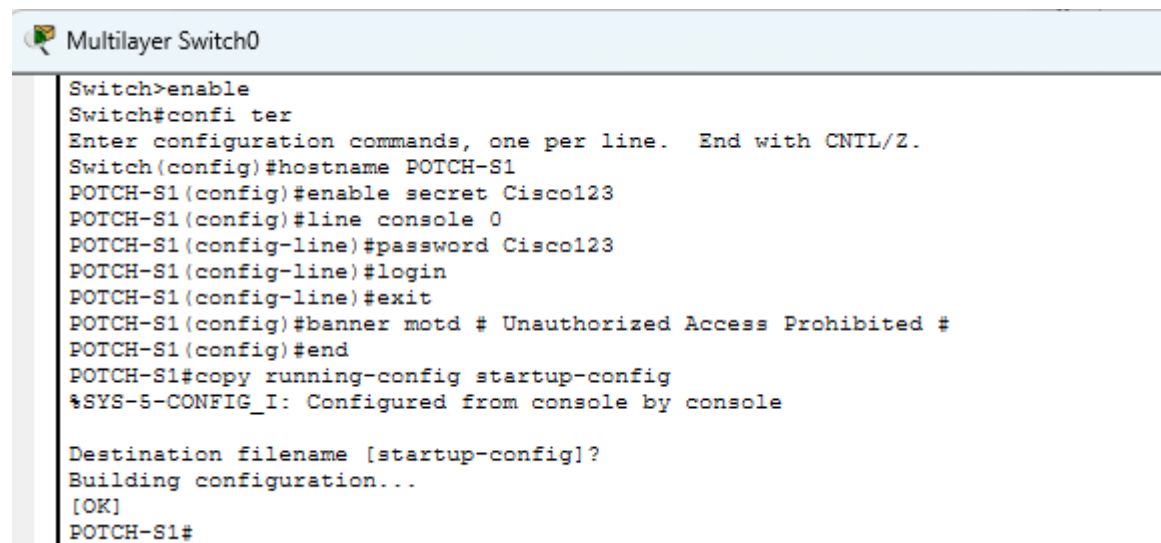

The screenshot shows a window titled "Multilayer Switch0" with a CLI tab active, displaying the "IOS Command Line Interface". The terminal output shows the following commands and responses:

```
Switch>enable
Switch#confi ter
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname POTCH-S1
POTCH-S1(config)#enable secret Cisco123
POTCH-S1(config)#line console 0
POTCH-S1(config-line)#password Cisco123
POTCH-S1(config-line)#login
POTCH-S1(config-line)#exit
POTCH-S1(config)#banner motd # Unauthorized Access Prohibited #
POTCH-S1(config)#end
POTCH-S1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
POTCH-S1#
```

ROUTER 4331: POTCH-R2

 Router1


```
Router>ENABLE
Router#CONF T ER
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname POTCH-R2
POTCH-R2(config)#enable secret Cisco123
POTCH-R2(config)#LINE CONSOLE 0
POTCH-R2(config-line)#password Cisco123
POTCH-R2(config-line)#login
POTCH-R2(config-line)#exit
POTCH-R2(config)#banner motd # Unauthorized Access Prohibited #
POTCH-R2(config)#end
POTCH-R2#
%SYS-5-CONFIG_I: Configured from console by console

POTCH-R2#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
POTCH-R2#
```

Verification:

ROUTER 1941: POTCH-R1


show running-config

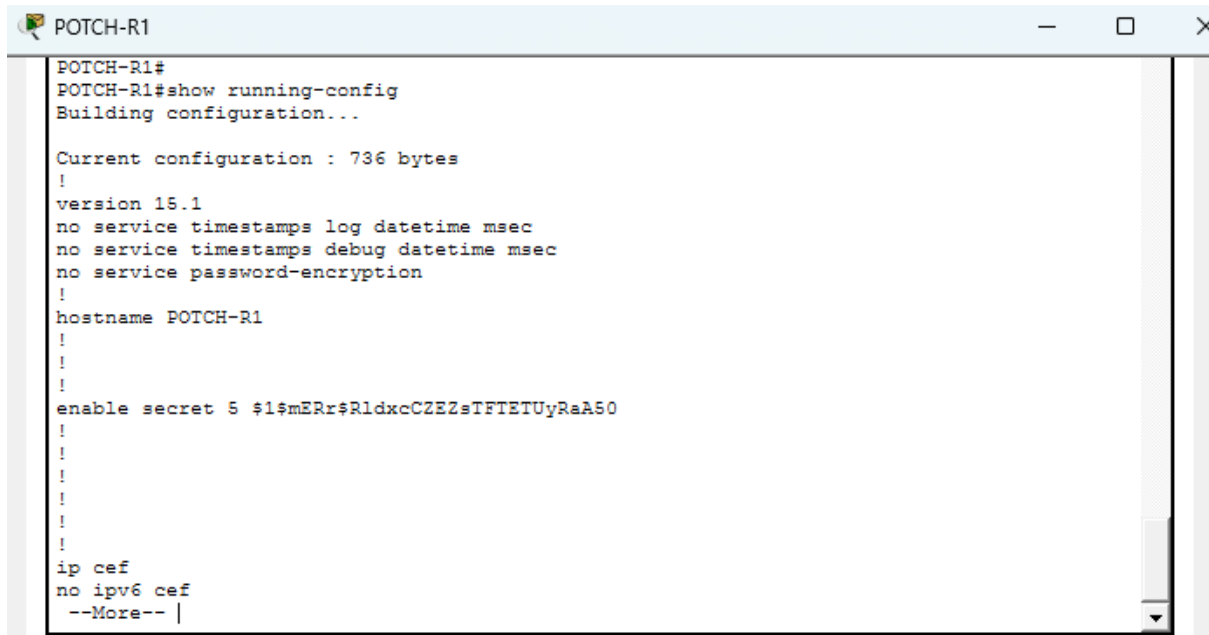

```
POTCH-R1#
POTCH-R1#show running-config
Building configuration...

Current configuration : 736 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname POTCH-R1
!
!
!
enable secret 5 $1$mERr$RldxcCZEZsTFTETUyRaA50
!
!
!
!
!
!
ip cef
no ipv6 cef
--More-- |
```

show startup-config

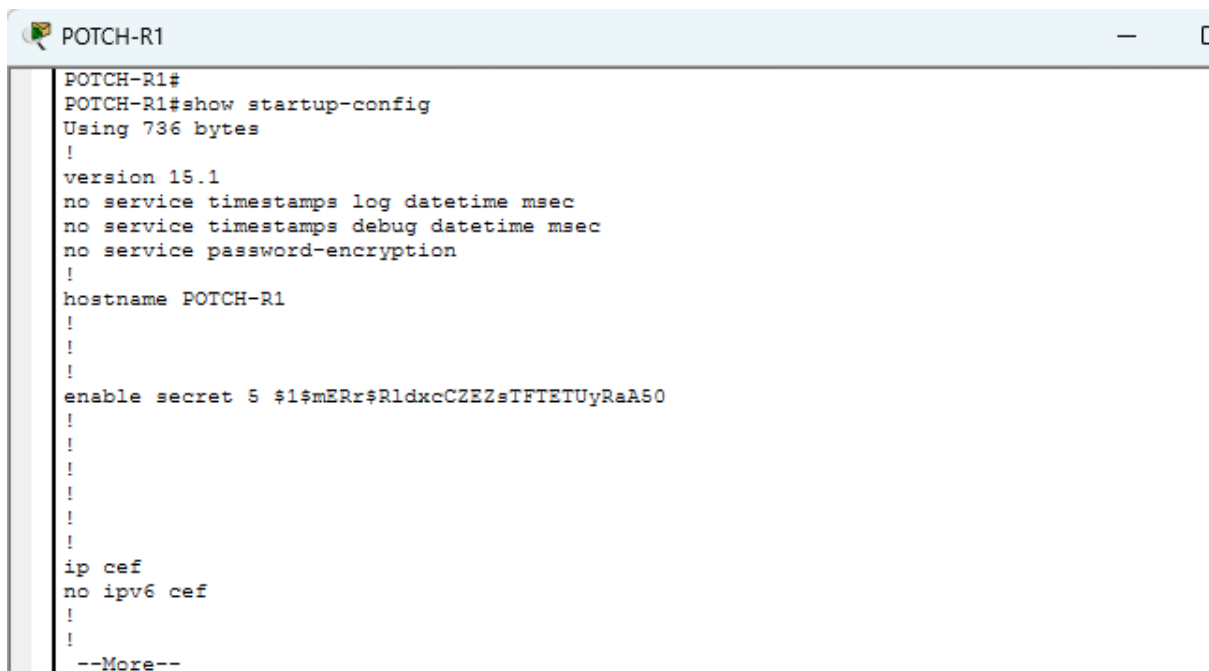

```
POTCH-R1#
POTCH-R1#show startup-config
Using 736 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname POTCH-R1
!
!
!
enable secret 5 $1$mERr$RldxcCZEZsTFTETUyRaA50
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
--More--
```

SWITCH 3560: POTCH-S1

show running-config

```
POTCH-S1
Password:
POTCH-S1#show running-config
Building configuration...

Current configuration : 1272 bytes
!
version 12.2(37)SE1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname POTCH-S1
!
!
no profinet
enable secret 5 $1$mERr$RldxcCZEZsTFTETUyRaA50
!
!
```

show startup-config

```
POTCH-S1
POTCH-S1#
POTCH-S1#show startup-config
Using 1272 bytes
!
version 12.2(37)SE1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname POTCH-S1
!
!
no profinet
enable secret 5 $1$mERr$RldxcCZEZsTFTETUyRaA50
!
!
!
!
!
```

```
show running-config
```

```
show startup-config
```

```
POTCH-R2#
POTCH-R2#show startup-config
Using 774 bytes
!
version 16.6.4
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname POTCH-R2
!
!
!
!
enable secret 5 $1$mERr$RldxcCZEEZsTfTETUyRaA50
!
!
!
!
!
!
in conf
```

Assessment Rubric (10 Marks) Criteria	Marks
Console connectivity	2
IOS navigation	3
Device configuration	3
Save and verify configuration	2
Total	10