

PRACTICAL 5: CISCO DEVICE ACCESS AND BASIC CONFIGURATION

Objective


Access Cisco IOS and perform basic device configuration.

Equipment

- Console Cables
- Cisco 1941 Router
- Cisco ISR4331 Router
- Cisco Catalyst 3560 Switch

Activities

1. Access Cisco devices using console cables.

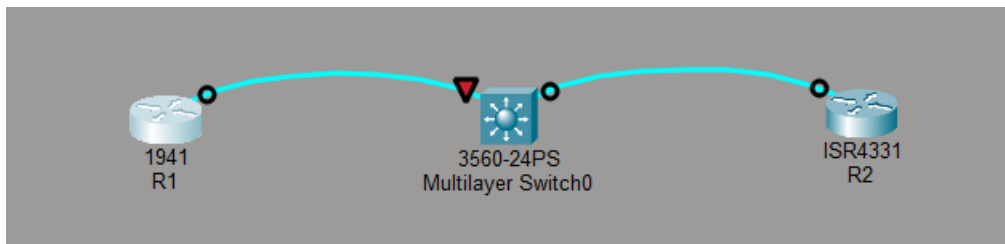

2. Configure hostname.

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#
```

Figure 1: R1 hostname

```
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname S1
S1(config)#
```

Figure 2: S1 hostname

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R2
R2(config)#
```

Figure 3: R2 hostname

3. Configure passwords.

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#enable secret class
R1(config)#line console 0
R1(config-line)#password cisco
R1(config-line)#login
R1(config-line)#exit
R1(config)#line vty 0 4
R1(config-line)#password cisco
R1(config-line)#login
R1(config-line)#exit
R1(config)#
```

Figure 4: R1 password config

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R2
R2(config)#enable secret class
R2(config)#line console 0
R2(config-line)#password cis
R2(config-line)#password cisco
R2(config-line)#login
R2(config-line)#exit
R2(config)#vty 0 4
      ^
% Invalid input detected at '^' marker.

R2(config)#line vty 0 4
R2(config-line)#password cisco
R2(config-line)#login
R2(config-line)#exit
R2(config)#
```

Figure 5: R2 password config

```
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname S1
S1(config)#enable secret class
S1(config)#line console 0
S1(config-line)#password cisco
S1(config-line)#login
S1(config-line)#exit
S1(config)#line vty 0 4
S1(config-line)#password cisco
S1(config-line)#login
S1(config-line)#exit
S1(config)#
```

Figure 6: S1 password config

4. Configure login banner.

```
R1#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#banner motd WARNING: AUTHORIZED ACCESS ONLY!
Enter TEXT message. End with the character 'W'.
```

Figure 7: R1

```
S1(config)#banner motd WARNING: AUTHORIZED ACCESS ONLY
Enter TEXT message. End with the character 'W'.
WARNING: AUTHORIZED ACCESS PROHIBITED

S1(config)#
```

Figure 8: S1

5. Save configurations.

```
S1#copy running-config
% Incomplete command.
S1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
S1#
```

Figure 9: S1 running config startup-config

Deliverable

Configuration screenshots and configuration file.

Assessment	Marks
Rubric (10 Marks)	
Criteria	
Console connectivity	2
IOS navigation	3
Device configuration	3
Save and verify configuration	2
Total	10