DESIGN SYSTEM

Zr3i

Colour, type, shape, components and UX rules for the Zr3i platform. English and Arabic.

Brand book

Zr3i is a multi-tenant agricultural risk-intelligence platform. Its modules today are Verification (declared against measured, per parcel) and Risk (CRI per parcel, FRI per farm). The interface states measured facts, shows the evidence and maturity behind each figure, and never advises. Build every screen, report and email from these rules.

Identity

- Name the product **Zr3i** in running text and set the wordmark as **ZR3I**: Roboto Black caps, very large, white on `zr-sage`, with a short `zr-ember` rule (128 by 4px) beneath it. Above it goes a letter-spaced bold eyebrow in `zr-navy`: "AGRICULTURAL RISK INTELLIGENCE" for the platform, with modules named under it ("Verification", "Risk"). The legal entity, "DigiWell for Digital Solutions LLC (trading as Zr3i)", appears only in contracts, report footers and the about page.
- The look is the Zr3i Overview Deck: a flat `zr-sage` field, flat `zr-field` (deep field green) blocks with `zr-amber` bold upper-case headings and white text, a thin `zr-ember` rule, generous left-aligned margins, a small footer line and a two-digit page number. Corners are softly rounded; nothing is shadowed or gradient.
- DigiWell is an endorsement, not a second brand: "a DigiWell product" in 12px at the foot of the login panel and report footers. No DigiWell logo or colour has been supplied, so none is used.
- Zr3i is a multi-tenant platform. Tenants may add a logo and one accent colour that fills named slots only; status colours, risk bands, banners, maturity badges and the Zr3i footer are never overridden.
- The product speaks in the third person about data and in the second person to the user: "Measured area is 7.3 feddan against 10.0 declared." Never "we think", "looks good" or "high risk".

Colour

Use tokens, never raw hex. There are two themes, `light` (default) and `dark`; set `data-theme` on the root element.

Job	Light	Dark	Use
Page	`ground`	`ground`	behind cards
Card, table, form, report page	`surface`	`surface`	holds text
Inset wells, table headers, hash blocks	`sunken`	`sunken`	quiet fill
Text	`ink`, `ink-muted`	`ink`, `ink-muted`	6:1 or better on every ground
Primary action, active marker	`brand` with `on-brand` text	same tokens	one per view

Job	Light	Dark	Use
Links	`link`	`link`	inline and text buttons
Control borders	`line-strong`	`line-strong`	3:1 or better
Hairlines	`line`	`line`	decoration only
Focus ring	`focus`	`focus`	2px solid, 2px offset

- **Risk bands** A to E (`band-a` to `band-e`, letters in `on-band-*`) belong to the risk module only. Draw each as a square chip with the large letter and the word (A lowest risk, E highest); never as a bare colour, never in verdict tables, never beside a status pill without the module label.
- **Maturity badge** (`maturity-bg`, `maturity-ink`) marks every index as specified, calibrated or validated, in upper-case Roboto. It cannot be hidden.
- **Identity fields** use the fixed `zr-*` colours in both themes: `zr-sage` for the login panel and report covers with `zr-navy` text; `zr-field` for the sidebar and dark panels with `zr-mist` or white text; `zr-amber` only for small labels on `zr-navy` or `zr-forest`; `zr-ember` only as a hairline rule or a large mark, never text (3.5:1 on white).
- **Status** uses four paired tokens: `confirmed`, `flagged`, `pending`, `not-assessable`, each with a `-bg` fill. Every status shows an icon and a word as well as colour (see `StatusPill`). `flagged` is a burnt orange and `pending` a blue so none of the four depends on a red-green difference.
- **Amber as text** is `accent-ink` (a brown in light, a gold in dark), for the eyebrow and the synthetic-data notice.
- **Imagery overlays** use `img-boundary` (declared) and `img-measured` (measured, dashed), always with a navy halo. NDVI uses `img-ndvi-low`, `img-ndvi-mid`, `img-ndvi-high` plus a legend.
- This is an agriculture product, so green carries the identity: `zr-field` for blocks, sidebar and primary buttons. `zr-navy` is the text colour only. Text on `zr-sage` is `zr-navy` (7.7:1). White on sage is about 2:1: use it only for the very large wordmark, never for words people must read.

Type

Latin and Arabic are one system.

Role	Latin	Arabic	Styles
Wordmark, headings, labels, buttons	Roboto (700 and 900)	Cairo (600 and 700)	`display-xl`, `display-lg`, `display-md`, `label`, `button`; `ar-display`, `ar-label`
Body and interface text	Lato (400 and 700)	Noto Sans Arabic (400 and 600)	`title`, `body`, `body-sm`; `ar-title`, `ar-body`, `ar-small`
Data, ids, hashes	Roboto Mono	Roboto Mono (Western digits)	`data`, `hash`

- Wire families by token: `--font-display`, `--font-sans`, `--font-mono`, `--font-arabic`, `--font-arabic-display`. The `sans` and `display` stacks list the Arabic face second, so mixed

text falls back correctly without markup.
- All faces are free Google Fonts and load from Google Fonts; no font binary is stored here. Embed the same faces in PDFs.
- Eyebrows and block headings are Roboto Bold, upper case, letter-spaced 0.14em to 0.3em (`label`). Arabic has no upper case: use `ar-label` with `letter-spacing: 0`.
- Body is 15px on 24px leading; Arabic body is 16px on 28px. Use `ar-*` styles on any element whose `dir` is `rtl`.
- Numbers, parcel ids (`P-0147`), dates and hashes use Western digits and stay left-to-right in both languages, wrapped in `dir="ltr"`. This is a product decision that can be revisited with Arabic-reading customers.
- No more than two weights per screen apart from the wordmark.

Space, shape and depth

- Spacing is a 4px scale: `space-1` 4, `space-2` 8, `space-3` 12, `space-4` 16, `space-5` 24, `space-6` 32, `space-7` 48, `space-8` 64. Cards pad `space-4`; screens pad `space-6` on desktop and `space-4` on phones.
- Corners are soft, never sharp and never bubbly: `radius-sm` 6px (pills, tags, band chips), `radius-md` 10px (buttons, inputs, banners), `radius-lg` 14px (cards, blocks, tables, modals), `radius-pill` for filter chips, `radius-dot` for status circles and map dots. Full-bleed edges stay square: the sidebar, the top bar and report pages.
- Content blocks are flat: a `zr-field` block with white text and an amber heading, or a `surface` block with a 1px `line` hairline. `shadow-pop` is for menus and tooltips only.
- Content width is capped at `content-max` (1200px). Report pages are A4, `page-a4-w` 794px wide, with 18mm margins.
- Interactive targets are at least `tap-min` (44px) in both axes.

Iconography

- Icons are 16px or 20px outline glyphs with a 1.5px stroke, drawn on a 24px grid, in `ink`, `ink-muted` or a status token. Use Lucide square-cap outline icons for the interface set; state this choice in code, do not redraw its icons.
- The four status icons are fixed and are not Lucide: filled circle (confirmed), triangle (flagged), half circle (pending), dashed circle (not assessable). They are the only icons that carry meaning on their own and they always sit next to a word.
- Do not use emoji, illustrated characters, gradients or decorative leaf marks in the product.

Content

- Write short, factual sentences in sentence case. Say what was measured, with the unit and the noise. Examples to copy: "Measured area is 7.3 feddan against 10.0 declared." "Gap 27%, outside the ±4.6% measurement noise." "34 parcels withheld by consent."
- Words that never appear in the product: approve, reject, recommend, score, rating, risk (in R0), safe, good, bad, passed, failed. A parcel is Confirmed, Flagged, Pending or Not assessable.

- "Below resolution" means the parcel is too small to test at 10 m; say so, and never write "no crop" for it.
- Show **Accuracy: NOT_ESTABLISHED** wherever a figure rests on a measurement whose hit rate has not been established. Show **ILLUSTRATIVE · SYNTHETIC DATA** on every page of a synthetic namespace.
- Dates are `YYYY-MM-DD` with a time offset when time matters. Area is in feddan with the unit in the column header.

English	Arabic
Confirmed	مؤكَّدة
Flagged	مُعلَّمة
Pending	قيد الانتظار
Not assessable	غير قابلة للتقييم
Below resolution	أقل من دقة الصورة
Measurement noise	هامش القياس
Declared	المُعلنة
Measured	المقيسة
Hit rate	نسبة الإصابة
Synthetic data	بيانات اصطناعية
Pilot	المشروع التجريبي
Parcel	قطعة
Feddan	فدان

The Arabic terms are a first draft and must be reviewed by a native speaker before any customer sees them.

UX guide

UI/UX guide

Who uses the platform

The platform is multi-tenant and expandable. It ships with five built-in account types (Zr3i admin, Bank, Insurance, Company, Farmer; see Account types at the end of this guide). Each type is a preset on one engine: an organisation is a tenant, people join it through memberships, and what they see is decided by their roles, their scope and the modules their tenant has switched on. A new type is a new preset, not a new code path.

Concept	Rule for screens
Organisation	The tenant. Name and optional logo in the header; the module list sets the navigation.
Membership and role	A user can belong to several organisations; a switcher in the header changes the organisation, never mixes data. Navigation lists only what the roles allow. Nothing is greyed out for lack of permission.
Scope	A membership can be limited to portfolios or farms. Scoped users see only those, and counts reflect only those.
Grant	One organisation lets another read defined data for a purpose and a period. Every screen that shows granted data names the grantor and the expiry.
Module	Verification (R0) and Risk (CRI, FRI) today. A module adds navigation items, screens and report templates.

Built-in role templates (copyable per tenant): organisation admin, analyst, viewer, field user. Zr3i staff are the provider organisation: Zr3i admin and Zr3i analyst. Farmers have accounts, either direct or managed by a company or authority such as AgriCash, and can also give consent through a one-page link from their agronomist.

Entering the platform

1. **Sign in**: email and password, then a six-digit one-time code (`AuthCard`, `Field`). Five failed attempts lock the account for 15 minutes and email the user.
2. **Request access**: for a new account of any type except Zr3i staff (invitation only). The first choice is the account type: Company, Bank, Insurance or Farmer. Fields: organisation or farm name, commercial register number (mobile number for a farmer), work email, contact name, purpose in one sentence, and for a farmer the company or authority that invited them (optional). The confirmation says exactly what happens next: a Zr3i administrator reviews it, usually within two working days, and sends an invitation.
3. **Accept invitation**: set a password, enrol an authenticator app, choose the language. The chosen language is kept for the account and the reports it generates.

4. **Farmers** can create a direct account or be invited by a company or authority. A farmer who has no account can still open a single-use link from their agronomist, read a one-page consent in their language, and tick it.

Never add social sign-in, a "remember me" for over 12 hours, or a public sign-up.

Screen inventory

Screen	Role	What it holds
Sign in	all	credentials, code, language toggle
Request access	visitor	the request form and a confirmation
Portfolio	any role with portfolio access	tiles and a map by region, crop or state; counts and risk band distribution; drill down to farms
Farm	any role with farm access	farm risk index with maturity badge, parcel list with bands and verdicts, farm-level facts, map
Parcel risk	any role with risk access	CRI, band, the seven components, missing components, percentile against the reference, method version
Methodology	all	index definitions, maturity status, what the index is not
Bulk import	analyst, org admin	upload, validation report, commit
Parcels	analyst, admin	filters, search, table, selected-parcel panel, namespace bar
Parcel evidence	analyst, customer, lender	declared versus measured, findings, imagery, photos, history
Imagery viewer	analyst, customer, lender, agronomist	satellite chip with overlays, layers, date slider; field photos
Data analysis	analyst, customer	readable share by size class, verdict mix, parcels over time, filters, export
Accuracy	analyst	hit rate by size class with intervals, kill line, controls
My book	customer	uploaded lists, results per list, reports
Tranches	lender	tranche counts, withheld by consent, parcel table, frozen report
Reports	analyst, customer, lender	frozen reports in English and Arabic, hash, download
Users and roles	organisation admin	invite, change roles and scope, deactivate, grants
Organisations	Zr3i admin	tenants, enabled modules, capability flags
Audit log	admin	append-only events, filter, export
Walk sheet	agronomist	assigned parcels in order, photo and boundary status
Consent	farmer	requester, purpose, data shared, duration, give or withdraw

Screen	Role	What it holds
Farmer home	farmer	my farms, my parcels with declared and measured area, who can see my data, Withdraw buttons; a banner when a company or authority manages the records
Farmers	company	invite, import, consent state per farmer (invited, pending, given)
Event evidence	insurance	what the satellite record shows inside an event window, per parcel, with withheld counts
Account types	Zr3i admin	the five types, how they relate, what each can do

Screen patterns

- **Desktop shell**: `Navigation` sidebar at the start edge, a header with the namespace bar, role switcher, language toggle and account menu, then one content area. Put the synthetic-data banner directly under the header.
- **List and detail**: a `Table` on the left and a selected-object panel on the end side (at least 360px). The panel never shows an action that decides the outcome.
- **Evidence page**: top to bottom: parcel id and `StatusPill`; declared versus measured with the noise; findings, each with its own pill; imagery (`ImageryViewer`); photos (`PhotoCard`); method and provenance; hashes. Anything a finding rests on is one click away.
- **Phones** (agronomist, farmer): one column, 390px reference width, 44px targets, the primary action fixed at the bottom, no tables (use stacked rows).
- **Empty states** say what is missing and why in one sentence ("No parcels in this tranche are readable yet"), never a cheerful illustration.

Data analysis

- Lead with the count and the verdict mix (`VerdictBar`), then the readable share **by size class**; never pool classes into one rate.
- Show `IntervalChart` for hit rate with the kill line (70%) and target (80%). A class with no control set says "Not established".
- Every number has its unit and denominator ("17 of 135 readable parcels"); every chart has a text table beneath or behind a "View as table" button.
- Filters: namespace, tranche, size class, state, date range. Filters appear above the data and persist in the URL.
- Export gives CSV and the frozen PDF; both carry the report hash and the accuracy status. Do not offer a score, ranking or "top risk" view.

Imagery and photos

- Satellite imagery is Sentinel-2 L2A at 10 m. A parcel smaller than about 8 whole pixels inside a 5 m buffer is **below resolution**; show the chip anyway and say why it cannot be assessed.
- Always show the declared boundary, the measured footprint and the pixel grid together, with date, sensor and cloud percentage as text.

- The date slider steps through usable scenes only; scenes lost to cloud or shadow appear as disabled ticks with the reason on focus.
- Real field photos carry timestamp, GPS and accuracy, agronomist id and a SHA-256 (`PhotoCard`). They are immutable and compared to the boundary, not to the verdict.
- Imagery in the design files is a labelled placeholder. Replace it with real chips and photos; do not use stock imagery in the product.

Bilingual and right-to-left

- Every screen and report exists in English and Arabic. The user's language sets `lang` and `dir` on the root element; layouts use logical properties (`margin-inline-start`, `padding-inline-end`, `inset-inline-start`, `text-align: start`) so nothing is mirrored by hand.
- Mirror: navigation order, table column order, progress and back arrows, the side panel. Do not mirror: charts and time axes, play controls, ids, numbers, hashes, code and the status icons.
- Reports are generated in one language per document; each frozen report is rendered in both languages from the same data, with the same hash.
- Test every screen with the longest Arabic strings and with a mixed line (Arabic sentence containing `P-0147` and `7.3`).

Accessibility

- WCAG 2.2 AA: 4.5:1 body text, 3:1 for large text, borders, focus rings and icons that carry meaning. Both themes are checked.
- Keyboard: every control reachable in reading order, visible `focus` ring, no keyboard trap in the imagery viewer; arrow keys move the date slider.
- Never use colour alone: every state has an icon and a word; charts have a text alternative and a table view.
- Respect `prefers-reduced-motion`; the product uses no animation beyond 150ms fades.
- Reports print at 12pt or larger in body and remain readable in greyscale.

Risk screens

- An index is shown as a `RiskBand` chip (letter, word, percentile), the `MaturityBadge`, and the method version. Never show the number or the chip without them.
- The seven components are shown as bars with their own value and weight. Components that could not be established are listed, not hidden, and the index says it was renormalised.
- Parcels excluded by the validity floor are listed with the reason.
- Copy says "production-risk percentile", never score, rating, default probability or approval. The first line of every risk screen states: "Specified, not calibrated against harvest outcomes."
- Large portfolios: show distribution first (a band histogram), then a sortable table. No ranking of individuals and no "top risk" view.

Rules the interface must keep

1. No approve, reject or recommend control, label or colour. Facts only.
2. Below resolution is never shown as "no crop".
3. The accuracy status is visible wherever a measurement-derived figure is shown.
4. Consent gates every read: withheld parcels are counted as withheld, never listed and never included in totals.
5. Synthetic namespaces are bannered on every page and watermarked in every report.
6. Risk bands appear only in the risk module, always with the letter, the word and the maturity badge.
7. Frozen reports cannot be edited; a change is a new report with a new hash.

Account types

Five built-in account types share one multi-tenant platform. A type is a preset of roles, navigation, modules and views, not a separate code path.

Type	Model	Home view	Navigation
Zr3i admin	Provider	Tenants and account types	Tenants, Account types, Methods
Bank	B2B lender	Tranche check, portfolio risk	Tranches, Reports
Insurance	B2B insurer	Event evidence, portfolio risk	Portfolio, Event evidence, Risk, Methodology
Company	B2B tenant, or an authority such as AgriCash	Portfolio	Portfolio, Farms, Farmers, Risk, Imports, Methodology
Farmer	B2B and B2B2C	My farms	My farms, Consent, Reports

- The role label in the top bar names the account type, for example "Company · analyst".
- Sign-up asks for the account type first. Zr3i staff accounts are invitation only.
- A farmer can have a direct account or be managed by a company or authority. A managed farmer still controls consent; the Farmer view shows a banner naming the authority.
- Banks and insurers read another tenant's data only through a grant with a purpose and a period. The farmer view lists every grant with a Withdraw button.
- Farmer pages use plain words, larger text and the same status shapes. "Not assessable" is always explained as "image too coarse", never as "no crop".

Tokens

Colour

Swatch	Token	Light / dark	Use
	zr-navy	`#131e29`	Zr3i ink. Text colour and the dark theme surface. Not used for large blocks or the sidebar; green carries those.
	zr-field	`#17472d`	Zr3i deep field green, the main brand colour. Sidebar, content blocks, table headers, login and report blocks, primary button fill. Text on it is white, mist, amber or sage (4.8:1 or more).
	zr-forest	`#133c36`	Zr3i deep forest, an older darker green kept for compatibility. New work uses zr-field.
	zr-sage	`#82baa9`	Zr3i sage, the identity field. Large brand panels and the primary action in the dark theme; text on it is zr-navy, never white.
	zr-mist	`#dae9e4`	Zr3i mist. Soft panels, selected rows, report page tint; text on it is ink or zr-forest.
	zr-amber	`#dcab4d`	Zr3i amber, the label accent on dark fields. Never body text on light grounds; use accent-ink there.
	zr-ember	`#cf6c43`	Zr3i orange rule. Hairline rules and large marks only (3.5:1 on white); never text, never a verdict colour.
	ground	`#f3f8f6` / `#0b141b`	Page background behind cards.
	surface	`#ffffff` / `#131e29`	Cards, tables, forms and report pages. Text on it is ink, ink-muted or a status colour.
	sunken	`#e6f0ec` / `#0e1822`	Table headers, inset wells, image frames, code and hash blocks.
	ink	`#131e29` / `#e8f1ee`	Body and heading text on ground, surface and sunken.
	ink-muted	`#4a5b66` / `#a7bbb6`	Secondary text, captions and axis labels on ground, surface and sunken. 6.0:1 or better.
	line	`#c9d9d3` / `#263845`	Decorative hairlines and table row dividers. Carries no meaning; do not use for control borders.
	line-strong	`#6b857d` / `#5c7a72`	Borders of inputs, buttons, checkboxes and chart axes. 3:1 or better on surface and ground.

	**brand**	`#17472d` / `#7bbaa7`	Primary fill, active nav marker and the wordmark. Text on a brand fill uses on-brand.
	**brand-hover**	`#0c2d28` / `#97ccbc`	Hover and pressed state of a brand fill.
	**on-brand**	`#ffffff` / `#0b141b`	Text and icons on a brand fill. 12:1 light, 8:1 dark.
	**link**	`#0f5c4f` / `#8fd0bc`	Inline links and text buttons on ground and surface.
	**focus**	`#1b6e8f` / `#74c2e0`	Focus ring, 2px solid with a 2px offset. On a zr-sage panel use zr-navy instead.
	**accent-ink**	`#6e4a00` / `#e9b552`	Amber used as text: eyebrow labels and the synthetic-data notice on ground and surface.
	**synthetic-bg**	`#fff1cf` / `#33290f`	Fill of the SYNTHETIC DATA banner and watermark ground. Text on it is accent-ink.
	**confirmed**	`#14604a` / `#6fcba6`	CONFIRMED verdict: text and icon (filled circle) on surface and confirmed-bg.
	**confirmed-bg**	`#ddf0e8` / `#12332b`	Fill behind a CONFIRMED pill or row tint.
	**flagged**	`#9a3a12` / `#f0905e`	FLAGGED verdict: text and icon (triangle). A fact that needs a person to look, not a rejection.
	**flagged-bg**	`#fbe6da` / `#3a2012`	Fill behind a FLAGGED pill or row tint.
	**pending**	`#2f5a8c` / `#8db6e8`	pending_second_pass and no_usable_pass: text and icon (half circle). Blue so it never reads as green or red.
	**pending-bg**	`#e0eaf6` / `#16283f`	Fill behind a pending pill or row tint.
	**not-assessable**	`#55646e` / `#a9b8c0`	NOT_ASSESSABLE and below-resolution: text and icon (dashed circle). Grey means the test could not run; it is not a 'no crop' result.
	**not-assessable-bg**	`#e8ecee` / `#1f2d36`	Fill behind a NOT_ASSESSABLE pill or row tint.

	img-true	#6f7d4a	Placeholder tone for true-colour chips only. Replace with the real scene.
	img-ndvi-low	#c9a45c	NDVI ramp low end (bare soil, below 0.25). Always paired with the legend.
	img-ndvi-mid	#9cbf6a	NDVI ramp middle (0.25 to 0.6).
	img-ndvi-high	#2f7a4a	NDVI ramp high end (above 0.6).
	img-boundary	#ffd23f	Declared boundary outline drawn over imagery. 2px, with a navy halo so it reads on light and dark scenes.
	img-measured	#3fd0ff	Measured (pixel-test) footprint outline over imagery. Always differs from the declared outline in shape: dashed.
	band-a	#2e8b8b	Risk band A (lowest risk) fill. Always a square chip with the letter A and the word; letter set 24px bold in on-band-a.
	on-band-a	#ffffff	Letter on band A. 4.05:1, allowed at 24px bold.
	band-b	#7baf6b	Risk band B fill, chip with the letter B and the word.
	on-band-b	#131e29	Letter on band B (6.6:1).
	band-c	#e0a93a	Risk band C fill, chip with the letter C and the word.
	on-band-c	#131e29	Letter on band C (8:1).
	band-d	#d9693a	Risk band D fill, chip with the letter D and the word.
	on-band-d	#131e29	Letter on band D (4.8:1).
	band-e	#a83a32	Risk band E (highest risk) fill, chip with the letter E and the word.
	on-band-e	#ffffff	Letter on band E (6.3:1).
	maturity-bg	#ece7f3 / #2a2236	Fill of the maturity badge (specified, calibrated, validated) on risk screens.
	maturity-ink	#4b3a73 / #c9b9ee	Maturity badge text and border on maturity-bg. 7:1 light, 8:1 dark.

Type styles

Display

Parcel verification, 202 parcels

`display-xl · 40px/46px · 700 — Report cover title and login hero. One per page.`

Tranche TR-02

display-lg · 28px/34px · 600 — Screen titles and report section openers.

Parcel P-0147

display-md · 22px/28px · 600 — Panel titles and evidence-page headings.

Text

Declared versus measured area

title · 18px/26px · 600 — Card and table titles.

Measured area is 7.3 feddan against 10.0 declared.

body · 15px/24px · 400 — Default UI and report text.

Area noise at this size is about 4.6%.

body-sm · 13px/20px · 400 — Table cells, helper text and report footnotes.

DECLARED WINDOW

label · 12px/16px · 600 — Eyebrows and field labels, upper case in English only. Arabic uses ar-label.

Sign in

button · 14px/20px · 600 — Button text.

Data

P-0147 7.3 fd ±4.6%

data · 13px/20px · 400 — Parcel ids, areas, dates and counts in tables. Always left-to-right.

sha256 9f2c4e1ab07d

hash · 11px/16px · 400 — Report hashes and evidence ids.

Arabic

التحقق من القطع، ٢٠٢ قطعة

ar-display · 32px/48px · 700 — Arabic counterpart of display-xl and display-lg, in Cairo Bold.

المساحة المُعلنة مقابل المقيسة

ar-title · 19px/32px · 600 — Arabic counterpart of title.

المساحة المقيسة ٧٫٣ فدان مقابل ١٠٫٠ مُعلنة.

ar-body · 16px/28px · 400 — Arabic body. One size step above Latin, taller leading.

هامش القياس عند هذا الحجم نحو ٤٫٦٪.

ar-small · 14px/24px · 400 — Arabic table cells and footnotes.

النافذة المُعلنة

ar-label · 13px/20px · 600 — Arabic eyebrows and field labels. No upper-casing, no letter-spacing.

Spacing

Token	Value	Use
space-1	4px	Icon-to-text gap, pill padding.
space-2	8px	Control inner gap, table cell vertical padding.
space-3	12px	Field gap, compact card padding.
space-4	16px	Default card padding and page gutter on phones.
space-5	24px	Card gap and section gap inside a screen.
space-6	32px	Page padding on desktop.
space-7	48px	Gap between report sections.
space-8	64px	Login hero padding.

Radius

Token	Value	Use
radius-sm	6px	Soft small corners: status pills, tags, risk band chips, maturity badge, checkboxes.
radius-md	10px	Buttons, inputs, banners, menus, image frames.
radius-lg	14px	Cards, content blocks, tables, login card, modals.
radius-pill	999px	Filter chips and the language toggle.
radius-dot	50%	Status circles and map dots. Full circles only.



radius-sm 6px radius-md 10px radius-lg 14px radius-pill 999px radius-dot 50%

Shadow

Token	Value	Use
shadow-pop	0 6px 20px rgba(17,29,41,0.16)	Menus, popovers and the date-slider tooltip. Cards use a hairline, not a shadow.


shadow-card	`0 1px 2px rgba(17,29,41,0.08)`	Only on the login card over a photographic field.

Size

Token	Value	Use
tap-min	`44px`	Minimum height and width of any interactive target.
sidebar-w	`240px`	Operator and customer sidebar.
content-max	`1200px`	Maximum content width of a desktop screen.
page-a4-w	`794px`	Report page width at 96 dpi (A4).
phone-w	`390px`	Reference width for the agronomist and farmer screens.

Components

AuthCard

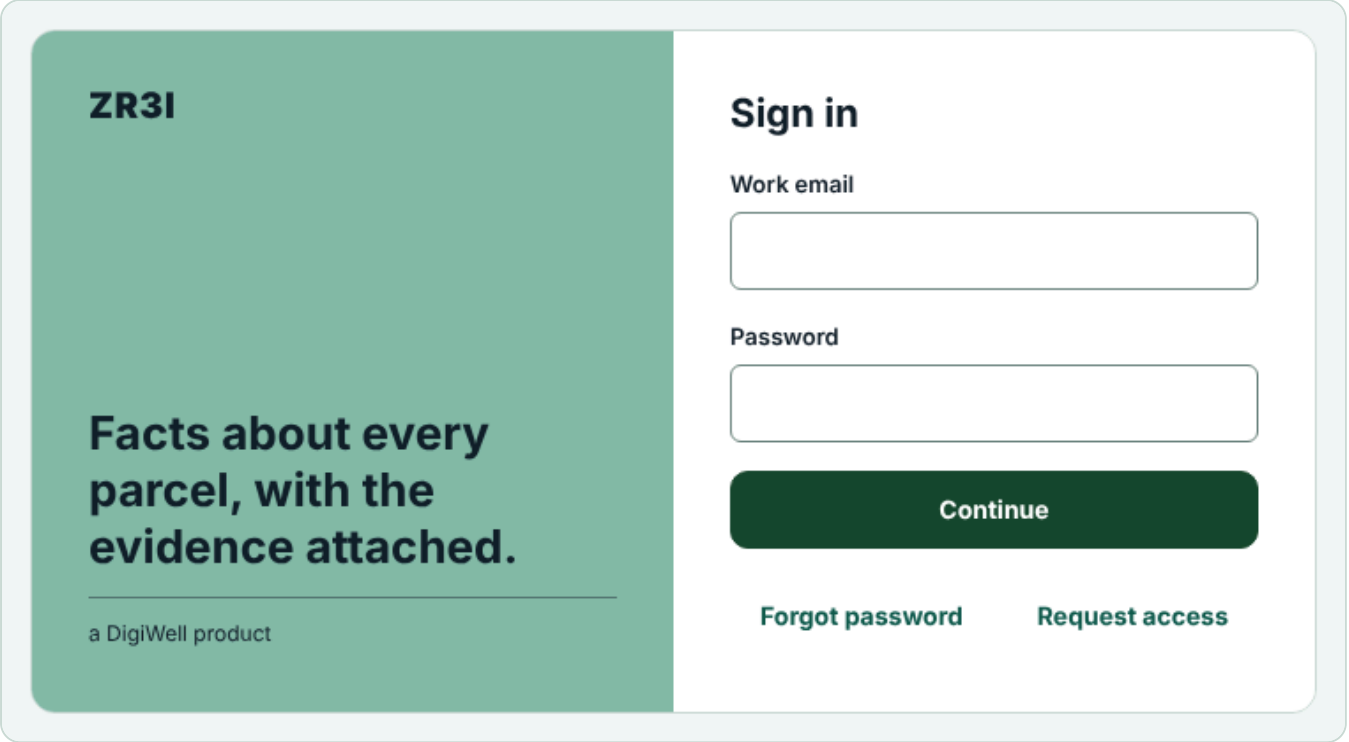


Sign-in is two steps on a single card: email and password, then a six-digit one-time code. The left panel is the `zr-sage` identity field with `zr-navy` text; the form side is `surface`. On phones the identity panel collapses to a top strip.

Sign-up is by account type. A visitor chooses Request access, picks the account type (Company, Bank, Insurance or Farmer) and gives the fields that type needs (for example organisation, commercial register number and work email; a farmer gives name, mobile number and, if managed, the managing company); Zr3i staff approve it and the invitation arrives by email. Zr3i admin accounts are created only by invitation. Error messages never say which of email or password was wrong.

The language toggle sits at the top end of the page and the DigiWell endorsement stays small at the bottom of the identity panel. Do not add social sign-in.

Banner

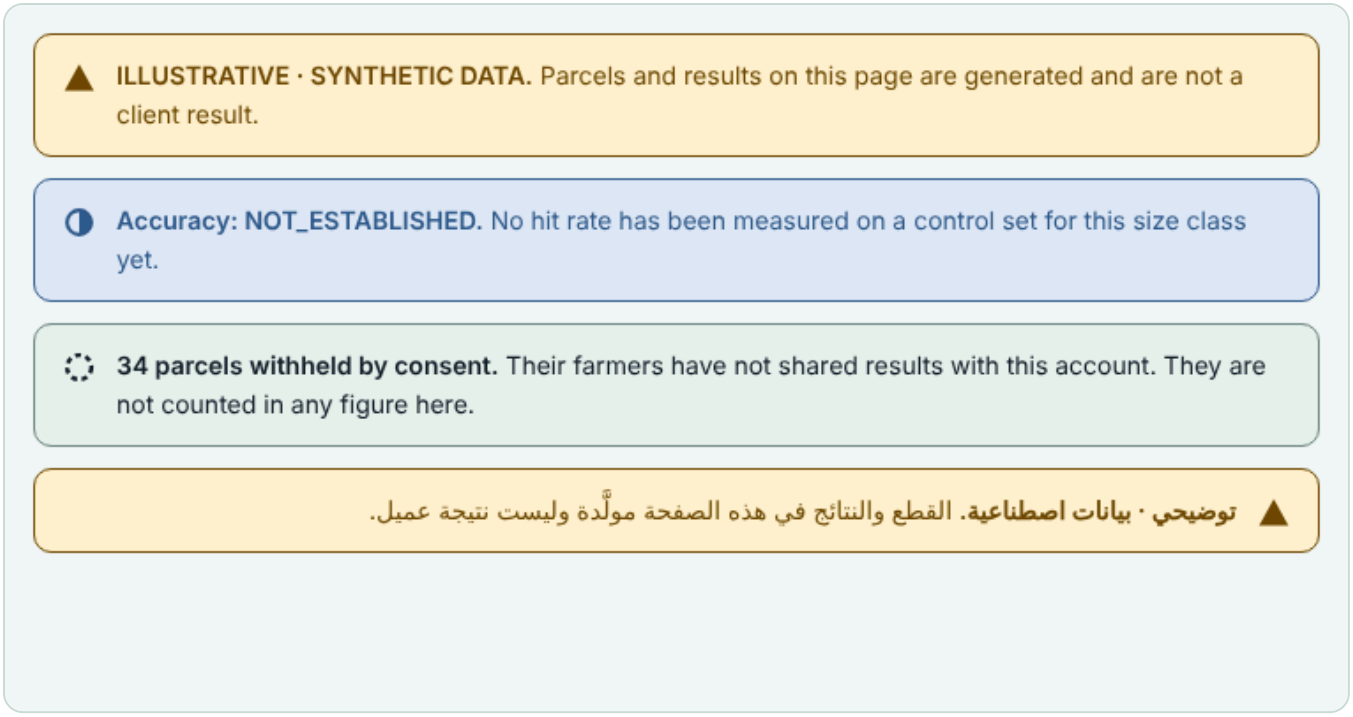

Banners state a condition of the data, not a mood. Three are mandatory where they apply: synthetic data (every page in a synthetic namespace, in both languages, with a matching page watermark in reports), accuracy status (shown whenever any figure derives from a measurement and its hit rate is NOT_ESTABLISHED or below the kill line) and withheld by consent (shown with a count, never hidden).

Each banner has an icon, a bold lead phrase and one sentence. They use the status `-bg` tokens with matching text; the synthetic banner uses `synthetic-bg` and `accent-ink`.

Banners are not dismissible. They do not use exclamation marks or the words Warning, Error or Critical.

Button




Use `primary` once per view for the action that moves the work forward (Sign in, Freeze report, Save consent). Use the outlined button for everything else and `text` for navigation-like actions.

Provide a verb label of one to three words and the same label in Arabic. Height is `tap-min` (44px), padding `space-4`, radius `radius-md`, text style `button`.

A disabled button stays visible with `ink-muted` on `sunken` and a border, and the reason goes in a hint beside it (for example "Report is frozen after review"). Never hide an unavailable action.

There is no Approve, Reject or Recommend button anywhere in Zr3i. The product states facts; a person decides.


ContentBlock

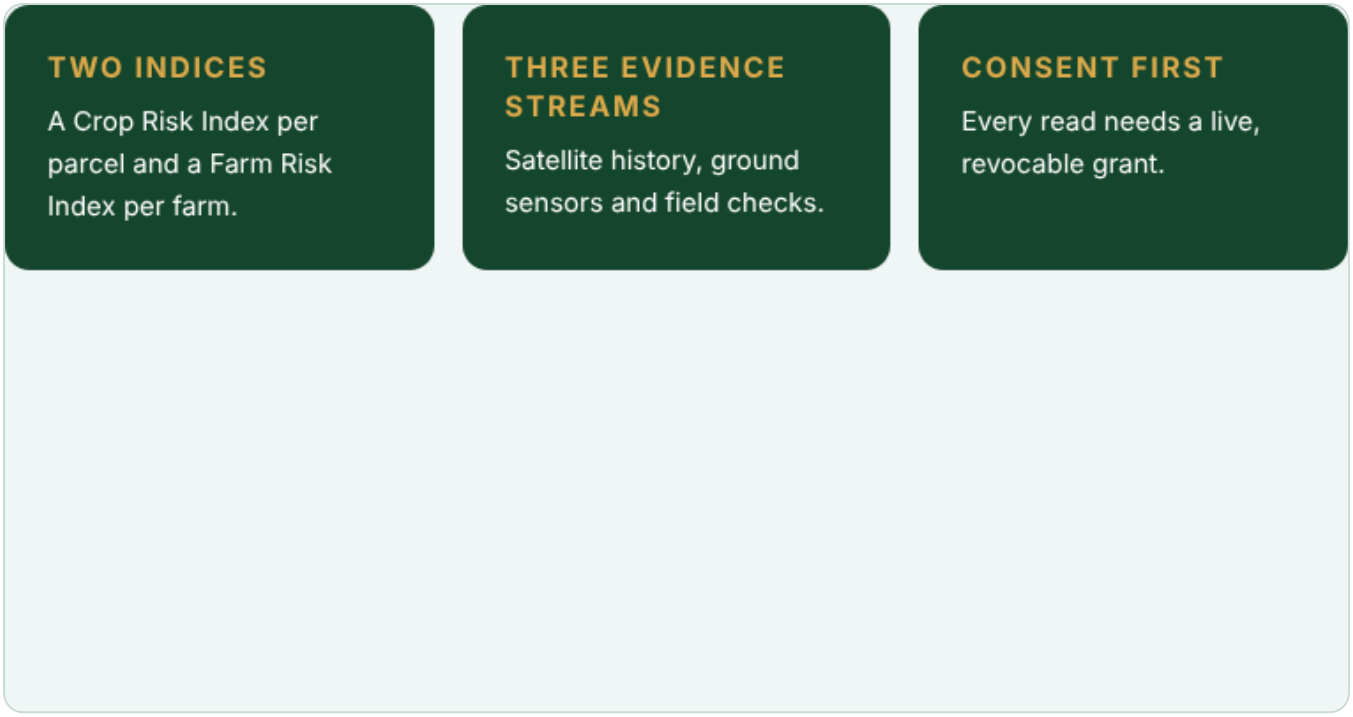

A content block is a `zr-field` green block with `radius-lg` corners with white text and a bold upper-case `zr-amber` heading (Roboto, 0.1em tracking). Blocks sit in a row of two to four on a `zr-sage` or `ground` field, with `space-4` between them and `space-5` padding. No border or shadow.

Use blocks for statements and summaries (login panel, report cover, portfolio headline figures). Do not put tables or forms inside a block. Arabic headings use Cairo with no upper-casing.

Cover

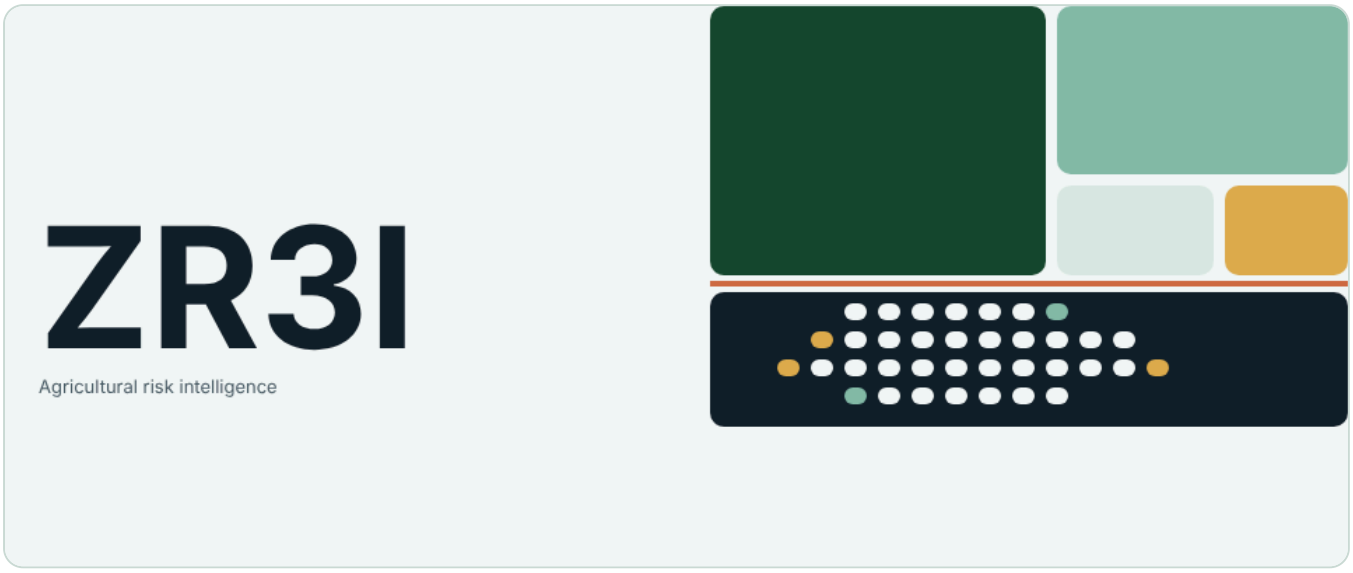

Field




Every field has a visible label above it, a hint line below it and an error line that starts with a triangle icon and a plain sentence ("Password or email is not recognised"). Colour alone never signals an error.

Inputs are `tap-min` tall with a `line-strong` border (3:1 or better) and a 2px `focus` ring on keyboard focus. Email, ids, numbers, hashes and one-time codes are always `ltr` and left-aligned, inside Arabic pages too; their labels and hints follow the page direction.

The one-time code is six separate boxes in left-to-right order, with autofill and paste support.

Consent checkboxes are never pre-ticked. The label states who receives what and for how long, in the farmer's language.

ImageryViewer

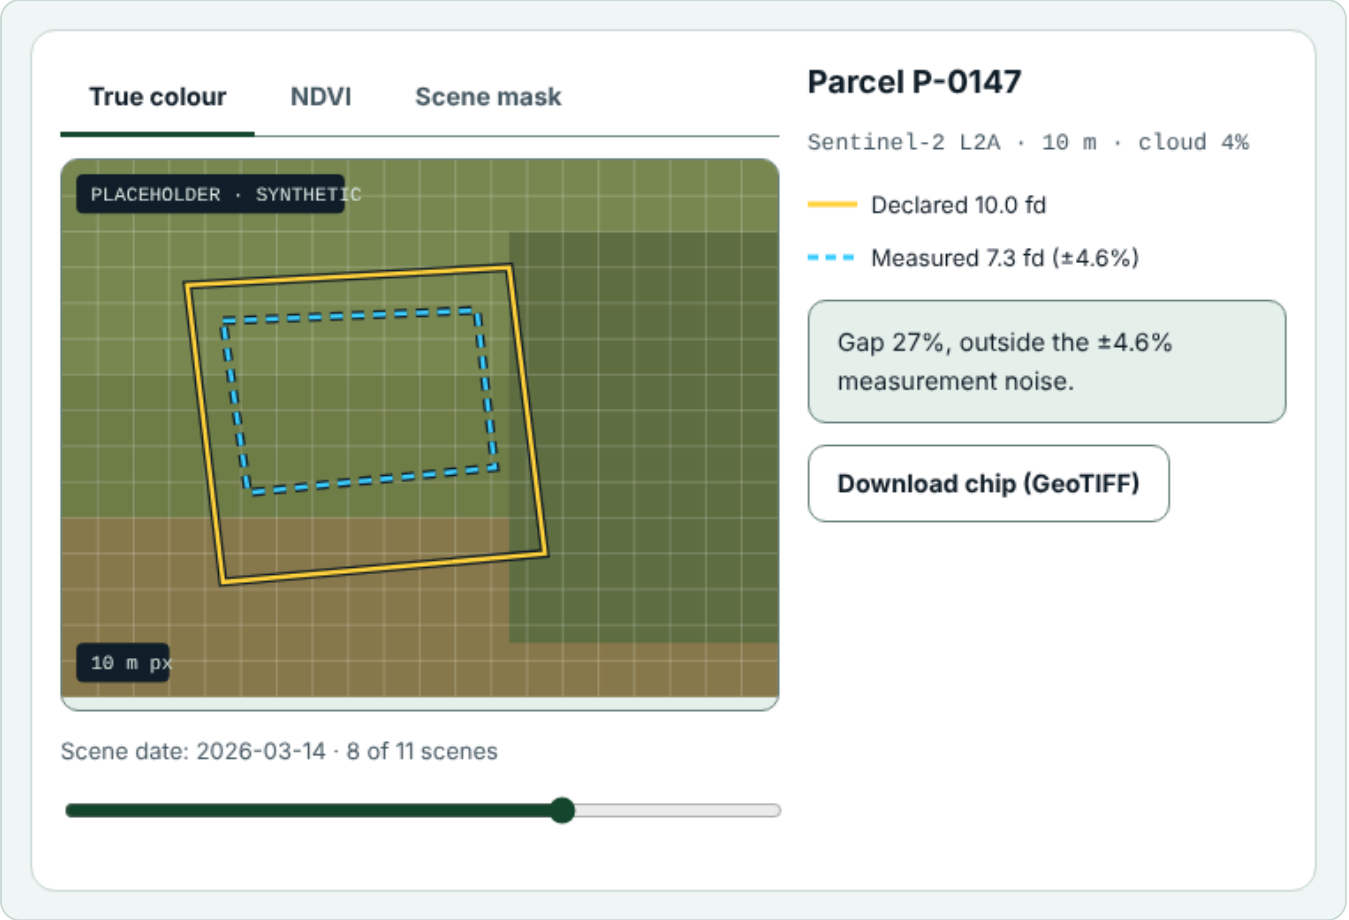


The viewer shows one parcel at a time: a satellite chip with the declared boundary and the measured footprint over it, the 10 m pixel grid, and a date slider through the usable scenes.

Layers are True colour, NDVI and Scene mask (cloud, shadow and unusable pixels hatched). NDVI uses `img-ndvi-low`, `img-ndvi-mid` and `img-ndvi-high` with a legend that names the 0.25, 0.5 and 0.6 reference values. Never show NDVI without its legend and date.

The declared boundary is a solid `img-boundary` line and the measured footprint a dashed `img-measured` line, each with a `zr-navy` halo so they read on any scene; the two differ by dash as well as colour. Draw the pixel grid at 35% white and keep it on by default, because the pixel size is what limits what Zr3i can say.

Always print the sensor, level, resolution, date and cloud percentage as text, and the measurement noise next to any gap. Imagery in this system is a placeholder labelled PLACEHOLDER · SYNTHETIC; replace it with the real chip, never with a stock photo.

IntervalChart

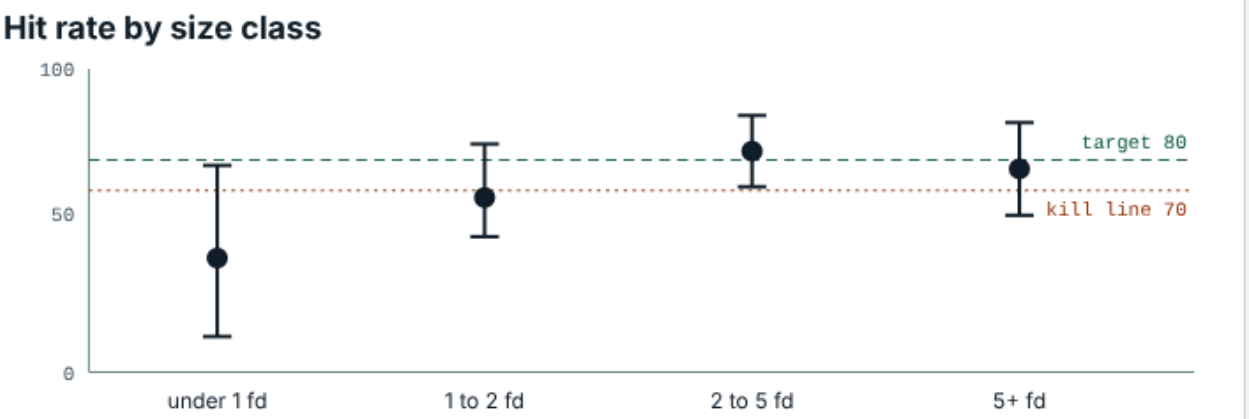


Illustrative synthetic values. Dots are point hit rates, bars are Wilson 95% intervals, one per size class. No pooled figure.

Hit rate is plotted per size class with a Wilson interval; the dot is the point estimate and the bar the interval. Draw the kill line at 70% (`flagged`, dotted) and the target at 80% (`confirmed`, dashed), each labelled with its number so the lines are not told apart by colour or dash alone.

Never plot a pooled rate across size classes, and never plot a class with no control set; show "Not established" text in its slot instead.

Charts stay left-to-right in Arabic pages (`ltr` wrapper) while axis words and the caption follow the page language. Use the `data` style for numbers and `ink-muted` for axes.

Navigation

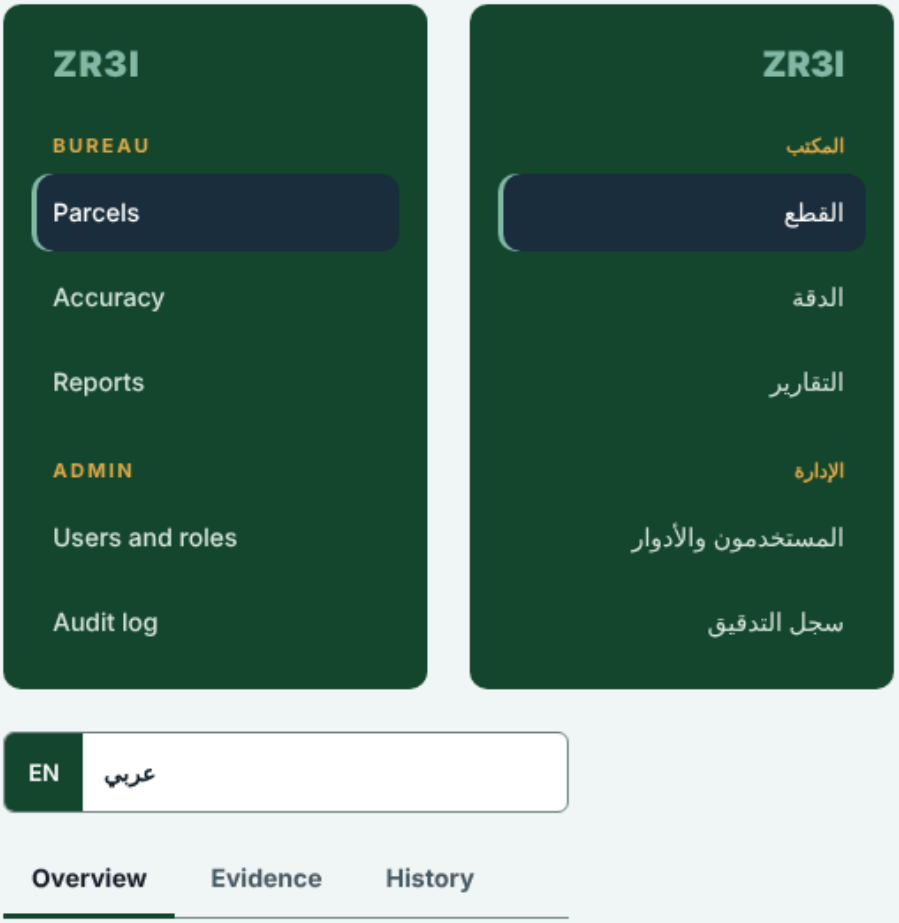


The sidebar is `zr-field` green, full height with square edges, with `zr-mist` text, group labels in `zr-amber` and the active item marked by a 3px `zr-sage` bar on the start edge (left in English, right in Arabic) plus `aria-current="page"`. It lists only what the signed-in role may open; absent items are not greyed out.

The language toggle is a two-button pill, EN and عربي, always visible in the header of every screen including login, and it keeps the current screen and selection. It sets `lang` and `dir` on the document and stores the choice per user.

Tabs switch views of one object (a parcel's Overview, Evidence and History). The selected tab is marked by a `brand` underline and darker text, not colour alone. On phones the sidebar becomes a bottom bar of at most four items.

PhotoCard

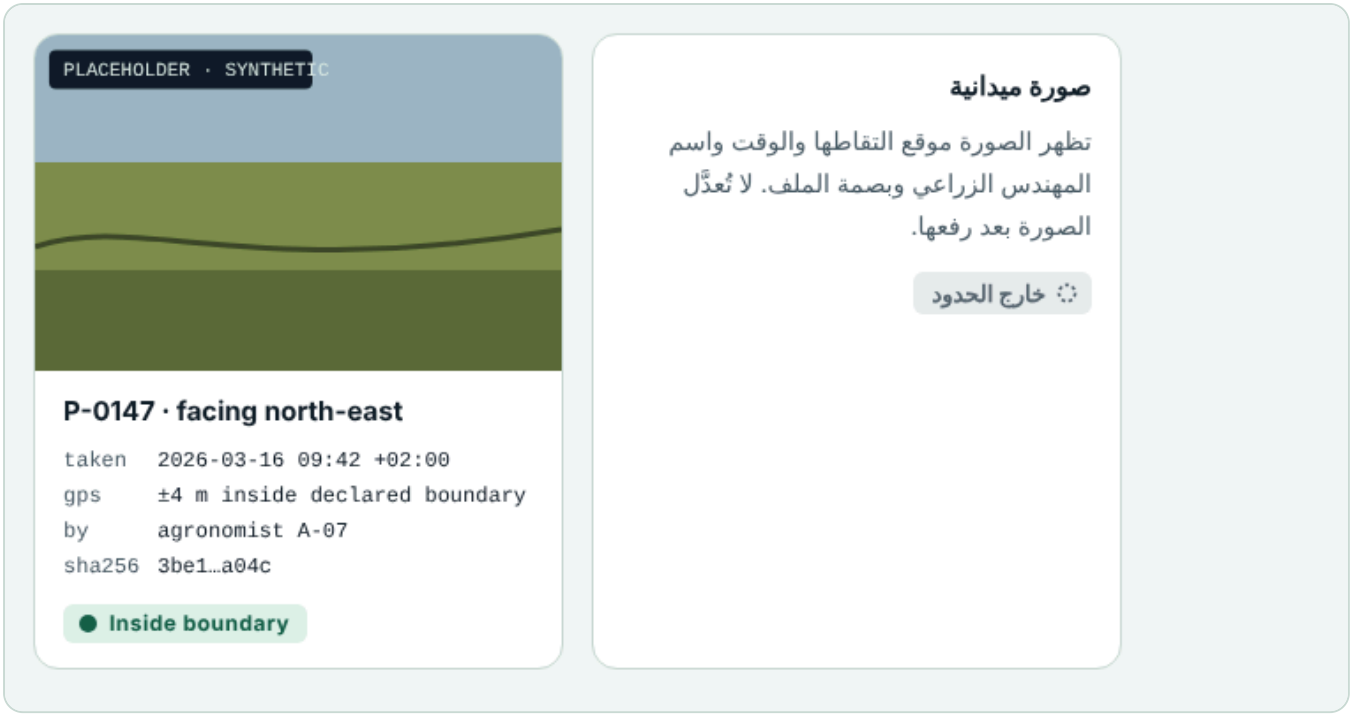

A field photo is evidence only with its provenance beside it: timestamp with offset, GPS and accuracy, the agronomist id, the parcel id and a SHA-256 of the original file. Show them as text under the image in `data` style; the image is never shown without them.

State the relation to the declared boundary with a StatusPill: Inside boundary (confirmed) or Outside boundary (not-assessable, grey, because a photo does not by itself falsify a declaration). Photos are immutable after upload; show no edit, crop or filter control.

Photos never carry faces of people as a subject; blur any person before display and keep the original unblurred in the vault. Do not use stock photography in the product. Marketing surfaces may use the Zr3i wheat photography only under a `zr-navy` scrim.

RiskBand



The risk band is a square chip with a 24px bold letter, a one-word label and the band colour (`band-a` to `band-e`, letter in `on-band-*`). A is lowest risk, E highest. The chip is never shown without the index name, the percentile and the maturity badge.

Bands belong to the risk module only. Do not use them for verdicts, status or decoration, and never show a band as a bare colour.

The maturity badge (`maturity-bg`, `maturity-ink`) states `Specified`, `Calibrated` or `Validated`, in upper-case Roboto. For the CRI and FRI method FRI-2026-01 it reads "Specified · not calibrated" and the method version is printed beside it. A tenant cannot hide it.

Copy: "production-risk percentile". Never score, rating, probability of default, approval or limit.

StatusPill



Every parcel line carries exactly one of: CONFIRMED (filled circle, `confirmed`), FLAGGED (triangle, `flagged`), pending (half circle, `pending`) or NOT_ASSESSABLE (dashed circle, `not-assessable`). The pill always shows icon and word; colour is the third cue, never the only one.

FLAGGED means "a measured fact disagrees with the declaration and a person should look". It is never labelled Rejected, Failed or High risk. NOT_ASSESSABLE and "Below resolution" share the grey dashed circle because the test could not run. Never show them as "No crop".

Status fills use the `-bg` tokens, and the text colour is the matching status token. Do not reuse the A to E band colours from the Zr3i deck for these states; those bands belong to the Risk module only (RiskBand) and are never used as verdict colours.

Table

PARCEL	DECLARED FD	MEASURED FD	STATE
P-0147	10.0	7.3	● Confirmed
P-0212	4.2	4.1	● Confirmed
P-0233	1.5	—	◌ Below resolution
P-0291	6.0	4.0	▲ Flagged
P-0310	3.0	—	◑ Pending second pass

الحالة	المقيسة (فدان)	المُعلنة (فدان)	القطعة
● مؤكَّدة	7.3	10.0	P-0147
▲ مُعلَّمة	4.0	6.0	P-0291


Tables list parcels, tranches, users or evidence. Header cells are `label` style on `sunken`; rows are 44px or taller with a `line` divider; the selected row is tinted `zr-mist` (light) or `sunken` (dark) and has `aria-selected="true"`.

Numbers are right-aligned in the page's end direction and set in `data` (mono, Western digits), with the unit in the column header, never in each cell. Parcel ids are left-to-right in both languages.

The state column always uses StatusPill. Missing measurement is "—" with a StatusPill explaining why; an empty cell is never left unexplained.

Rows are never ranked or scored. Sort by id, declared area or state; the default is id.

VerdictBar

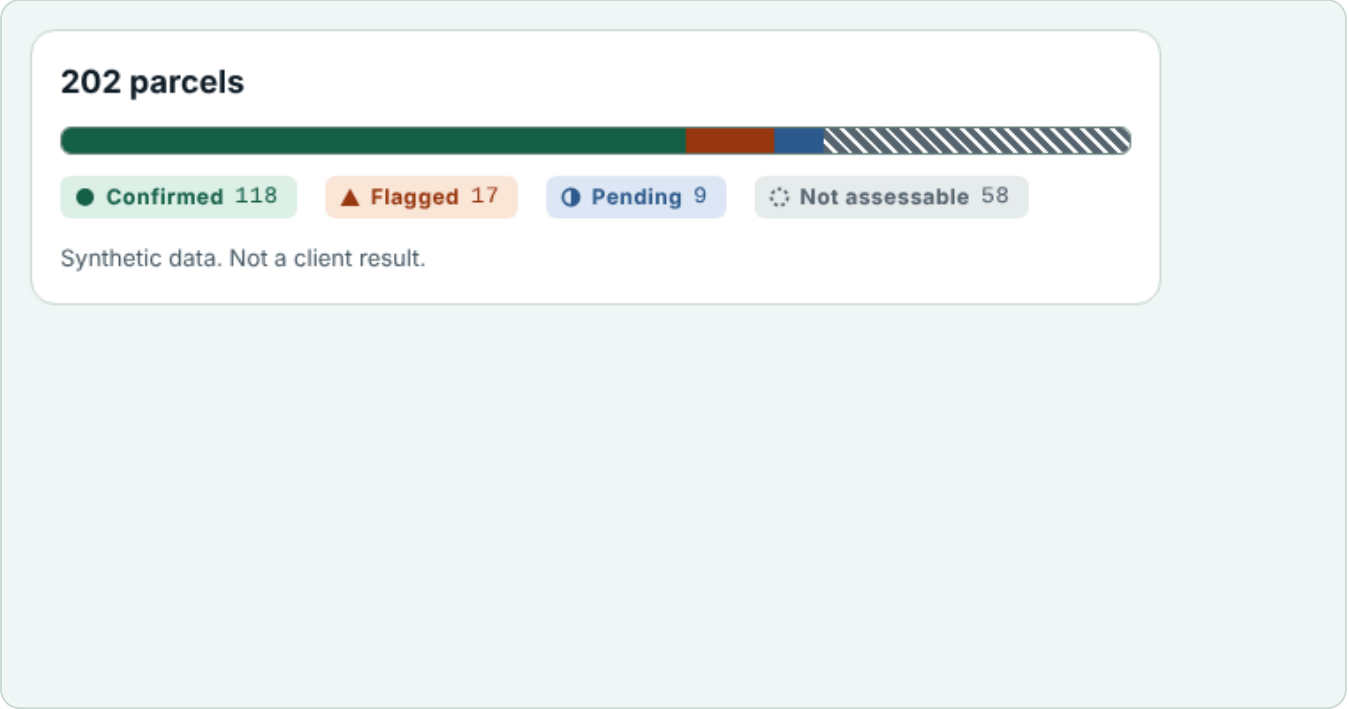

Show the verdict mix as one stacked bar with counts in a legend underneath. Segments are ordered Confirmed, Flagged, Pending, Not assessable and always sum to the parcel total shown above the bar.

Not assessable is drawn with a diagonal hatch so it stays distinct when printed in grey. Give the bar an `aria-label` that lists every count.

Do not show a single percentage such as "58% good". Readable share is reported by size class (see IntervalChart), never pooled.

Wordmark



The Zr3i wordmark is set in plain type: "ZR3I" in Roboto Black caps, white on `zr-sage` (very large only), with a 128 by 4px `zr-ember` rule beneath and a letter-spaced bold eyebrow above.

The supplied logo files (the 2022 leaf-on-the-i mark and the Overview Deck lettering) are not in this system, so nothing here redraws them. When the approved vector files arrive, put them in `assets/Logos/` and replace this component.

The DigiWell endorsement is the line "a DigiWell product" in 12px `zr-mist` under a hairline, placed only on login, report footers and the about page. It is a placeholder: no DigiWell logo or colour has been supplied, so DigiWell contributes no colour or type to the product.

Never place the wordmark on `zr-ember` or on photography without a `zr-navy` scrim. Never letter-space the Arabic line.