

NAME=Mohd Ahmad

ECN Number= 4739

WEEK_6_ASSIGNMENT

QUESTION_1_-

App.JAVA

```
import java.text.DecimalFormat;
```

```
import org.springframework.context.ApplicationContext;
```

```
import org.springframework.context.support.ClassPathXmlApplicationContext;
```

```
//main class
```

```
public class App {
```

```
    public static void main(String[] args) {
```

```
        // TODO Auto-generated method stub
```

```
        //spring.xml file is invoked
```

```
        ApplicationContext context = new ClassPathXmlApplicationContext("Spring.xml");
```

```
        //down casting from object to string
```

```
        BillCalculator bill = (BillCalculator)context.getBean("bill");
```

```
        String pattern="##.0";
```

```
        DecimalFormat df=new DecimalFormat(pattern);
```

```
        //calling method of POJO class
```

```
        System.out.println("Total bill to pay is $" + (df.format(bill.calculateBill())));
```

```
    }
```

```
}
```

BILL CALCULATOR .JAVA

```
public class BillCalculator {
```

```

//fields
private int units;
private double tax;
private double unitPrice;

//default constructor
public BillCalculator() {
    this(0,0.0d,0.0d);
}

//parameterized constructor
public BillCalculator(int units,double tax,double unitPrice) {
    this.units=units;
    this.tax=tax;
    this.unitPrice=unitPrice;
}

//method
public double calculateBill() {
    return (unitPrice+(unitPrice*tax))*units;
}
}

```

Spring.xml

```

<?xml version="1.0" encoding="UTF-8"?>
<beans
    xmlns="http://www.springframework.org/schema/beans"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:p="http://www.springframework.org/schema/p"
    xsi:schemaLocation="http://www.springframework.org/schema/beans
http://www.springframework.org/schema/beans/spring-beans-3.0.xsd">

    <bean id="bill" class="com.mybank.bank.BillCalculator">
        <constructor-arg name="units" value="100" type="int"></constructor-arg>
        <constructor-arg name="tax" value="0.18" type="double"></constructor-arg>
        <constructor-arg name="unitPrice" value="10.0 "
type="double"></constructor-arg>
    </bean>
</beans>

```

Junit test

```
import static org.junit.jupiter.api.Assertions.*;
```

```
import org.junit.jupiter.api.Test;
```

```
//Testing the BillCalculator class
```

```

class TestBillCalculator {

    //initialization by constructor

    BillCalculator bcal= new BillCalculator(100,0.18,10.0);

    //calculateBill() method is tested

    @Test

    void testCalculateBill() {

        //1st param - expected value, 2nd param- actual value, 3rd param- difference btw
        actual and expected values

        assertEquals (1180.339,bcal.calculateBill(),0.4);

    }

}

```

Pom.xml

```

<project xmlns="http://maven.apache.org/POM/4.0.0"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
http://maven.apache.org/xsd/maven-4.0.0.xsd">
    <modelVersion>4.0.0</modelVersion>

    <groupId>com.mybank</groupId>
    <artifactId>Week6_Q1</artifactId>
    <version>0.0.1-SNAPSHOT</version>
    <packaging>jar</packaging>

    <name>Week6_Q1</name>
    <url>http://maven.apache.org</url>

    <properties>
        <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
    </properties>

    <dependencies>
        <dependency>
            <groupId>junit</groupId>
            <artifactId>junit</artifactId>
            <version>3.8.1</version>
            <scope>test</scope>
        </dependency>

        <!-- https://mvnrepository.com/artifact/org.springframework/spring-
context -->
    </dependencies>

```

```

<groupId>org.springframework</groupId>
<artifactId>spring-context</artifactId>
<version>5.3.23</version>
</dependency>

<!-- https://mvnrepository.com/artifact/org.springframework/spring-context-support -->
<dependency>
<groupId>org.springframework</groupId>
<artifactId>spring-context-support</artifactId>
<version>5.3.23</version>
</dependency>

</dependencies>
</project>

```

Question 2-

Billcalculator.java

```

package com.mybank.bean;

import org.springframework.stereotype.Component;

@Component
public class BillCalculator {
    //fields
    private int units;
    private double tax;
    private double unitPrice;

    //default constructor
    public BillCalculator() {
        this(0,0.0d,0.0d);
    }

    //parameterized constructor
    public BillCalculator(int units,double tax,double unitPrice) {
        this.units=units;
        this.tax=tax;
        this.unitPrice=unitPrice;
    }

    //method
    public double calculateBill() {
        return (10.0+(10.0*0.18))*10;
    }
}

```

SPRINGCONFIGURATION.JAVA

```

import org.springframework.context.annotation.ComponentScan;
import org.springframework.context.annotation.Configuration;

```

```
//bean class package is invoked by the help of annotation
@Configuration
@ComponentScan(basePackages = "com.mybank.bean")
public class SpringConfiguration {

}
```

APP.JAVA

```
package com.mybank.ui;

import java.text.DecimalFormat;

import org.springframework.context.ApplicationContext;
import org.springframework.context.annotation.AnnotationConfigApplicationContext;

import com.mybank.bean.BillCalculator;
import com.mybank.configuration.SpringConfiguration;

//main class(user interface class)
public class App {

    public static void main(String[] args) {
        // TODO Auto-generated method stub
        //Configuration class is invoked
        ApplicationContext applicationContext = new
AnnotationConfigApplicationContext(SpringConfiguration.class);

        //Spring's Application Context initializes the beans by calling getBean method
        BillCalculator bill = (BillCalculator) applicationContext.getBean(BillCalculator.class);
```

```

        String pattern="##.0";

        DecimalFormat df=new DecimalFormat(pattern);

        //Bean class(BillCalculator) method is called

        System.out.println("Total bill to pay is $" +(df.format(bill.calculateBill())));

    }

}

```

POM.XML

```

<project xmlns="http://maven.apache.org/POM/4.0.0"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
http://maven.apache.org/xsd/maven-4.0.0.xsd">
    <modelVersion>4.0.0</modelVersion>

    <groupId>com.mybank</groupId>
    <artifactId>Week6_Q2</artifactId>
    <version>0.0.1-SNAPSHOT</version>
    <packaging>jar</packaging>

    <name>Week6_Q2</name>
    <url>http://maven.apache.org</url>

    <properties>
        <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
        <maven.compiler.target>1.8</maven.compiler.target>
        <maven.compiler.source>1.8</maven.compiler.source>
    </properties>

    <dependencies>
        <dependency>
            <groupId>junit</groupId>
            <artifactId>junit</artifactId>
            <version>3.8.1</version>
            <scope>test</scope>
        </dependency>

        <dependency>
            <groupId>org.springframework</groupId>
            <artifactId>spring-context</artifactId>
            <version>5.3.18</version>
        </dependency>

    </dependencies>
</project>

```

Question 3-


Dependency Injection:

Dependency Injection (DI) is a design pattern used to implement IoC. It allows the creation of dependent objects outside of a class and provides those objects to a class through different ways. Using DI, we move the creation and binding of the dependent objects outside of the class that depends on them.

The Dependency Injection pattern involves 3 types of classes.

1. **Client Class:** The client class (dependent class) is a class which depends on the service class
2. **Service Class:** The service class (dependency) is a class that provides service to the client class.
3. **Injector Class:** The injector class injects the service class object into the client class

The following figure illustrates the relationship between these classes:

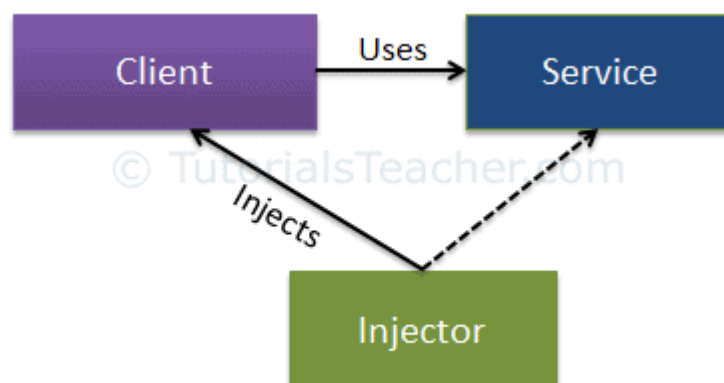

Dependency Injection

Types of Dependency Injection:

As you have seen above, the injector class injects the service (dependency) to the client (dependent). The injector class injects dependencies broadly in three ways: through a constructor, through a property, or through a method.

1. Constructor Injection
2. Property Injection
3. Method Injection

1.Constructor Injection: In the constructor injection, the injector supplies the service (dependency) through the client class constructor.

2.Property Injection: In the property injection (aka the Setter Injection), the injector supplies the dependency through a public property of the client class.

3.Method Injection: In this type of injection, the client class implements an interface which declares the method(s) to supply the dependency and the injector uses this interface to supply the dependency to the client class.

Example of Constructor Injection:

```
<bean id="project" class="app.myspringapp.Project">  
    <constructor-arg value="MIS"></constructor-arg>  
    <constructor-arg value="San Diago"></constructor-arg>  
</bean>
```

Inversion of Control:

Spring loc (Inversion of Control) Container is the core of [Spring Framework](#). It creates the objects, configures and assembles their dependencies, manages their entire life cycle. The Container uses Dependency Injection(DI) to manage the components that make up the application. It gets the information about the objects from a configuration file(XML) or Java Code or Java Annotations and Java POJO class. These objects are called Beans. Since the Controlling of Java objects and their lifecycle is not done by the developers, hence the name Inversion of Control.

There are 2 types of loc containers:

1.Bean Factory

2.Application Context

That means if you want to use an IoC container in spring whether we need to use a BeanFactory or ApplicationContext. The BeanFactory is the most basic version of IoC containers, and the ApplicationContext extends the features of BeanFactory. The followings are some of the main features of Spring IoC,


- Creating Object for us.
- Managing our objects.
- Helping our application to be configurable.
- Managing dependencies.

Example of Ioc Containers:

```
public class Mobile {  
    public static void main(String[] args) {  
        // Using ApplicationContext to implement Spring IoC  
  
        ApplicationContext applicationContext = new  
        ClassPathXmlApplicationContext("beans.xml");  
  
        // Get the bean  
        Sim sim = applicationContext.getBean("sim", Sim.class);  
  
        // Calling the methods  
        sim.calling();  
        sim.data();  
    }  
}
```

And now if you want to use the Airtel sim so you have to change only inside the **beans.xml** file. The main method is going to be the same.

```
<bean id="sim" class="Airtel"></bean>
```

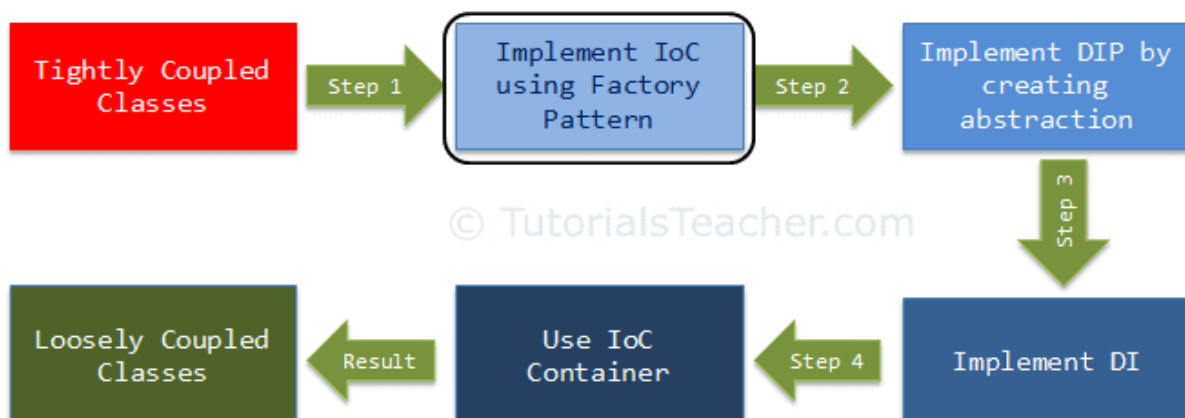

Steps of Ioc Containers