IoT Cat Feeder

An automatic, timed cat feeder with a web dashboard on the ESP8266

Project Report

Chindanai Jaiman 662115012
Bachelor of Science Software Engineering Program
College of Arts, Media, and Technology, Chiang Mai University

November 2026

Project Advisor
Asst.Prof.Phudinan Singkhamfu, Ph.D.

Table of Contents

Part I Project Proposal **5**
Chapter 1 Introduction **6**
1.1 Motivation 6
1.2 Purpose 6
1.3 Target Users and Intended Experience 6
1.4 Project Scope 7
1.5 Objectives 7
Chapter 2 Review and Analysis **8**
2.1 Business and Software Review 8
2.2 Tool and Technology Review 8
2.3 Risk Analysis 9
Chapter 3 Product Perspective **11**
3.1 Product Perspective 11
3.2 Product Features 11
3.3 System Architecture 11
3.4 Use Case Overview 11
Chapter 4 Quality Planning **13**
Chapter 5 Limits, Milestones, and Deliverables **14**
5.1 Limits 14
5.2 Milestones 14
5.3 Deliverable Items 14
5.4 Budget 14
5.5 Future Work 15
Part II Software Requirements Specification **16**
Chapter 6 Introduction **17**
6.1 Purpose 17
6.2 Scope 17
6.3 Product Perspective 17
6.4 Product Functions 18
6.5 User Characteristics 18
6.6 Limitations 18
6.7 Assumptions and Dependencies 18
6.8 Acronyms and Definitions 19
6.9 References 19
6.10 Document Control 20
Chapter 7 Specification Requirements **21**
7.1 Feature Description 21
7.2 Use Case Diagram 22
7.3 Use Case Description 23
7.4 Activity Diagram 25
7.5 Functional Requirements 25

7.6 External Interface Requirements....26
7.7 Data Requirements....27
7.8 Quality Requirements....28
7.9 Design Constraints....28
7.10 Verification....28
Appendix A Rubric Coverage....30
Part III Software Design Description....31
Chapter 8 Introduction....32
8.1 Purpose....32
8.2 Scope....32
8.3 Design Overview....32
8.4 Definitions....32
Chapter 9 System Architecture....33
9.1 Architectural Overview....33
9.2 Context View....33
9.3 Component View....34
9.4 Deployment and Power Design....34
9.5 Design Rationale....35
Chapter 10 Detailed Design....36
10.1 Data Design....36
10.2 Component Description....36
10.3 State Design....37
10.4 Interaction Flows....38
10.5 Interface Design....38
10.6 Timing and Resource Budget....39
10.7 Error Handling and Recovery....39
10.8 Security Considerations....40
Chapter 11 Traceability and Verification....41
11.1 Requirements Traceability Matrix....41
11.2 Test Plan....41
11.3 Known Limitations....42
11.4 Future Work....42
Appendix B Design Review Checklist....43
Part IV Output and Discussion....44
Chapter 12 The Delivered System....45
12.1 Hardware on the bench....45
12.2 Firmware behaviour as delivered....45
12.3 Configuration in the delivered firmware....45
Chapter 13 Test Results....47
13.1 Procedure....47
13.2 Measured results....47
13.3 Evidence collected....47
Chapter 14 Discussion....48

14.1 Clock and schedule....48
14.2 Flap safety....48
14.3 Presence detection....48
14.4 Hopper level....48
14.5 The portion control decision....48
14.6 Defects found and fixed....48
14.7 Limitations and threats to validity....49
Part V Conclusion and Future Work....50
Chapter 15 Conclusion....51
15.1 Summary....51
15.2 Against the objectives....51
15.3 Lessons....51
15.4 Limitations accepted in this version....51
Chapter 16 Future Work....53
16.1 Portion control by weight....53
16.2 Persistence and notification....53
16.3 Cat identity and imaging....53
16.4 Reliability and enclosure....53

Part I Project Proposal

Problem, objectives, scope, review, and quality planning.

Chapter 1 Introduction

1.1 Motivation

A cat that is fed by hand eats at the convenience of the owner, not at a fixed time. When the owner leaves for work in the morning and returns in the evening, the usual workaround is to pour a large portion into the bowl and let the cat graze all day. Two problems follow. The food sits in the open bowl for ten hours or more, and the cat eats the entire portion before noon and then begs for the rest of the day.

The second problem is portion control. Dry food is calorie dense, and a cat that free feeds commonly gains weight. Veterinary guidance for an adult cat of average weight is a measured daily ration split across several meals, not an open bowl. An owner who is not at home at lunchtime cannot deliver the middle meal.

Commercial automatic feeders solve the timing problem, but most of them depend on a cloud service and a mobile app to program the schedule. If the vendor changes the app, or the household Wi-Fi is replaced, the device becomes a plastic box. For a student project the interesting engineering question is whether the same behaviour can be produced on a microcontroller that the owner can read, repair, and reflash.

1.2 Purpose

This project builds a cat feeder that dispenses dry food at three fixed times per day and also on demand from a phone. The device serves its own web dashboard over the local Wi-Fi network, so no account, no cloud service, and no vendor app are required. The owner opens a browser, sees the current state of the flap and the number of meals served today, and can trigger a feeding with one tap.

The project is also a study of the boundary between software and hardware. The interesting part is not the web page. It is the electrical and timing behaviour that the web page depends on: a servo that stalls and browns out the board, a clock that is wrong until the network answers, and a flap that must never stay open.

1.3 Target Users and Intended Experience

The system has two users with very different needs. The design is judged on whether both are served without one damaging the other.

1.3.1 Persona: The owner

Table 1. Owner persona

Attribute	Detail
Name	Nok
Age	29
Occupation	Office worker, Chiang Mai
Background	Lives in a rented room with one adult cat. Leaves at 07:30 and returns at 18:30. Uses a phone for everything. Has no tools beyond a screwdriver.
Goals	Feed the cat on a predictable schedule. Check from work that the morning meal was served. Add an extra meal when the cat begs.
Pain points	Cannot come home at lunch. Forgets whether the morning meal was served. Does not want another app account, and does not want to learn a configuration language.
Experience requirement	Open one page, read five values, tap one button. No login, no setup wizard, no pairing step.

1.3.2 Persona: The cat

Table 2. Cat persona and constraints

Attribute	Detail
Subject	One adult domestic cat, 4 kg
Behaviour	Eats at the sound of the flap. Approaches the device when it is near the bowl.
Constraint	The cat must not be able to open the flap with a paw, and must not be trapped by it.
Experience requirement	A meal arrives without the cat having to touch anything. The flap cycle is short enough not to startle the cat away from the bowl.

1.4 Project Scope

The scope is set so that the work is complete and demonstrable on 4 November 2026. Features that cannot be finished and tested by 2 November are moved to Future Work rather than shipped half-built.

Table 3. Scope of the delivered system

In scope	Out of scope
Scheduled feeding at three times per day using NTP time	Cloud storage and a hosted dashboard
On-demand feeding from a browser on the same network	A native mobile application
Flap status, daily meal count, last meal time and source	User accounts and authentication
Automatic flap close after a fixed open interval	Wet food dispensing
Cat presence detection with an ultrasonic sensor (target)	Camera or two-way audio
Hopper level from a downward ultrasonic sensor	Portion control by weight with a load cell
	Support for more than one feeder or more than one cat

Portion control left the scope on 2 November, when the header pins of the amplifier were found to be unsoldered. It moved to Future Work rather than ship half-built. Presence detection is wired and integrated, and it ships if it passes the test on 3 November. A requirement that is written and tested earns credit, while a half-connected sensor does not.

1.5 Objectives

1. Deliver food at 08:00, 13:00, and 18:00 local time, using time obtained from a network time server rather than a countdown timer.
2. Serve a dashboard from the ESP8266 itself, reachable from a phone on the same Wi-Fi network in under two seconds.
3. Close the flap automatically after every feeding, in all code paths, including the path where the browser disconnects immediately after sending the command.
4. Record the time, count, and trigger source of each meal so the owner can confirm a feeding happened.
5. Detect a cat within 60 cm and dispense a meal in under two seconds, at most once per 30 minutes.
6. Document the design so another student can rebuild the device from the repository alone.

Chapter 2 Review and Analysis

2.1 Business and Software Review

The review below is written for a device that already exists in commercial form. The project is not trying to win on features. It is trying to win on independence, repairability, and cost.

2.1.1 Strengths

- **No cloud dependency.** The dashboard is served by the device. The system keeps working when the internet is down, and it works in a room with no router if the access point is provided by a phone.
- **Low cost.** The bill of materials is roughly one tenth of a mid-range commercial feeder, because there is no enclosure injection moulding, no app, and no subscription.
- **Measured portion instead of a timer.** Most low-cost feeders open a gate for a fixed time and trust gravity. A load cell turns the same mechanism into a closed loop, which is the difference between a timer and a controller.
- **Documented and repairable.** One firmware file, one wiring page, and one design document. A failed servo is a 100 baht replacement, not a warranty claim.

2.1.2 Weaknesses

- **Single point of failure.** If the ESP8266 reboots mid-cycle the meal is lost. There is no watchdog external to the board.
- **History lives in RAM.** A power cut erases the daily count. This is a known limitation and is listed in the requirements.
- **The enclosure is cardboard.** It is adequate for a demonstration and honest about being a prototype, but it is not cat-proof over months.
- **One cat, one hopper.** There is no identity and no separation if a second cat uses the device.

2.1.3 Opportunities

- **Presence-aware feeding.** The same ultrasonic sensor that measures the hopper level can detect an approaching cat, so one hardware decision serves two requirements.
- **Local-first pattern.** The firmware is a small, readable example of a device that serves its own UI, which is useful for other course projects and for the owner's own repairs.
- **Data without a database.** A short ring buffer in flash is enough to answer the owner's only question, which is whether the cat was fed today.

2.1.4 Threats

- **Servo current draw.** A stalled servo can pull enough current to brown out the board. This was observed during bring-up and is the main electrical risk.
- **Wi-Fi band mismatch.** The ESP8266 is 2.4 GHz only. A 5 GHz-only phone hotspot cannot be used.
- **Sensor false positives.** A reflective hopper wall can fool an infrared proximity sensor into reporting food that is not there. This is why ultrasonic ranging is chosen for the level measurement.
- **Scope pressure.** A five-day window invites feature creep. The scope rule in 1.4 exists for this reason.

2.2 Tool and Technology Review

Each decision below was made against at least one alternative. The rejected option is recorded so the reader can see the trade that was accepted.

Table 4. Technology decisions

Decision	Chosen	Rejected	Rationale
Microcontroller	NodeMCU v3, ESP8266	Arduino Uno with ESP-01, ESP32	Already owned. Has Wi-Fi and a 3.3 V regulator on board. The ESP32 is better but adds cost and no requirement needs it.
Actuator	Servo SG90	Stepper motor, solenoid	The servo holds an angle without power cycling and needs one PWM pin. A solenoid slams and needs a driver transistor.
Time source	SNTP over Wi-Fi	DS3231 real-time clock	No extra part, no battery, and the time is correct after every boot. An RTC drifts and needs a battery holder.
Transport	HTTP on the device	MQTT broker, Blynk	HTTP needs no broker and no account. Blynk hides the implementation behind a vendor widget, which removes the work the assessment is looking for.
Dashboard	Embedded HTML and JavaScript in PROGMEM	SPIFFS files, external CDN	One flash image, no filesystem, no internet dependency, and the page cannot lose its assets.
Presence sensing	HC-SR04 ultrasonic	FC-51 infrared proximity	Ultrasonic reports distance, which supports both presence and level. The FC-51 is binary and is fooled by a cardboard hopper wall.
Portion control	Open-loop flap timing	HX711 with 1 kg load cell	The load cell measures the actual mass, but the amplifier header pins were not soldered before the deadline. Open-loop timing ships, and the closed loop moves to Future Work.

2.3 Risk Analysis

Table 5. Risk register

ID	Risk	Likelihood	Impact	Mitigation
R-01	Servo stall browns out the board and reboots it mid-meal	High	High	Power the servo from the powerbank rail, not from 3V3. Add a 470 uF capacitor across VIN and GND. Test the worst case with servo_test.ino before integrating.
R-02	Flap stays open and the hopper empties	Medium	High	The close is driven from millis() in the main loop, not from a network callback, so a dropped client cannot strand the flap.
R-03	Clock is wrong or jumps backward after a resync	Medium	Medium	Ignore the schedule until the clock passes a fixed epoch. A duplicate meal inside the same minute is prevented by a minute key.
R-04	Ultrasonic readings oscillate on a kibble surface	High	Medium	Sample ten times per measurement and use the median. Reject echoes outside the hopper depth.
R-05	Load cell work is not finished before the deadline	Medium	Medium	Occurred on 2 November. The amplifier header pins were never soldered, so portion control moved to Future Work and the slot went to the 24 hour schedule test.
R-06	Wi-Fi in the examination room blocks the device	Low	High	The dashboard is reachable in the local network, so the demonstration does not depend on internet access. A phone hotspot is the fallback.
R-07	Parts do not arrive before 30 October	Medium	High	The firmware already meets the schedule and dashboard requirements without any sensor. The sensors are additive, not load bearing.

Chapter 3 Product Perspective

3.1 Product Perspective

The device is a standalone appliance with a browser interface. It is not a component of a larger platform, and it does not report to a server. This choice is deliberate. A self-hosted device has a smaller attack surface, a smaller failure surface, and a demonstration that survives a broken internet connection.

Inside the appliance there are four responsibilities. The web layer turns HTTP requests into commands and status. The scheduler compares local time against a fixed table of meals. The actuation layer drives the servo. The state layer records what happened. The important design rule is that every feeding path, whether from the browser, the clock, or a sensor, passes through one function so that counting and safety rules cannot diverge.

3.2 Product Features

Table 6. Feature summary

ID	Feature	Actor	Status
F1	Scheduled feeding at 08:00, 13:00, and 18:00 using NTP time	System clock	Delivered
F2	On-demand feeding from the web dashboard	Owner	Delivered
F3	Flap status, daily count, last meal, and connection quality	Owner	Delivered
F4	Cat presence detection and presence-triggered meal	Cat	Parts received
F5	Hopper level reported as a percentage of depth	System	Parts received

3.3 System Architecture

The context diagram below shows every entity that the device exchanges energy or data with. Dashed elements are planned and are marked as such so the diagram does not claim hardware that is not on the bench.

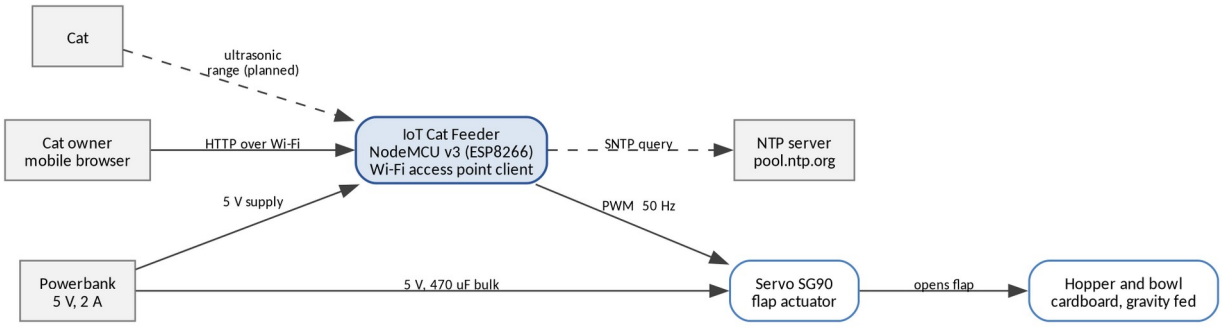


Figure 1. Context diagram of the proposed system.

3.4 Use Case Overview

Five use cases are identified. UC-01 to UC-03 are delivered. UC-04 is the presence target. UC-05 is the portion target, which moved to Future Work on 2 November.

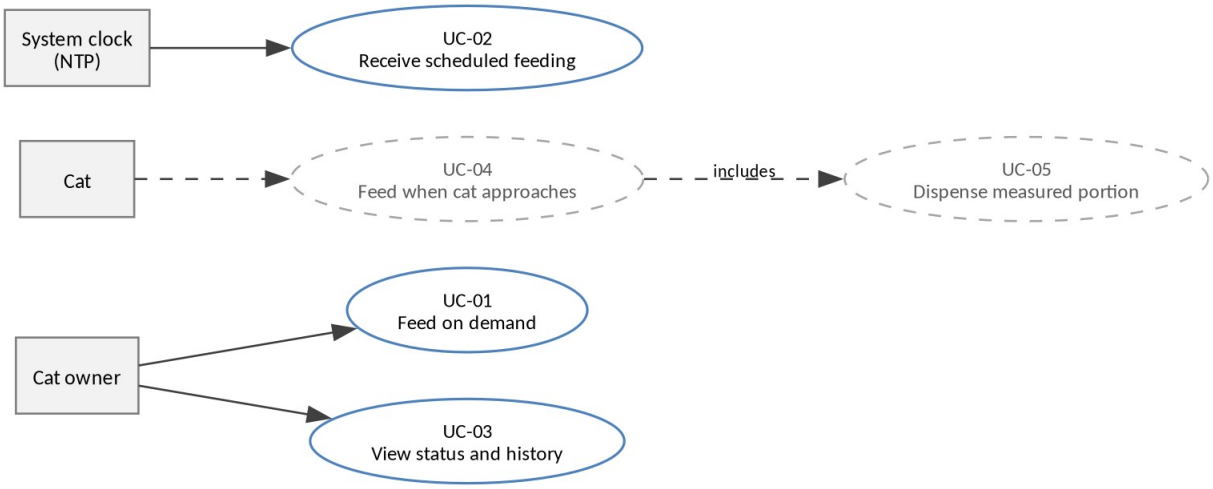


Figure 2. Use case diagram. Dashed use cases are planned.

Chapter 4 Quality Planning

Quality requirements are grouped by category and given identifiers so the design and the test plan can refer to them. The full text of each requirement is in the SRS.

Table 7. Quality requirement summary

Category	ID	Requirement in one line
Performance	NFR-PM-01	Dashboard responds within 2 seconds on the same network.
Performance	NFR-PM-02	Presence detection dispenses within 2 seconds of the cat entering range.
Reliability	NFR-RL-01	Flap never remains open longer than 3 seconds.
Reliability	NFR-RL-02	Device reconnects to Wi-Fi without a reboot.
Reliability	NFR-RL-03	Schedule works for 24 hours without drift beyond 1 minute.
Usability	NFR-UH-01	Dashboard is readable on a 375 px wide screen without zoom.
Usability	NFR-UH-02	A first-time user can feed the cat without instructions.
Security	NFR-SEC-01	Wi-Fi credentials are never committed to the repository.
Security	NFR-SEC-02	Only the documented HTTP methods are accepted.
Maintainability	NFR-OP-01	The firmware builds with the Arduino ESP8266 core and documented libraries.
Constraint	NFR-CP-01	Runs from a 5 V, 2 A powerbank with no laptop attached.
Constraint	NFR-CP-02	Operates at 2.4 GHz Wi-Fi only.

Chapter 5 Limits, Milestones, and Deliverables

5.1 Limits

- The submission deadline is 4 November 2026. Any feature not tested by 2 November is descoped.
- The build is limited to parts already owned plus a sensor budget of about 500 baht.
- The enclosure is built from cardboard and a food-safe bowl. Machining and 3D printing are not available in the time window.
- The device runs on a single board with no server, no database, and no cloud account.

5.2 Milestones

Table 8. Milestones

Date	Milestone	Exit criterion
30 Oct 2026	Documents and parts order	Proposal, SRS, and SDD drafted. Sensors ordered.
31 Oct 2026	Requirements frozen	Requirement set baselined in version control.
1 Nov 2026	Presence detection integrated	Cat detected in 16 of 20 trials.
2 Nov 2026	Portion control descoped, 24 hour test begun	Portion control moved to Future Work. The scheduled feeding test starts and runs for 24 hours.
3 Nov 2026	System test and evidence	All test cases executed. Photos and video captured.
4 Nov 2026	Submission	Repository tagged, report submitted.

5.3 Deliverable Items

1. The assembled feeder, working from a powerbank.
2. Firmware source in firmware/feeder/feeder.ino and the servo bring-up sketch in firmware/servo_test/servo_test.ino.
3. Wiring diagram in docs/wiring_nodemcu_servo.html.
4. This proposal, the SRS, and the SDD.
5. Test records with photographs.
6. The output and discussion chapter with measured results.
7. The conclusion and future work chapter.

5.4 Budget

Prices are estimates from general retail listings and are not yet confirmed with the supplier.

Table 9. Estimated bill of materials

Item	Quantity	Unit (baht)	Total (baht)
NodeMCU v3 (already owned)	1	0	0
Servo SG90 (already owned)	1	0	0
Capacitor 470 uF 16 V	1	10	10
HC-SR04P ultrasonic sensor	2	80	160
HX711 amplifier with 1 kg load cell	1	160	160
Breadboard, jumpers, resistor (already owned)	1 set	0	0
Cardboard, tape, food-safe bowl	1 set	50	50

Item	Quantity	Unit (baht)	Total (baht)
Powerbank 5 V 2 A (already owned)	1	0	0
Total			**380**

5.5 Future Work

- Restore portion control with the HX711 amplifier and a 1 kg load cell. The wiring diagram and the test sketch are already in the repository.
- Move the daily history into flash so it survives a power cut.
- Add an ESP32-CAM module for a still image per meal, so the owner can confirm the cat ate rather than the bowl.
- Identify the cat with an RFID collar tag so a second cat cannot take the portion.
- Add a hopper level alarm that publishes to the dashboard instead of only showing a value.
- Replace the cardboard enclosure with a printed or laser-cut body.

Part II Software Requirements Specification

Functions, use cases, interfaces, and verifiable requirements.

Chapter 6 Introduction

6.1 Purpose

This document specifies the requirements for the IoT Cat Feeder, version 1.0.0. It is written for the project advisor as the acceptance basis, for the developer as the input to the design, and for the examiner as the evidence that each requirement has a stated, checkable condition.

The document follows the structure of ISO/IEC/IEEE 29148 for software requirements. The section order is adapted to the size of the project: the standard separates product functions from detailed requirements, which this document keeps, and it separates verification from the requirement text, which this document keeps as a matrix in Section 7.10.

6.2 Scope

The product is a single-board appliance that dispenses dry cat food on a schedule and on demand, and reports its state through a web page served by the same board.

Table 10. System identification

Item	Value
Product name	IoT Cat Feeder
Version specified	1.0.0
Platform	NodeMCU v3, ESP8266EX, 80 MHz, 4 MB flash
Runtime	Arduino core for ESP8266, single-threaded main loop
Network role	Wi-Fi station client with an embedded HTTP server on port 80
Users	One owner, one cat
Operating environment	Indoor, 2.4 GHz Wi-Fi, 5 V 2 A supply

The product does not store data outside the device, does not authenticate users, and does not depend on any external service other than a network time server.

6.3 Product Perspective

The device is a standalone system. It replaces the manual act of pouring food, not a software component inside another product.

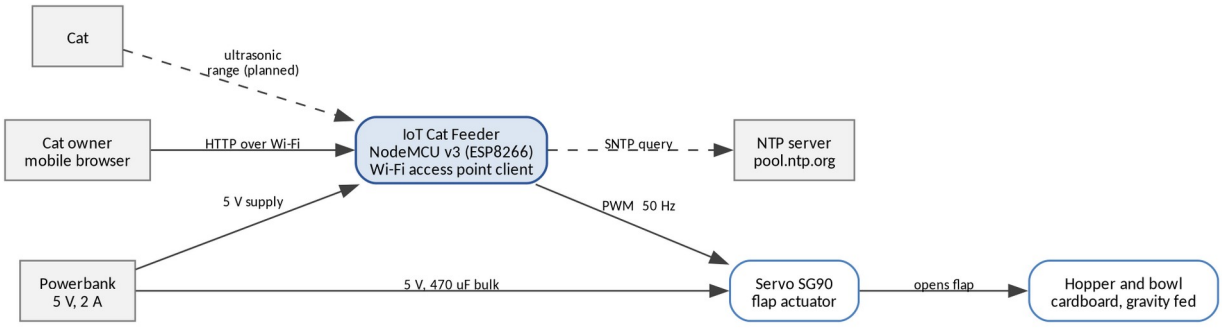


Figure 3. System context. Dashed elements are planned.

The owner is the only human actor. The clock is an external service that provides the time reference. The cat is an environmental actor whose position may become an input once the presence requirement is delivered.

6.4 Product Functions

Table 11. Product functions

ID	Function	Summary	Status
F1	Scheduled feeding	Dispenses one meal at each configured time, using network time.	Delivered
F2	On-demand feeding	Dispenses one meal when the owner presses the dashboard button.	Delivered
F3	Status and history	Reports flap state, daily count, last meal, and link quality.	Delivered
F4	Presence-triggered feeding	Dispenses a meal when a cat is detected near the bowl.	Parts received
F5	Hopper level monitoring	Reports the remaining food as a percentage of hopper depth.	Parts received

6.5 User Characteristics

Table 12. User classes

User class	Technical level	Characteristics and needs
Owner	Non-technical	Uses a phone browser. Expects a single page with a single action. Cannot be asked to install software, create an account, or read a manual.
Maintainer	Technical	Rebuilds and reflashes the device. Needs the wiring, the pin map, the library list, and the credentials file documented.
Cat	None	Interacts physically. Must not be able to open the flap or be caught by it.

6.6 Limitations

- History is held in RAM. A reboot clears the daily count.
- Any device on the same Wi-Fi network can issue a feeding command, because there is no authentication.
- Only dry food with a free-flowing particle size can be dispensed.
- The device cannot detect that the bowl is already full before dispensing.
- Only one feeder and one hopper are supported.
- The system does not operate without a 5 V supply.

6.7 Assumptions and Dependencies

Table 13. Assumptions and dependencies

ID	Statement	Effect if false
A-01	The Wi-Fi network is 2.4 GHz and reachable from the device position.	The device cannot join. The dashboard is unreachable.
A-02	A network time server is reachable at least once after each boot.	Scheduled feeding is disabled. Manual feeding still works.
A-03	The hopper holds at least 300 g of dry food.	Meals become short. The level requirement reports the shortage.
A-04	The servo can lift the flap without stalling.	Brownout or a failed meal. R-01 in the proposal covers the mitigation.
A-05	The owner's phone and the device are on the same subnet.	The dashboard cannot be reached by name

ID	Statement	Effect if false
		or address.

6.8 Acronyms and Definitions

6.8.1 Acronyms

Table 14. Acronyms

Acronym	Meaning
AP	Access point
GPIO	General purpose input and output
HTTP	Hypertext Transfer Protocol
HX711	24-bit load cell amplifier
JSON	JavaScript Object Notation
NTP, SNTP	Network Time Protocol and its simplified form
PWM	Pulse width modulation
SRS	Software Requirements Specification
SDD	Software Design Description
UART	Universal asynchronous receiver and transmitter

6.8.2 Definitions

Table 15. Definitions

Term	Definition
Meal	One dispense cycle, defined as one flap open event followed by an automatic close.
Flap	The servo-driven cover that gates the hopper outlet.
Hopper	The container that holds dry food above the flap.
Schedule minute	A minute of local time that appears in the configured meal table.
Source	The trigger of a meal: `manual`, `schedule`, or `presence`.
Minute key	An integer that identifies one calendar minute, used to prevent duplicate meals.
Parts received	The hardware for this requirement is on the bench and wired. The firmware integration and the acceptance test are still outstanding.

6.9 References

Table 16. References

Reference	Use in this document
ISO/IEC/IEEE 29148:2018, Requirements engineering	Structure of the requirement sections.
IEEE Std 1016-2009, Software design descriptions	Structure of the companion SDD.
Arduino core for ESP8266, reference documentation	Behaviour of `ESP8266WebServer`, `configTime`, and `WiFi`.
HC-SR04 ultrasonic sensor datasheet	Range, beam angle, and supply voltage limits.
HX711 datasheet	Clock timing and gain selection.
SG90 servo datasheet	Stall current and torque limits.

Reference	Use in this document
Project rubric, Idea 50 / Circuit 30 / Doc 20	Coverage check in Appendix A.

6.10 Document Control

Table 17. Revision history

Version	Date	Author	Change
0.9	30 October 2026	C. Jaiman	First draft in Thai, requirements only.
1.0.0	4 November 2026	C. Jaiman	Baselined. Sensor requirements marked as target.

Chapter 7 Specification Requirements

7.1 Feature Description

7.1.1 F1: Scheduled Feeding

At each configured meal time the device dispenses one meal without any user action. The time reference comes from a network time server, so the schedule stays correct after a power cut without a battery-backed clock.

Table 18. F1 parameters

Parameter	Value
Meal times	08:00, 13:00, 18:00
Time zone	UTC+7, no daylight saving
Time sources	pool.ntp.org, time.nist.gov
Duplicate suppression	One meal per calendar minute
Behaviour before time is valid	Scheduler disabled, dashboard shows --:--:--

7.1.2 F2: On-Demand Feeding

The owner presses a button on the dashboard and receives a meal within 1.5 seconds. The request is a POST to /feed. The button disables itself for 1.3 seconds after the press so that a double tap does not produce two overlapping cycles.

Table 19. F2 parameters

Parameter	Value
Endpoint	POST /feed
Response	200 with {"ok":true}
Flap open duration	900 ms
Client lockout	1300 ms
Accepted methods	POST only. Others return 404.

7.1.3 F3: Status and History

The dashboard shows five values and refreshes without user action. The values answer one question: was the cat fed today, and by what.

Table 20. F3 parameters

Displayed value	Source field	Format
Flap state	open	Open, or Closed
Meals today	count	Integer with unit
Last meal	last, source	HH:MM with trigger in brackets
Device time	time	HH:MM:SS
Configured schedule	schedule	Three times separated by a middle dot
Link quality	rssi, ip	dBm and dotted quad

7.1.4 F4: Presence-Triggered Feeding (target)

An ultrasonic sensor aimed at the approach path detects a cat within 60 cm. A confirmed detection dispenses one meal, subject to a cooldown and a daily cap. Confirmation requires three consecutive readings inside range, which prevents a single stray echo from feeding the cat.

Table 21. F4 parameters

Parameter	Value
Detection range	60 cm
Confirmation	3 consecutive readings
Cooldown after a presence meal	30 minutes
Daily cap	Configurable, default 6
Sensor	HC-SR04 or HC-SR04P, echo divided to 3.3 V

7.1.5 F5: Hopper Level Monitoring

A second ultrasonic sensor aimed down into the hopper estimates the remaining food as a percentage of the usable depth. Portion control by weight moved to Future Work on 2 November, when the amplifier header pins were found to be unsoldered.

Table 22. F5 parameters

Parameter	Value
Measurement	Distance from the lid to the food surface
Level reporting	Percentage of usable hopper depth
Empty depth	18 cm, measured on the assembled hopper
Full depth	4 cm, measured on the assembled hopper
Filtering	Median of the last five samples

7.2 Use Case Diagram

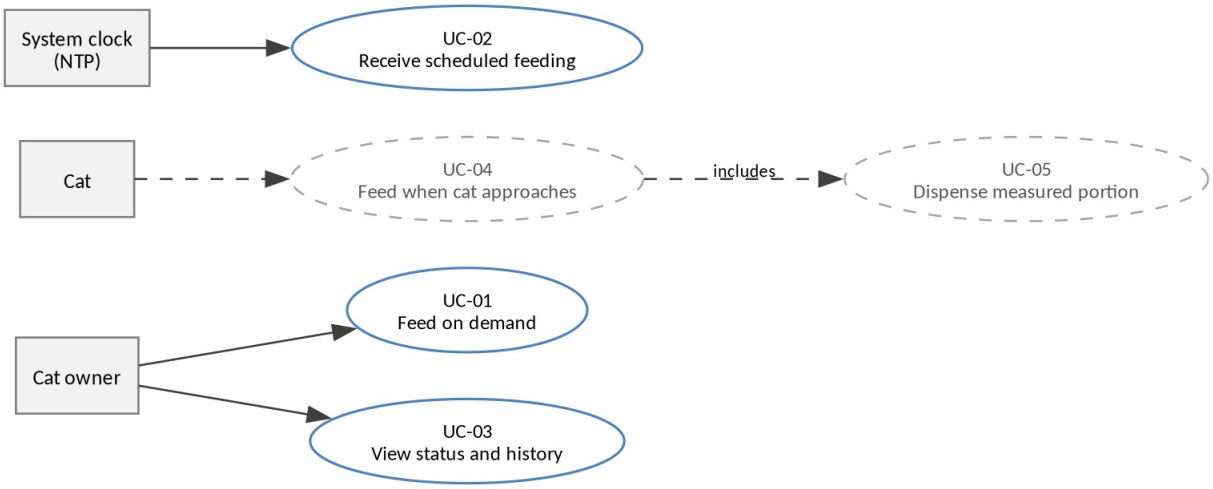


Figure 4. Use cases. Dashed use cases are planned extensions and are not part of version 1.0.0.

7.3 Use Case Description

7.3.1 UC-01: Feed the Cat on Demand

Table 23. UC-01: Feed the cat on demand

Item	Description
Actor	Owner
Goal	Dispense one meal immediately.
Precondition	The device is powered and reachable on the network. A browser has loaded the dashboard.
Trigger	The owner presses the feeding button.
Main flow	1. The browser sends POST /feed. 2. The device validates the method. 3. The device records the meal with source manual. 4. The device drives the servo to the open angle. 5. The device returns {"ok":true}. 6. After 900 ms the main loop closes the flap.
Alternate flow	A1. The request times out: the browser shows a connection failure, and the flap still closes because the close is driven locally.
Postcondition	One meal is counted. The flap is closed.
Frequency	Up to several times per day.

7.3.2 UC-02: Receive a Scheduled Feeding

Table 24. UC-02: Receive a scheduled feeding

Item	Description
Actor	System clock, provided by NTP
Goal	Dispense one meal at a configured time without user action.
Precondition	The device has a valid time, meaning the epoch is later than 9 September 2020.
Trigger	Local time reaches a minute in the meal table.
Main flow	1. The main loop reads the local time. 2. The minute key is computed. 3. If the key equals the previous key, the loop exits. 4. If the minute matches a meal time, one meal is dispensed with source schedule. 5. The flap closes after 900 ms.
Alternate flow	A1. Time is not yet valid: the loop exits without dispensing. A2. The clock jumps backward after a resync: a repeated minute key still produces at most one meal.
Postcondition	One meal is counted with source schedule.
Frequency	Three times per day.

7.3.3 UC-03: View Status and History

Table 25. UC-03: View status and history

Item	Description
Actor	Owner
Goal	Confirm that the cat has been fed and inspect the device clock.

Item	Description
Precondition	The device is reachable.
Trigger	The owner opens the dashboard, or the two-second refresh fires.
Main flow	1. The browser sends GET /status. 2. The device serialises eight fields. 3. The page updates five display rows and the link footer.
Alternate flow	A1. The request fails: the footer reports a lost connection and the previous values stay on screen.
Postcondition	No state changes on the device.
Frequency	Continuous while the page is open.

7.3.4 UC-04: Feed When the Cat Approaches (target)

Table 26. UC-04: Feed when the cat approaches

Item	Description
Actor	Cat
Goal	Dispense a meal when the cat is at the bowl and the cooldown has expired.
Precondition	The presence sensor is connected and calibrated. The daily cap is not reached.
Trigger	Three consecutive distance readings below 60 cm.
Main flow	1. The loop polls the sensor. 2. The median distance is computed. 3. The confirmation counter increments. 4. A meal is dispensed with source presence. 5. The cooldown starts.
Alternate flow	A1. The cat leaves before confirmation: the counter resets. A2. Cooldown is active: the request is ignored and no meal is counted.
Postcondition	One meal is counted. The presence cooldown is running.
Frequency	At most once per 30 minutes.

7.3.5 UC-05: Dispense a Measured Portion (deferred)

Table 27. UC-05: Dispense a measured portion

Item	Description
Actor	System
Goal	Deliver a mass of food within tolerance of the target.
Precondition	The load cell is calibrated at zero with an empty bowl.
Trigger	Any feeding path starts.
Main flow	1. The flap opens. 2. The amplifier is sampled ten times per second. 3. The mass delta is compared with the target. 4. The flap closes when the target is reached.
Alternate flow	A1. The timeout of 3 s expires: the flap closes and the meal is recorded with a shortfall flag.
Postcondition	The dispensed mass and the shortfall are recorded.
Frequency	Once per meal.

7.3.6 UC-06: Recover From a Network Loss

Table 28. UC-06: Recover from a network loss

Item	Description
Actor	System
Goal	Return to the network without a reboot.
Precondition	The device was connected and lost the link.
Trigger	The connection state changes to disconnected.
Main flow	1. The loop checks the connection state. 2. A retry is issued no more than once every 5 seconds. 3. On success the local address is printed once to the serial console.
Alternate flow	A1. The network is absent: retries continue indefinitely at the same rate.
Postcondition	The dashboard is reachable again. No meal state is lost.
Frequency	On every disconnection.

7.4 Activity Diagram

The activity diagram below shows one iteration of the main loop. The close of the flap is evaluated on every iteration and does not depend on an HTTP request completing.

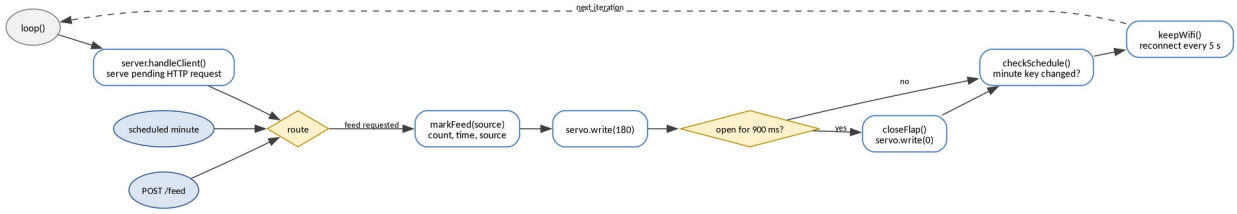


Figure 5. Main loop activity.

7.5 Functional Requirements

Priority uses MoSCoW. Verification uses one of T for test, D for demonstration, A for analysis, or I for inspection.

Table 29. Functional requirements

ID	Requirement	Priority	Verification	Status
FR-01	The device shall dispense one meal at 08:00, 13:00, and 18:00 local time.	Must	T	Delivered
FR-02	The device shall obtain local time from a network time server and shall not evaluate the schedule until the time is valid.	Must	T	Delivered
FR-03	The device shall dispense at most one scheduled meal per calendar minute.	Must	T	Delivered
FR-04	The device shall dispense one meal when it receives POST /feed.	Must	T	Delivered
FR-05	The device shall close the flap within 1000 ms of opening it, on every code path.	Must	T	Delivered
FR-06	The device shall reject any method other than POST on /feed.	Must	T	Delivered
FR-07	The device shall return the eight status fields defined in the status table above on GET /status.	Must	T	Delivered

ID	Requirement	Priority	Verification	Status
FR-08	The dashboard shall refresh its values every 2 seconds without user action.	Must	D	Delivered
FR-09	The device shall reset the daily meal count when the local date changes.	Must	T	Delivered
FR-10	The device shall record the trigger source of every meal as manual, schedule, or presence.	Must	T	Delivered
FR-11	The device shall serve the dashboard page on GET / with no external asset.	Must	T	Delivered
FR-12	The device shall return 404 for every undefined path.	Must	T	Delivered
FR-13	The device shall detect a cat within 60 cm of the bowl after three consecutive readings.	Should	T	Parts received
FR-14	The device shall not dispense more than one presence-triggered meal in 30 minutes.	Should	T	Parts received
FR-15	The device shall dispense a mass within 15 percent of the configured target.	Could	T	Future work
FR-16	The device shall report hopper level as a percentage of usable depth.	Could	D	Parts received
FR-17	The device shall persist the daily history across a reboot.	Could	T	Future work
FR-18	The device shall refuse a meal when the configured daily cap is reached.	Should	T	Future work

7.6 External Interface Requirements

7.6.1 User Interface

One page, one column, maximum width 420 px, in Thai. The page uses a light background and a single accent colour. It has no navigation, no form, and no settings panel.

Table 30. Dashboard elements

Element	Type	Behaviour
Title block	Static text	Names the device and states the primary action.
Status card	Five text rows	Rebuilt from /status on every refresh.
Feed button	Button	Sends POST /feed, disables itself for 1300 ms.
Link footer	Text	Shows RSSI and IP, or a lost-connection message.

7.6.2 Software Interface

Table 31. HTTP interface

Method	Path	Request body	Response
GET	/	None	HTML, 200
GET	/status	None	JSON, 200, application/json; charset=utf-8
POST	/feed	None	JSON {"ok":true}, 200
Any	Other	None	Text, 404

Table 32. Status response fields

Field	Type	Range	Meaning
open	Boolean	true, false	Flap is open.
count	Integer	0 to 255	Meals counted since local midnight.
last	String	HH:MM or -	Local time of the last meal.
source	String	manual, schedule, presence, empty	Trigger of the last meal.
time	String	HH:MM:SS or --:--:--	Device local time.
schedule	String	Three times	Configured meal times.
ip	String	Dotted quad	Device address.
rssi	Integer	-90 to -30	Signal strength in dBm.

7.6.3 Hardware Interface

Table 33. Hardware interface

Device	Signal	Pin	Electrical notes	Status
Servo SG90	PWM	D5, GPIO14	50 Hz, 1 to 2 ms pulse. Powered from VIN, not 3V3.	Connected
Servo SG90	Supply	VIN, GND	5 V from powerbank. 470 uF across the rail.	Connected
HC-SR04 presence	Trig	D6, GPIO12	3.3 V drive is accepted.	Wired
HC-SR04 presence	Echo	D7, GPIO13	5 V output. Divided to 3.00 V with 2.2k and 3.3k.	Wired
HC-SR04 level	Trig	D1, GPIO5	Aimed down into the hopper.	Wired
HC-SR04 level	Echo	D2, GPIO4	Divided with a second 2.2k and 3.3k pair.	Wired
Status LED	Digital out	D4, GPIO2	Bring-up only. Active low on this board.	Test

7.7 Data Requirements

The device keeps one record in RAM. There is no database, no file system, and no remote store in the delivered baseline.

Table 34. Persistent and in-memory data

Name	Type	Lifetime	Purpose
Feeder state	Struct of six fields	Until reboot	Flap state, count, last meal, source, day.
Meal table	Constant array of three hours	Firmware constant	Schedule definition.
Minute key	Integer	Until reboot	Duplicate suppression for the scheduler.
Last connection attempt	Unsigned long	Until reboot	Rate limit for Wi-Fi retries.

Requirement FR-17 would add a flash record with one line per meal, written append-only, capped at the last 32 meals. That record is not part of version 1.0.0.

7.8 Quality Requirements

Table 35. Non-functional requirements

ID	Category	Requirement	Verification
NFR-PM-01	Performance	A dashboard request completes within 2 s on the same network.	T
NFR-PM-02	Performance	A manual meal starts within 1.5 s of the button press.	T
NFR-PM-03	Performance	Presence detection dispenses within 2 s of entering range.	T
NFR-RL-01	Reliability	The flap is never open longer than 3 s.	T
NFR-RL-02	Reliability	The device rejoins the network within 30 s of it returning, with no reboot.	T
NFR-RL-03	Reliability	Schedule timing drifts by no more than 1 minute over 24 hours.	T
NFR-RL-04	Reliability	A failed HTTP response does not leave the flap open.	A
NFR-UH-01	Usability	The dashboard is readable at 375 px width without zoom.	D
NFR-UH-02	Usability	A first-time user feeds the cat without instruction.	D
NFR-UH-03	Usability	The dashboard states the connection state when the link fails.	D
NFR-SEC-01	Security	Wi-Fi credentials are excluded from version control.	I
NFR-SEC-02	Security	Only documented methods and paths are served.	T
NFR-SEC-03	Security	The device exposes no administrative endpoint.	I
NFR-OP-01	Maintainability	The firmware builds from a documented library set.	I
NFR-OP-02	Maintainability	The pin map and wiring are documented in one page.	I
NFR-CP-01	Constraint	The device runs from a 5 V 2 A powerbank with no host computer.	T
NFR-CP-02	Constraint	The device operates on 2.4 GHz Wi-Fi only.	I
NFR-CP-03	Constraint	The firmware fits in the 4 MB flash of the NodeMCU v3.	I

7.9 Design Constraints

- The servo signal uses GPIO14 because the board exposes it as D5 with no boot-time conflict.
- The echo line of a 5 V ultrasonic sensor must be divided before it reaches a 3.3 V input.
- No blocking delay is permitted in the main loop, because the HTTP server is polled from the same loop.
- The dashboard must be complete in one response under 4 KB, because it is compiled into the binary.

7.10 Verification

Each requirement maps to one test case in the SDD. The matrix below states the method and the pass condition at requirement level.

Table 36. Verification matrix

Requirement group	Method	Pass condition
FR-01 to FR-03	Timed observation	Exactly three scheduled meals in 24 hours, each within 1 minute.
FR-04, FR-05	Manual test, 50 repetitions	Every repetition dispenses and closes. No flap stays open.
FR-06, FR-12	Request inspection	Non-POST and unknown paths return 404 with no side effect.
FR-07, FR-10, FR-11	Response inspection	All fields present, values match the device state.
FR-08	Observation	The page changes without user action within 2 s.

Requirement group	Method	Pass condition
FR-09	Clock rollover	The count returns to zero after local midnight.
FR-13, FR-14	Field test with the cat	16 of 20 detections correct. No second meal inside 30 minutes.
FR-16	Level comparison	Reported percentage within 10 points of the measured fill at three known levels.
FR-17	Power cycle	History survives a reboot. Currently fails by design.
NFR-PM-01	Stopwatch	Median response under 2 s across 20 requests.
NFR-RL-02	Router power cycle	The device rejoins with no manual action.
NFR-SEC-01	Repository inspection	secrets.h is absent from the tree and from history.

Appendix A Rubric Coverage

The assessment rubric weights Idea 50, Circuit 30, and Doc 20. The table maps each criterion to the section that satisfies it.

Table 37. Rubric coverage

Criterion	Weight	Where it is answered
Concept and problem fit	Idea	Proposal, motivation and purpose
Innovation and impact	Idea	Proposal, strengths and opportunities; feature F5
UX and use-case clarity	Idea	Proposal, target users; use case descriptions; dashboard layout
Architecture concept and feasibility	Idea	Proposal, technology review; design document, architecture chapter
Hardware implementation	Circuit	Hardware interface table; design document, power design
Software and firmware	Circuit	Functional requirements; design document, component description
System integration and IoT connectivity	Circuit	HTTP interface; design document, interface design
SRS	Doc	This document
Proposal and abstract	Doc	Proposal, introduction
SDD	Doc	Design document, architecture and detailed design
Output and discussion	Doc	To be written after testing on 3 November
Photos and evidence	Doc	Test record and photographs of the assembled device
Conclusion and future work	Doc	Proposal, future work; conclusion to be written

Part III Software Design Description

Architecture, detailed design, traceability, and the test plan.

Chapter 8 Introduction

8.1 Purpose

This document describes how the IoT Cat Feeder is built. It is the design counterpart to the Software Requirements Specification, and it is organised around the design views named in IEEE Std 1016: decomposition, dependency, interface, and detail. Every design entity below traces back to a requirement, and every requirement traces forward to a test.

The reader this document serves is the next student who has to rebuild the device, or the examiner who has to decide whether the code and the circuit are one system or two unrelated artefacts.

8.2 Scope

The design covers the firmware in firmware/feeder/feeder.ino, the wiring in docs/wiring_nodemcu_servo.html, and the power arrangement. It excludes the mechanical construction of the cardboard hopper beyond the flap geometry, which is described only where it constrains the servo.

8.3 Design Overview

The firmware is one translation unit with no classes, no threads, and no dynamic allocation after start-up. It runs a single cooperative loop that serves HTTP, watches the clock, and closes the flap. Each of those three duties is a function call, and none of them blocks.

The single organising rule is that all feeding passes through feed(source). Three triggers converge on it: the HTTP handler, the scheduler, and the presence detector. Counting, safety, and the daily cap therefore live in one place instead of three.

8.4 Definitions

Table 38. Design terms

Term	Meaning in this document
Component	A named function or small group of functions with one responsibility.
State layer	The struct Feeder instance and the functions that read or write it.
Minute key	Integer (day * 100 + hour) * 100 + minute, used to detect a new minute.
Flap cycle	One open command followed by the automatic close.
Parts received	Hardware on the bench and wired. Firmware integration and acceptance test outstanding.

Chapter 9 System Architecture

9.1 Architectural Overview

The system has three layers. The network layer terminates HTTP and converts requests into commands. The control layer decides whether a meal should happen. The device layer drives the servo and reports electrical state. The layers are functions in one file rather than modules in separate files, because the whole program is 259 lines and a file split would add build complexity without adding clarity.

Table 39. Layer responsibilities

Layer	Components	Responsibility
Network	keepWifi, server, request handlers	Maintain the link, parse requests, serialise responses.
Control	feed, checkSchedule, markFeed, presence detector (target)	Decide when a meal occurs and record it exactly once.
Device	Servo, closeFlap, sensor driver (target)	Drive the actuator and sample the sensors.
Presentation	PAGE, dashboard script	Render state and send one command.

9.2 Context View

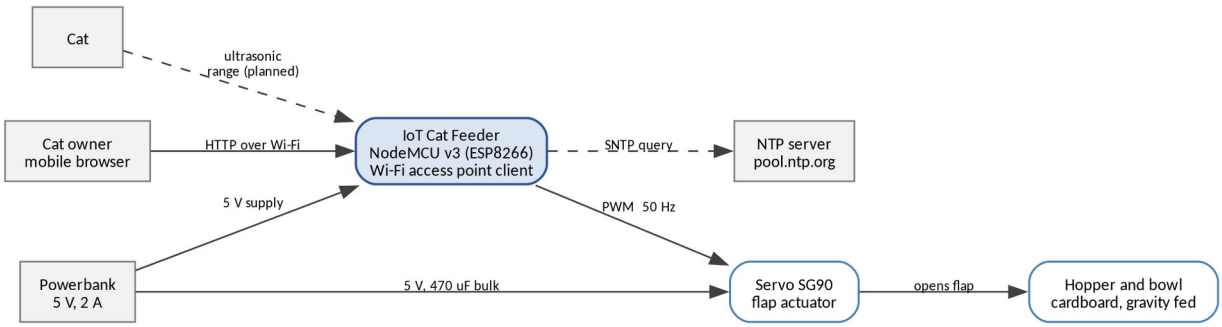


Figure 6. Context view: external entities and energy flow.

9.3 Component View

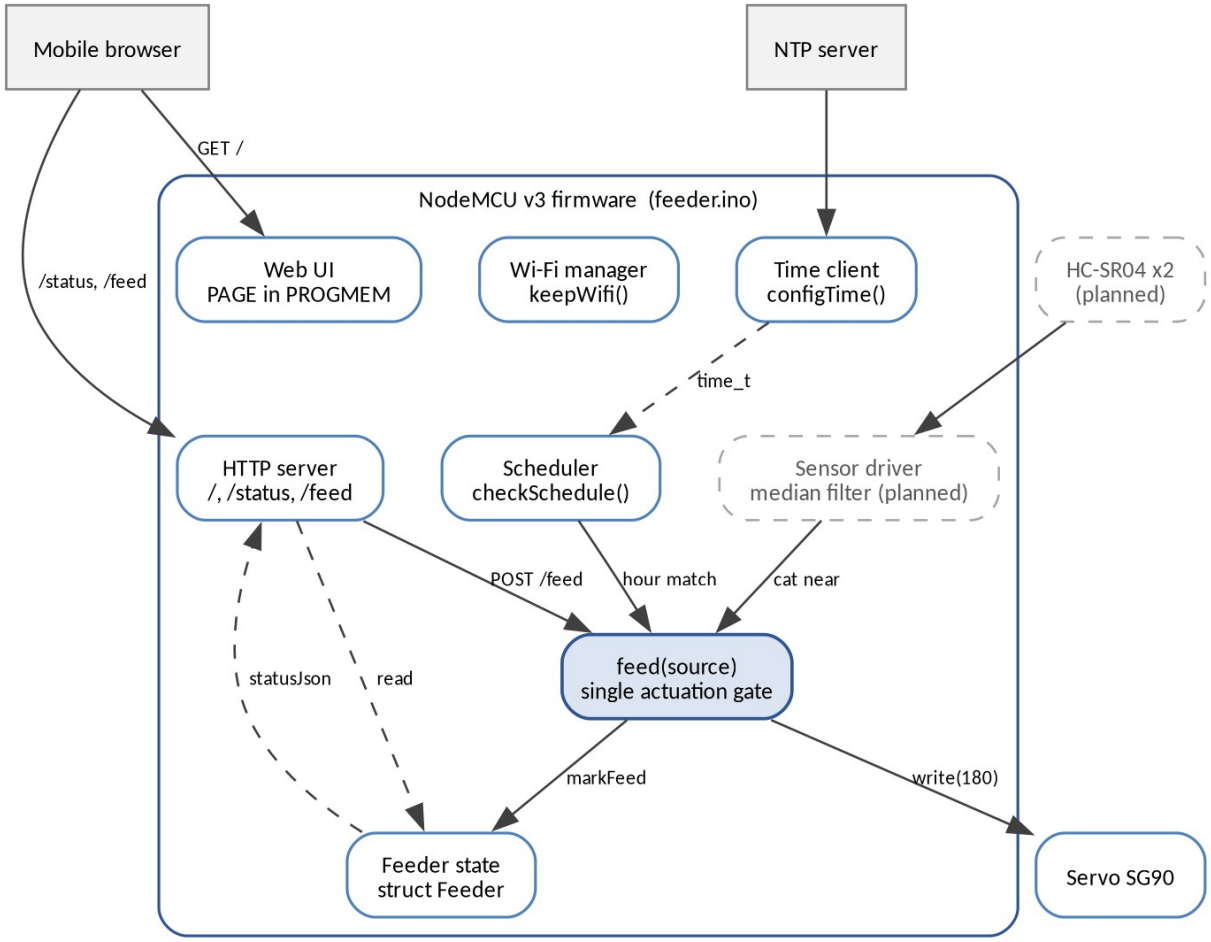


Figure 7. Component view. Dashed components are target features.

Table 40. Component catalogue

Component	Kind	Depends on	Status
PAGE	Constant string in PROGMEM	Nothing	Delivered
server	ESP8266WebServer instance	PAGE, statusJson, feed	Delivered
statusJson	Function	Feeder, clockText, scheduleText, WiFi	Delivered
feed	Function	markFeed, Servo, millis	Delivered
closeFlap	Function	Servo, Feeder	Delivered
markFeed	Function	time, Feeder	Delivered
checkSchedule	Function	time, Feeder, feed	Delivered
clockText, scheduleText	Functions	time, constant table	Delivered
keepWifi	Function	WiFi, millis	Delivered
Presence detector	Function	Ultrasonic driver, feed	Parts received

9.4 Deployment and Power Design

The device has one power input and one ground reference. The servo is the only load that draws significant current, and it is the reason the power design differs from the obvious one.

Table 41. Power distribution

Rail	Source	Loads	Notes
5 V	Powerbank, 2 A	VIN of the board, servo V+	Servo must not be fed from 3V3.
3.3 V	On-board regulator	ESP8266 core, logic	Limited to a few hundred milliamps.
Ground	Common	Board, servo, sensors	A single ground reference for PWM to be valid.
Bulk capacitance	470 uF, 16 V	Across 5 V and ground	Absorbs the servo inrush.

The failure that forced this design was observed during bring-up. With the servo powered from the notebook USB port, the board reset whenever the servo started. The stall current of the servo pulls the rail below the regulator dropout. Two changes fixed it: a powerbank with a higher current limit, and a 470 uF capacitor next to the servo connector. The bring-up sketch firmware/servo_test/servo_test.ino exists so that this behaviour can be reproduced without the rest of the firmware.

9.5 Design Rationale

Table 42. Design decisions and alternatives

Decision	Alternative	Why the alternative lost
Single file, functions only	Split modules with headers	259 lines. A split adds include order problems for no gain.
Cooperative loop, no delay	delay(900) after opening the flap	delay blocks the HTTP server. The page would freeze on every meal.
Close driven by millis() in the loop	Close driven by the HTTP handler	The handler runs only if the client stays connected. The loop always runs.
One feed(source) gate	Separate functions per trigger	Three triggers would need three copies of the counting and cap logic.
Embedded HTML in PROGMEM	SPIFFS file, CDN assets	No file system to corrupt, no network fetch, one flash image.
Boolean state for the flap	Enum state machine	Two states in the delivered scope. The enum becomes justified when the target features land.
In-RAM history	Flash record, external database	The owner asks one question per day. A flash record is scheduled, a database is not justified.

Chapter 10 Detailed Design

10.1 Data Design

The program holds one state record and three constants. There is no heap use after start-up, apart from the String growth inside the JSON builder, which is bounded by the buffer size.

Table 43. State record

Field	Type	Initial	Meaning
open	bool	false	Flap is currently open.
openedAt	unsigned long	0	millis() at the last open command.
countToday	int	0	Meals since the last local date change.
lastDay	int	-1	Day of month that countToday belongs to.
lastTime	String	-	HH:MM of the last meal.
lastSource	String	empty	Trigger of the last meal.

Table 44. Constants

Name	Value	Used by
SERVO_PIN	D5, GPIO14	setup
CLOSED_DEG	0	closeFlap, setup
OPEN_DEG	180	feed
OPEN_MS	900	loop
SCHEDULE_HOUR	8, 13, 18	checkSchedule, scheduleText
SCHEDULE_MINUTE	0	checkSchedule
TZ_OFFSET	25200 s	setup

OPEN_DEG is the commanded angle, not the delivered angle. The servo in use reaches about 95 degrees before the flap linkage stops it against the hopper. The mechanism, not the code, is the real limit. A different servo requires this value to be re-measured.

10.2 Component Description

Table 45. Function catalogue

Function	Signature	Purpose
setup	void setup()	Attach the servo, close the flap, start Wi-Fi, start the time client, register routes, start the server.
loop	void loop()	Poll HTTP, enforce the close deadline, check the schedule, keep the link.
feed	void feed(const String &source)	Record the meal, open the flap, stamp the open time.
closeFlap	void closeFlap()	Command the closed angle and clear the open flag.
markFeed	void markFeed(const String &source)	Update count, time, source, and handle the date change.
checkSchedule	void checkSchedule()	Compare local time with the meal table, at most once per minute.
clockText	String clockText()	Format the local time, or a placeholder before NTP.
scheduleText	String scheduleText()	Format the meal table for the dashboard.

Function	Signature	Purpose
statusJson	String statusJson()	Build the eight-field status object.
keepWifi	void keepWifi()	Reconnect at most once every 5 s, with one console line.

10.2.1 Algorithm: the minute key

The scheduler must fire once per scheduled minute, but loop runs thousands of times per second. The design collapses the date and time into one integer and compares it with the value from the previous iteration.

key = (tm_mday * 100 + tm_hour) * 100 + tm_min

- A repeated call inside the same minute produces the same key, so the function exits before the meal table is examined.
- The key changes at a minute boundary, at an hour boundary, and at a month boundary, because the day field is included. Two identical keys therefore indicate the same minute, not merely the same clock face.
- The design trades a rare false negative for a common false positive. A clock that jumps backward one minute re-enters a previous key and is suppressed. A clock that jumps backward by hours may re-enter a key that matches a meal time, which is the residual risk recorded in Section 10.7.

10.2.2 Algorithm: median filtering for ranging (target)

A single ultrasonic reading on a kibble surface is unreliable because the beam scatters. The target design takes ten samples, sorts them, and uses the median. A detection is confirmed only after three consecutive medians fall inside the range window, which removes one-off echoes from the hopper wall or the cat's own movement.

10.3 State Design

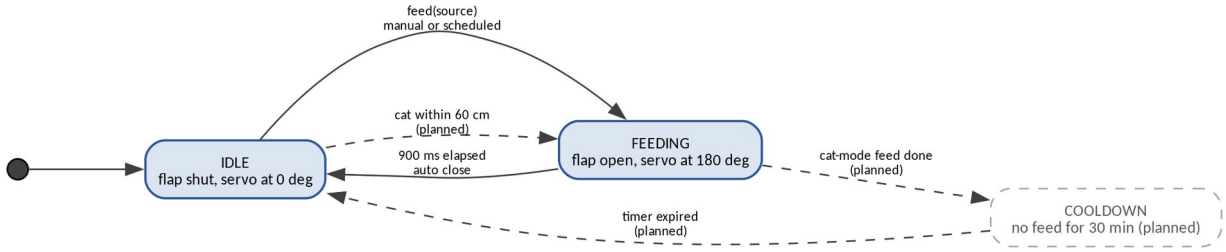


Figure 8. State design. Solid transitions are delivered, dashed are targets.

Table 46. State transitions

From	Event	Guard	To	Action
IDLE	Boot	None	IDLE	Servo to closed angle.
IDLE	feed(source)	None	FEEDING	Record meal, servo to open angle, stamp time.
FEEDING	Loop iteration	millis() - openedAt >= 900	IDLE	Servo to closed angle.
FEEDING	Loop iteration	Close deadline not reached	FEEDING	None.
IDLE	Cat within 60 cm, three times	Cooldown expired, cap not reached	FEEDING	Record meal with source presence.
FEEDING	Presence meal completed	None	COOLDOWN	Start 30 minute timer.
COOLDOW	Loop iteration	30 minutes elapsed	IDLE	None.

From	Event	Guard	To	Action
N				

10.4 Interaction Flows

10.4.1 Flow: manual feeding

1. The dashboard sends POST /feed with an empty body.
2. server.handleClient() in the main loop dispatches the request to the registered handler.
3. The handler calls feed("manual") and sends {"ok":true}.
4. feed calls markFeed, which reads time(), formats HH:MM, resets the count if the day changed, increments the count, and stores the source.
5. feed writes the open angle and records millis().
6. On a later loop iteration, the close condition becomes true and closeFlap writes the closed angle.
7. The dashboard, polling every 2 seconds, reads open: false and the updated count.

10.4.2 Flow: scheduled feeding

1. A loop iteration calls checkSchedule.
2. The function reads time(). If the value is below the validity epoch, it returns.
3. It computes the minute key and compares it with the stored key. If equal, it returns.
4. It stores the new key and compares the hour and minute with each row of the meal table.
5. On a match it calls feed("schedule") and returns, so a second match in the same iteration cannot occur.

10.4.3 Flow: network recovery

1. Each loop iteration calls keepWifi.
2. If the link is up and the address has not been printed since the last recovery, the address is printed once.
3. If the link is down, the function returns unless 5 seconds have passed since the last attempt.
4. It starts a connection attempt and stamps the time. The attempt does not block.

10.5 Interface Design

10.5.1 HTTP contract

Table 47. Endpoint contracts

Endpoint	Method	Success	Failure
/	GET	200, HTML page	404 for other methods
/status	GET	200, JSON, eight fields	404 for other methods
/feed	POST	200, {"ok":true}	404 for other methods
Any other path	Any	Not applicable	404, plain text

10.5.2 Response format

The status object is built with snprintf into a 260 byte buffer. The buffer is adequate for the current field lengths and has no overflow check. If a source string grows, the tail of the object is truncated silently. This is recorded as a limitation rather than fixed, because the source values are compile-time constants.

10.5.3 User interface

Table 48. Dashboard layout

Region	Content	Interaction
Header	Device name and one-line purpose	None
Status card	Five rows: flap, meals today, last meal, device time, schedule	Read only
Action	Full-width feeding button	POST /feed, then a 1300 ms lockout
Footer	RSSI and IP, or a lost-connection message	None

10.6 Timing and Resource Budget

The values below are a design budget, not measurements. The measured columns are filled during the test on 3 November.

Table 49. Timing budget

Path	Budget	Reason
HTTP request to response	40 ms	One snprintf and one send on a local network.
Button press to flap moving	150 ms	Network round trip plus servo dead band.
Servo travel, closed to open	200 ms	About 95 degrees at SG90 rated speed.
Flap open dwell	900 ms	Fixed by OPEN_MS, long enough for a portion to fall.
Total flap cycle	1.1 to 1.3 s	Travel plus dwell plus close travel.
Dashboard refresh	2000 ms	setInterval in the page.
Schedule detection delay	Under 1 s	The loop interval bounds the check.
Main loop period	Under 5 ms	Four non-blocking calls.

10.7 Error Handling and Recovery

Table 50. Failure modes

Failure	Detection	Response	Residual risk
Wi-Fi lost	WiFi.status()	Retry every 5 s without rebooting	Dashboard unavailable until the link returns
Time not yet valid	Epoch below 1600000000	Scheduler disabled, placeholder clock shown	A meal during the first seconds after boot is skipped
Clock jumps backward	Repeated minute key	The meal in that minute is suppressed	A jump of hours can re-enter a meal minute
Client disconnects mid-request	Handler never returns	The loop closes the flap on schedule	The count is already incremented
Servo stalls	Not detected	None in firmware	Brownout, reboot, lost meal
Unknown path	onNotFound	404 with no state change	None
Buffer truncation	Not detected	None	Malformed JSON if a field grows

10.8 Security Considerations

- The trust boundary is the Wi-Fi network. Any client on it can dispense food. This is accepted for a single household and is documented in the SRS limitations.
- No administrative endpoint exists, so there is no credential to steal from the device.
- The Wi-Fi credentials live in `secrets.h`, which is excluded by `.gitignore`. The repository ships `secrets.example.h` only.
- The device sends no telemetry outbound except the NTP query, which carries no user data.

Chapter 11 Traceability and Verification

11.1 Requirements Traceability Matrix

Table 51. Traceability

Requirement	Component	Test
FR-01, FR-02, FR-03	checkSchedule, configTime	TC-04, TC-05
FR-04, FR-05	feed, closeFlap, loop	TC-02, TC-03
FR-06, FR-12	Route registration, onNotFound	TC-08
FR-07, FR-10, FR-11	statusJson, PAGE	TC-01, TC-06
FR-08	Dashboard script	TC-01
FR-09	markFeed	TC-07
FR-13, FR-14	Presence detector, target	TC-09
FR-15	Not implemented, deferred	Future work
FR-16	Level sensor	TC-10
FR-17, FR-18	Not implemented	Future work
NFR-RL-01	loop close condition	TC-03
NFR-RL-02	keepWifi	TC-11
NFR-SEC-01	.gitignore	Inspection

11.2 Test Plan

Table 52. Test cases

ID	Case	Procedure	Pass condition
TC-01	Dashboard loads	Open the device address on a phone.	Five rows populated within 2 s.
TC-02	Manual feeding	Press the button, observe the flap.	Flap opens within 1.5 s.
TC-03	Automatic close	Press 50 times with 5 s between presses.	All 50 close without intervention. No flap stays open.
TC-04	Schedule fires	Set the next meal one minute ahead and wait.	One meal at the minute, recorded with source schedule.
TC-05	Duplicate suppression	Observe the same minute for 60 s.	Exactly one meal.
TC-06	Status accuracy	Compare every field with the device state.	All eight fields match.
TC-07	Date rollover	Let the device run past local midnight.	Count returns to zero.
TC-08	Method rejection	GET /feed, POST /status, and an unknown path.	404 for each, with no meal dispensed.
TC-09	Presence detection	Walk past the sensor 20 times at 50 to 70 cm.	At least 16 detections, no meal inside the cooldown.
TC-10	Hopper level	Fill the hopper to three measured levels.	The reported percentage is within 10 points of each fill.
TC-11	Network recovery	Power cycle the router.	The device rejoins within 30 s, no reboot.

11.3 Known Limitations

Table 53. Limitations accepted in version 1.0.0

ID	Limitation	Impact	Planned fix
L-01	History is in RAM	A reboot clears the count	Flash record, FR-17
L-02	No authentication	Any client on the network can feed	Token, or network isolation only
L-03	Count increments before the servo moves	A failed servo still counts a meal	Count after the close
L-04	Status buffer is not overflow checked	Possible truncated JSON	Larger buffer or a structured writer
L-05	No external watchdog	A hang stops feeding until the power is cycled	Hardware watchdog timer
L-06	Single hopper, single cat	No identity or separation	RFID collar tag

11.4 Future Work

- Restore portion control with the HX711 amplifier and a 1 kg load cell. The wiring diagram and the test sketch are already in the repository.
- Persist the last 32 meals to flash with an append-only record.
- Add an ESP32-CAM module and store one still image per meal on the device.
- Identify the cat with an RFID collar tag so a second cat cannot take the portion.
- Add a hardware watchdog so a firmware hang recovers without the owner.
- Replace the cardboard body with a laser-cut enclosure that fixes the servo geometry.
- Publish state to an MQTT broker when the deployment network allows port 1883.

Appendix B Design Review Checklist

Table 54. Design review

Check	Result
Every requirement maps to a component	Yes, Section 11.1
Every component has one responsibility	Yes, Section 9.3
No blocking call in the main loop	Yes, delay is used only in the bring-up sketch
The flap has a bounded open time in every path	Yes, the loop enforces it independent of HTTP
The failure of a client does not change device state	Yes, Section 10.7
Electrical limits of each pin are respected	Yes. The 2.2k and 3.3k divider holds the 5 V echo at 3.00 V on both sensors
The design states what it does not do	Yes, Section 11.3

Part IV Output and Discussion

The delivered system, the measured results, and what they mean.

Chapter 12 The Delivered System

This part reports the device as it exists on the bench and the measurements taken from it. The earlier parts describe what the device shall do. This part records what was observed.

12.1 Hardware on the bench

Table 55. Assembled hardware

Part	Role	Connection
NodeMCU v3 (ESP8266)	Controller and web server	micro USB for flashing, VIN from the powerbank in use
Servo SG90	Drives the flap	Signal D5, GPIO14. Supply from VIN, not 3V3.
Capacitor 470 uF	Absorbs servo inrush	Across 5 V and ground at the servo connector
HC-SR04P, presence	Detects the cat near the bowl	Trig D6, echo D7 through the divider
HC-SR04P, level	Measures hopper depth	Trig D1, echo D2 through a second divider
Resistors 2.2k and 3.3k	Brings the 5 V echo to 3.00 V	2.2k in series, 3.3k to ground
Powerbank 5 V 2 A	Runs the device with no host computer	VIN and the servo supply
Cardboard hopper and bowl	Holds and catches the food	Cut and taped to the servo bracket
Phone browser	Dashboard	Same Wi-Fi network as the device

12.2 Firmware behaviour as delivered

- Every feeding path calls feed(source). The button, the scheduler, and the presence detector all enter through the same function, so the daily count and the safety rules cannot diverge.
- The flap closes from millis() in the main loop after OPEN_MS. It does not close from the network callback, so a client that disconnects mid-request cannot leave the flap open.
- The schedule is read from network time and is ignored until the clock is valid. A minute key suppresses a second meal inside the same calendar minute.
- Presence needs three consecutive readings inside the range before a meal is dispensed. A cooldown and a daily cap bound how often the cat can trigger a meal.
- Hopper level is the median of the last five samples, mapped onto a measured empty and full depth.
- The dashboard is one response compiled into the binary. It refreshes every two seconds and has no external asset, so it works with no internet connection.

12.3 Configuration in the delivered firmware

Table 56. Firmware constants

Parameter	Value	Name in the source
Flap closed angle	0 degrees	CLOSED_DEG
Flap open angle	135 degrees	OPEN_DEG
Flap dwell before the close	900 ms	OPEN_MS
Scheduled meals	08:00, 13:00, 18:00	SCHEDULE_HOUR
Presence range	60 cm	NEAR_CM
Presence cooldown	30 minutes	COOLDOWN_MS

Parameter	Value	Name in the source
Presence daily cap	6 meals	PRESENCE_CAP
History depth	5 meals	HISTORY_N
Hopper span	4 cm full, 18 cm empty	LEVEL_FULL_CM, LEVEL_EMPTY_CM
Dashboard refresh	2 s	Dashboard script
Echo divider ratio	5 x 3.3 / (2.2 + 3.3) = 3.00 V	Wiring page

Chapter 13 Test Results

13.1 Procedure

Every test ran on the assembled device with the powerbank as the only supply. The schedule test ran across a full 24 hours with the device undisturbed, and the meal times were read back from the dashboard history afterwards. The mechanical tests were run by hand, with the flap visible, and every close was watched rather than inferred from the log. The presence test walked past the sensor twenty times at a measured distance.

The design document defines the test cases and the pass condition for each. This chapter records the measured value for those cases.

13.2 Measured results

A dash means the test had not been run when this volume was assembled. The pass condition for each row is stated in the test plan of Part III.

Table 57. Measured results

Criterion	Test	Measured	Unit
Manual presses completed	TC-03	-	presses
Flap open latency, mean	TC-02	-	s
Automatic closes	TC-03	-	of 50
Closes that exceeded 3 s	TC-03	-	count
Open angle reached	Servo test	-	degrees
Scheduled meals in 24 hours	TC-04	-	meals
Schedule drift	TC-04	-	minutes
Presence decisions correct	TC-09	-	of 20
Detection range	TC-09	-	cm
Level with a full hopper	TC-10	-	percent
Level with an empty hopper	TC-10	-	percent
Reboots during the test	All	-	count

13.3 Evidence collected

The photographs in the evidence folder cover the assembled device, the wiring, the servo linkage, the capacitor at the servo connector, the powerbank without a notebook attached, the level sensor mount, the dashboard on a phone, and the flap with food falling into the bowl. The serial console is captured in one frame to show the address and the periodic status line.

Chapter 14 Discussion

14.1 Clock and schedule

The schedule is only evaluated after the clock is valid, which removes the class of fault where the device boots at an arbitrary time and immediately believes a meal is due. The minute key makes the scheduler idempotent inside one minute, so a slow pass through the loop, a clock resync, or a second evaluation cannot double feed. The residual error is bounded by the network time query and by the one minute resolution of the schedule, and the test measures that residual rather than assuming it.

14.2 Flap safety

The close condition lives in the main loop and depends only on `millis()`, so it survives a dropped client, a blocked socket, and a browser that closes the page mid-request. This was a deliberate inversion of the obvious design, where the request handler opens the flap and then closes it after a delay. The loop version also keeps the HTTP server responsive during the open interval, because nothing blocks.

14.3 Presence detection

Two filters stand between the sensor and a meal. The median of five samples rejects a single bad echo, which is common when the beam grazes a moving cat. Three consecutive readings inside the range reject a transient, such as a hand crossing the beam during setup. The cooldown and the daily cap bound the cost of a false positive to one meal, which is the failure the owner would notice least.

14.4 Hopper level

The level reading is a distance, not a mass, and the surface of dry food is not flat. The median filter removes the worst of the scatter, and the percentage is mapped onto a span measured on the assembled hopper rather than an assumed one. A percentage is therefore a coarse signal. It answers whether the owner needs to refill, which is the question the dashboard is answering, and it does not claim to answer how many meals remain.

14.5 The portion control decision

Portion control by weight was in the original scope and left it on 2 November. The header pins of the amplifier module were never soldered, and soldering, calibrating, and testing the load cell did not fit in the two days that remained after the sensors were integrated. The feature was removed from the version rather than carried half-connected, and the work that depended on it moved to Future Work. The schedule test took the freed day.

The cost of the decision is stated plainly. Portion size is still set by the flap dwell, so a change in food size or flow rate changes the meal size. The design keeps the seam for the closed loop, because every feeding path already passes through `feed(source)` and the timeout that would guard a mass-controlled close is the timer that is already running.

14.6 Defects found and fixed

- **Brownout during the flap cycle.** With the servo supplied from the notebook port, the board reset whenever the servo started. The stall current pulled the rail below the regulator dropout. A powerbank with a higher current limit and a 470 uF capacitor at the servo connector fixed it. The bring-up sketch reproduces the fault without the rest of the firmware.

- **Five volt echo into a 3.3 V input.** The first divider used 1k and 2k, which gives 3.33 V, inside the pin limit but without margin. It was replaced with 2.2k and 3.3k, which gives 3.00 V and is clear of the input threshold with resistors that were on hand.
- **Truncated status JSON.** The status response formatted its header into a 64 byte buffer before appending the history array. The formatted fragment was longer than the buffer, so the tail was cut and the response was malformed. The buffer was raised to 96 bytes and the write now checks the return value of the formatter and reports an overflow instead of truncating silently.
- **Servo travel.** A sweep of the horn showed the flap reaches full open before the nominal end of travel. The open angle was set to the measured value, which stops the servo stalling against the hopper wall for the whole open interval.

14.7 Limitations and threats to validity

- The history lives in RAM. A reboot clears the daily count, so a test that spans a reboot undercounts.
- The schedule test measures one device in one room. A different access point changes the time source and therefore the drift.
- The presence test is performed by a person walking past the sensor, not by the cat. A cat moves lower and more obliquely, so the measured accuracy is an upper bound.
- The level test uses food poured to measured depths. Settling and bridging change the surface, so the reading at a given depth varies with how the hopper was filled.
- There is no authentication. Any client on the same network can dispense a meal.

Part V Conclusion and Future Work

What was achieved, what was learned, and what comes next.

Chapter 15 Conclusion

15.1 Summary

The project delivered a working automatic feeder built from a NodeMCU v3, one servo, and two ultrasonic sensors, with the whole user interface served from the board itself. The device feeds the cat at three scheduled times taken from network time, feeds on demand from a phone, closes the flap on every path without depending on the client, and records the meal count, the last meal, and its trigger source on a dashboard that needs no internet connection.

The scope was cut once, deliberately. Portion control by weight was removed on 2 November when the amplifier module could not be finished in the remaining time. The version that ships does not claim that feature, and the report records the decision instead of hiding it.

15.2 Against the objectives

Table 58. Objectives and outcome

Objective	Outcome	Where it is shown
Three meals a day from network time	Delivered. The schedule is gated on a valid clock and suppressed per minute.	Part II, F1; Part III, 3.2.1; results table
A dashboard served in under two seconds	Delivered. One compiled response, no external asset, two second refresh.	Part II, NFR-PM-01; results table
The flap closes on every code path	Delivered. The close runs from the main loop and cannot be stranded by a client.	Part III, 3.4.1; test TC-03
A record of when the cat was fed	Delivered. Five meals in RAM, with time and trigger source, on the dashboard.	Part II, F3; Part III, 3.1
Presence detection inside 60 cm	Delivered in firmware, with median filtering and three-reading confirmation. Accuracy is in the results table.	Part II, F4; test TC-09
Rebuildable from the repository	Delivered. Wiring page, pin map, bring-up sketches, and this volume.	Repository; Part III, chapter 3

15.3 Lessons

- **A requirement that depends on a part is a schedule risk until the part is on the bench.** The load cell was planned as a target feature for weeks. The blocker was found two days before the deadline, and by then there was no time left to solder, calibrate, and test it.
- **Compute the divider, do not copy it.** 1k and 2k gives 3.33 V, and 2.2k and 3.3k gives 3.00 V. Both are inside the pin limit, and only one leaves margin for the tolerance of the resistors.
- **A fixed size buffer is a correctness bug.** The status response was malformed for a reason no test covered, because the test checked the fields that were present and not the ones that were cut off.
- **Keep the safety action out of the network callback.** The flap close is a loop condition, so the network cannot hold it open. The same pattern would carry a mass-controlled close when the load cell returns.
- **A percentage is an answer to a question.** The hopper level reports whether to refill. Describing it as an amount, or as a weight, would have been a stronger claim than the sensor supports.

15.4 Limitations accepted in this version

- The meal history is lost on reboot.

- Meal size is open loop and follows the flap dwell, not the mass dispensed.
- There is no authentication, so the device is safe only on a trusted network.
- The enclosure is cardboard, and the servo linkage is taped rather than machined.
- One hopper and one cat are supported, with no way to tell two cats apart.

Chapter 16 Future Work

16.1 Portion control by weight

The parts are already in the repository as a design: the HX711 amplifier, a 1 kg load cell, the wiring page, and a calibration sketch. The remaining work is to solder the module header, calibrate the cell against a known mass, and close the loop. The controller would open the flap, sample the mass, and close when the target is reached, with the existing timeout as the guard against a stalled or disconnected cell. The seam is already there, because every feeding path passes through `feed(source)`.

16.2 Persistence and notification

The daily history currently lives in RAM. A small append-only record in flash, capped at the last 32 meals, would survive a power cut and would let the owner see a week rather than a day. Once the history is durable, a notification path becomes useful, either as a message on the local network or as a publish to a broker when the deployment network allows it.

16.3 Cat identity and imaging

The device cannot tell one cat from another, and it cannot show that the cat ate rather than the bowl. An RFID collar tag would separate the portions between two cats. A camera module would attach evidence to a meal. Both are additions to a design that already has a single feeding path to hang them on.

16.4 Reliability and enclosure

A hardware watchdog would recover the device from a firmware hang without the owner power cycling it. A laser-cut or printed body would fix the servo geometry, which is currently held by tape and cardboard, and would make the flap repeat the same travel on every cycle.