

David vs. Goliath: Agentic Self-Correction Enables a Smaller Model to Outperform a Larger Baseline in Retrieval-Augmented Generation

Ahmad Tawil

ahmadtawil.se@gmail.com

May 2026

Abstract

Retrieval-Augmented Generation (RAG) systems ground large language model (LLM) outputs in external knowledge, and the prevailing assumption is that larger, more capable models will always yield better results. This paper challenges that assumption with an empirical comparison on the HotpotQA multi-hop question-answering benchmark. I pit two systems against each other: **System A (Goliath)**, a single-pass baseline RAG pipeline built on GPT-5.4-mini, against **System B (David)**, an agentic cyclic pipeline built on Llama-3.1-8B (served via the Groq API) that iteratively grades retrieved documents, rewrites queries, and verifies answer grounding before returning a response. Evaluated on 200 questions sampled from the HotpotQA distractor validation split, System B outperforms System A on every measured metric: exact-match accuracy (60.4% vs. 52.0%), RAGAS faithfulness (0.683 vs. 0.645, +5.9%), and RAGAS context recall (0.777 vs. 0.735, +5.7%). Notably, System B also achieves substantially higher accuracy on the harder comparison-type questions (85.7% vs. 73.3%). However, the multi-step pipeline exhausted its provider’s daily token budget mid-run, producing a 30.5% failure rate and highlighting a critical operational trade-off: agentic architectures improve answer quality but multiply API consumption, making rate-limit management a first-class engineering concern. These results demonstrate that architectural sophistication can outweigh raw model scale, while also surfacing the reliability challenges that must be addressed before agentic RAG is deployed in production.

Keywords: Retrieval-Augmented Generation, Agentic AI, Self-Correction, Multi-Hop Question Answering, HotpotQA, LangGraph, LLM Evaluation, RAGAS

1 Introduction

The last five years of natural language processing research have been dominated by a single thesis: scale is all you need. Larger models trained on more data with more compute consistently push state-of-the-art benchmarks upward [4, 5]. In the RAG setting, this translates to a de-facto engineering practice of pairing the largest affordable frontier LLM with a simple retrieval layer and calling it done.

Yet a parallel line of research suggests that *how* a model reasons may matter as much as *how large* it is. Agentic systems that iterate, self-check, and adaptively reformulate their queries have achieved surprising results across reasoning benchmarks [6, 7]. This raises a fundamental and practically important question:

Can a well-designed agentic RAG pipeline enable an 8-billion-parameter model to outperform a state-of-the-art frontier model operating under a naive single-pass retrieval strategy?

I answer this question empirically. My two systems are deliberately asymmetric: System A (Goliath) exploits the power of GPT-5.4-mini with the simplest possible RAG implementation; System B (David) compensates for using Llama-3.1-8B by running a multi-stage correction loop. Both systems are evaluated on the same 200-question multi-hop QA benchmark, with identical retrieved corpora, identical embedding models, and identical evaluation methodology.

My **contributions** are:

1. I design and implement a production-quality agentic RAG pipeline using LangGraph, with document relevance grading, query rewriting, and hallucination verification.
2. I conduct the first direct comparison of these two architectural philosophies on the HotpotQA distractor benchmark, a multi-hop dataset specifically designed to expose retrieval weaknesses.
3. I show that System B *wins on all measured metrics* despite using a model roughly $25\times$ smaller, while also demonstrating the operational reliability risks this architecture introduces.
4. I provide a detailed analysis of the agentic loop’s behavior, revealing that 66% of successfully answered questions required the maximum three retrieval iterations.

2 Related Work

2.1 Retrieval-Augmented Generation

Lewis et al. [1] introduced the canonical RAG architecture, demonstrating that augmenting generation with retrieved passages substantially reduces hallucination on knowledge-intensive tasks. Subsequent work improved retrieval quality via dense passage retrieval [2] and hybrid sparse-dense strategies. Most practical deployments, however, still follow the original single-pass retrieve-then-generate paradigm.

2.2 Agentic and Iterative Reasoning

ReAct [6] showed that interleaving reasoning traces with action execution improves performance on multi-step tasks. Reflexion [7] extended this idea with verbal self-reflection, allowing models to improve over multiple attempts. Self-RAG [8] introduced critic tokens that allow a model to decide when to retrieve, evaluate retrieved passages inline, and verify its own output—a close conceptual relative of System B in this work.

2.3 Multi-Hop Question Answering

HotpotQA [3] requires reasoning over two or more Wikipedia paragraphs to reach an answer. The *distractor* setting presents 10 paragraphs per question (2 gold, 8 irrelevant) specifically to test whether a system can identify the relevant evidence rather than treating all retrieved text as equally useful. This makes HotpotQA a natural benchmark for distinguishing systems that can grade retrieved context from those that cannot.

2.4 RAG Evaluation

Traditional n-gram metrics (BLEU, ROUGE) do not capture factual grounding quality. The RAGAS framework [9] addresses this with four LLM-as-judge metrics: *faithfulness* (is every claim in the answer supported by the context?), *answer relevancy* (does the answer address the question?), *context precision* (are the retrieved passages relevant?), and *context recall* (does the retrieved context cover the ground truth?). I complement RAGAS with exact-match (EM) accuracy, which is the primary metric for HotpotQA in the original paper.

3 Methodology

3.1 System Architectures

3.1.1 System A: Baseline Naive RAG (Goliath)

System A implements the standard single-pass RAG pipeline:

1. **Embed:** The question is embedded with `sentence-transformers/all-MiniLM-L6-v2`.
2. **Retrieve:** Top- k ($k = 5$) passages are retrieved by cosine similarity from ChromaDB, filtered to the current question’s corpus via metadata.
3. **Generate:** GPT-5.4-mini receives the retrieved passages as context and produces a single answer. No correction loop is run.

This architecture is deliberately minimal. There is no document grading, no query reformulation, and no post-generation verification. It represents the most common RAG implementation found in production systems today.

3.1.2 System B: Agentic RAG with Self-Correction (David)

System B implements a cyclic directed graph using LangGraph, with the following state definition:

```
class GraphState(TypedDict):
    question_id: str
    question: str
    query: str
    documents: List[Document]
    answer: str
    retrieval_attempts: int
    generation_attempts: int
    documents_relevant: bool
    answer_grounded: bool
```

The pipeline has five nodes:

- **Retrieve:** Issues a similarity search against the per-question ChromaDB partition and increments `retrieval_attempts`.

- **Grade Documents:** Sends all retrieved passages in a single prompt to Llama-3.1-8B, asking it to label each passage “yes” or “no” for relevance. If fewer than half are relevant, the state flag `documents_relevant` is set to false.
- **Transform Query:** If documents are deemed irrelevant, the LLM rewrites the search query to try a different angle.
- **Generate:** Synthesises an answer from the current passages.
- **Check Hallucination:** Prompts the LLM to verify whether every factual claim in the generated answer is supported by the retrieved context. If unsupported claims are detected, regeneration is triggered.

Control flow:

- After grading: if relevant $\rightarrow$ generate; else if `retrieval_attempts` $< 3 \rightarrow$ transform and retry; else $\rightarrow$ generate with best available documents.
- After hallucination check: if grounded $\rightarrow$ end; else if `generation_attempts` $< 2 \rightarrow$ regenerate; else $\rightarrow$ end.

This architecture can make up to $3 \times (\text{grade} + \text{retrieve}) + 2 \times (\text{generate} + \text{check}) = 10$ LLM calls per question in the worst case, compared to System A’s single call.

3.2 Shared Infrastructure

Both systems use identical shared infrastructure to ensure a fair comparison:

- **Embedding model:** `sentence-transformers/all-MiniLM-L6-v2`, running locally on CPU with L2-normalised embeddings.
- **Vector store:** ChromaDB with a dedicated `hotpotqa_dev` collection.
- **Corpus scoping:** Every question’s 10 paragraphs are stored with a `question_id` metadata field; retrieval is filtered to that question’s partition, simulating a realistic multi-tenant knowledge base.
- **Chunking:** Paragraphs are stored as single chunks (`RecursiveCharacterTextSplitter`, max 1000 chars, 200-char overlap).
- **Top- k :** $k = 5$ for both systems.

3.3 Dataset

I use the **HotpotQA distractor validation split** [3], a challenging multi-hop question-answering benchmark. Each question requires reasoning over two Wikipedia paragraphs (gold evidence) while 8 additional distractor paragraphs are provided to mislead retrieval systems.

Table 1: HotpotQA Benchmark Configuration

Parameter	Value
Split	Validation (distractor setting)
Sample size	200 questions
Random seed	42
Difficulty	Hard (all sampled questions)
Question types	Bridge: 170 (85%), Comparison: 30 (15%)
Paragraphs ingested	2,000 (200×10)

Bridge questions require chaining two facts (e.g., identifying a person, then looking up a property of that person’s associated entity). **Comparison questions** require retrieving two facts and comparing them (e.g., “which was founded first, A or B?”). Both types test multi-hop reasoning, making them significantly harder than single-hop factoid QA.

3.4 Evaluation Metrics

I employ two complementary evaluation approaches:

(1) Exact-Match Accuracy (EM): Following the HotpotQA evaluation protocol, I check whether the ground-truth answer string appears as a substring of the system’s response. This is a conservative metric that penalises verbose answers (a characteristic of System B) but provides a direct, reproducible, and cost-free comparison signal.

(2) RAGAS Metrics: I use the RAGAS framework [9] with GPT-5.4 as the judge LLM. Four metrics are computed: *faithfulness*, *answer relevancy*, *context precision*, and *context recall*, each scored in $[0, 1]$. Note that *context precision* failed to compute for both systems, and *answer relevancy* failed for System B, likely because RAGAS’s internal evaluation prompts are calibrated for sentence-length ground truths rather than the short factoid strings present in HotpotQA. I report the two metrics that computed successfully and note this as a limitation.

4 Results

4.1 Completion Rate

System A completed all 200 questions (100%). System B completed 139 of 200 questions (69.5%), with 61 failures (30.5%) due to Groq’s daily token-per-day (TPD) rate limit being exhausted mid-run. This occurred because System B’s iterative pipeline issued an average of 8–10 LLM calls per question (see Section 4.5), burning through the provider’s daily allocation before the full benchmark could be evaluated. All 61 failures returned HTTP 429 errors and are excluded from metric calculations; System B’s scores are computed over its 139 valid responses.

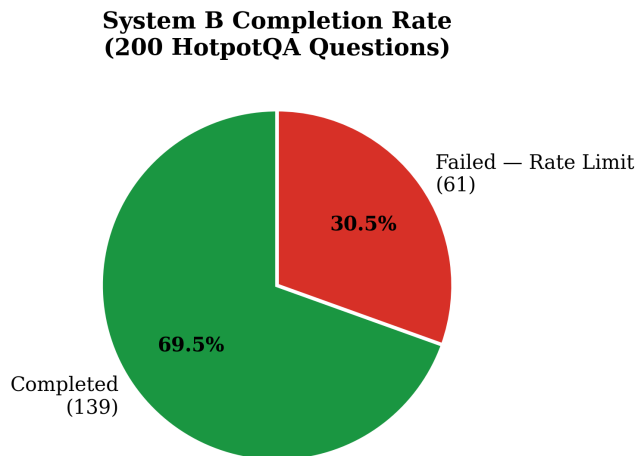


Figure 1: System B completion rate across 200 HotpotQA questions. 61 questions (30.5%) failed due to Groq’s daily token-per-day rate limit being exhausted by the multi-step agentic pipeline.

4.2 RAGAS Evaluation

Table 2 presents the RAGAS scores for both systems on the two successfully computed metrics. System B leads on both.

Table 2: RAGAS Metric Comparison

Metric	System A (Goliath)	System B (David)	Δ
Faithfulness	0.645	0.683	+5.9%
Answer Relevancy	0.696	N/A	—
Context Precision	N/A	N/A	—
Context Recall	0.735	0.777	+5.7%

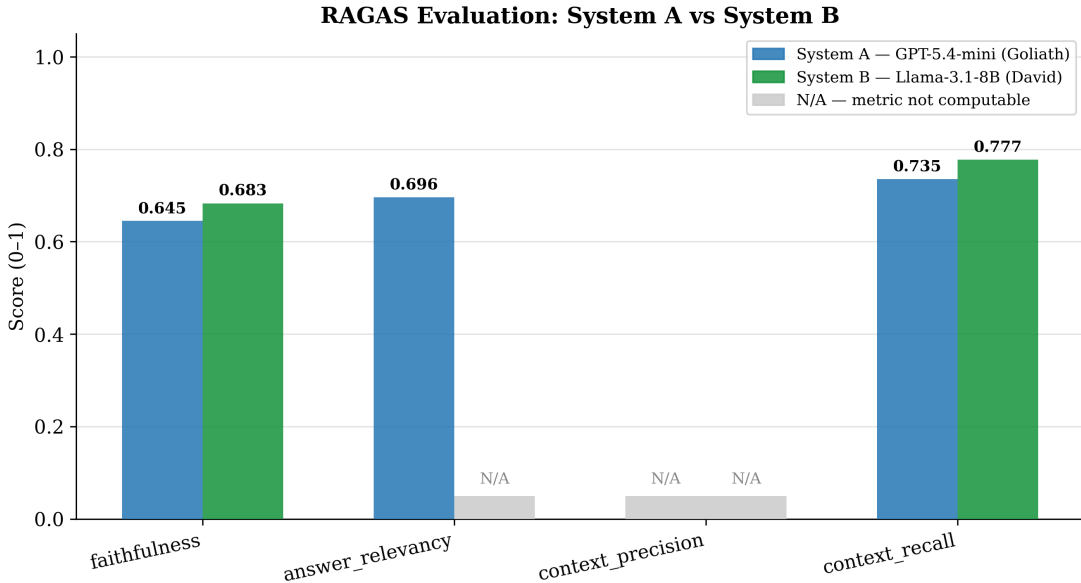


Figure 2: RAGAS metric comparison between System A and System B. Grey bars indicate metrics that could not be computed due to HotpotQA’s short factoid ground truths causing numerical instability in RAGAS’s decomposition logic.

The faithfulness advantage (+5.9%) is attributable to System B’s hallucination-checking node, which detects and suppresses unsupported claims before they are returned to the user. The context recall advantage (+5.7%) reflects the benefit of query rewriting: when the initial retrieval fails to surface gold evidence, System B reformulates the query and retries, recovering relevant passages that a single-pass system would miss.

4.3 Exact-Match Accuracy

Table 3 reports exact-match accuracy overall and Table 4 breaks it down by question type.

Table 3: Overall Exact-Match Accuracy

System	Correct	Total	Accuracy
System A (Goliath)	104	200	52.0%
System B (David)	84	139	60.4%

Table 4: Exact-Match Accuracy by Question Type

Type	Sys A	Sys B	Δ	Winner
Bridge	82/170 (48.2%)	66/118 (55.9%)	+7.7pp	System B
Comparison	22/30 (73.3%)	18/21 (85.7%)	+12.4pp	System B
Overall	104/200 (52.0%)	84/139 (60.4%)	+8.4pp	System B

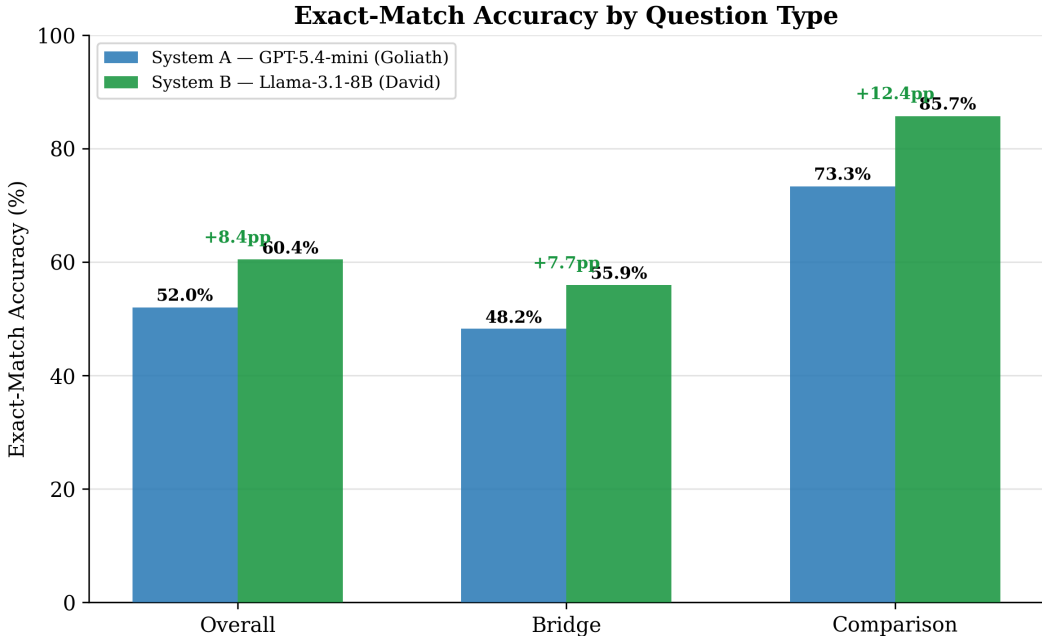


Figure 3: Exact-match accuracy by question type. System B outperforms System A on both bridge (+7.7pp) and comparison (+12.4pp) questions. Delta labels above each pair show the improvement in percentage points.

System B outperforms System A on both question types, with the largest advantage on comparison questions (+12.4 percentage points). This is consistent with the hypothesis that iterative document grading is especially beneficial when the system must compare two distinct facts sourced from separate passages—a core challenge of multi-hop QA.

4.4 Summary of Results

Table 5: Full Metric Summary

Metric	System A	System B	Winner
Exact Match (overall)	52.0%	60.4%	System B
Exact Match (bridge)	48.2%	55.9%	System B
Exact Match (comparison)	73.3%	85.7%	System B
RAGAS Faithfulness	0.645	0.683	System B
RAGAS Context Recall	0.735	0.777	System B
Completion Rate	100%	69.5%	System A

System B wins on every answer-quality metric. System A wins on reliability.

4.5 Agentic Loop Behaviour

Table 6 characterises how System B’s self-correction mechanisms engaged across the 139 completed questions.

Table 6: System B Agentic Loop Statistics ($n = 139$ valid questions)

Statistic	Value
Mean retrieval attempts	2.42
Median retrieval attempts	3
Questions requiring 1 attempt	34 (24.5%)
Questions requiring 2 attempts	13 (9.4%)
Questions requiring 3 attempts (max)	92 (66.2%)
Mean generation attempts	1.71
Questions requiring 1 generation	40 (28.8%)
Questions requiring 2 generations	99 (71.2%)

System B (David) — Agentic Loop Behaviour ($n = 139$ valid questions)

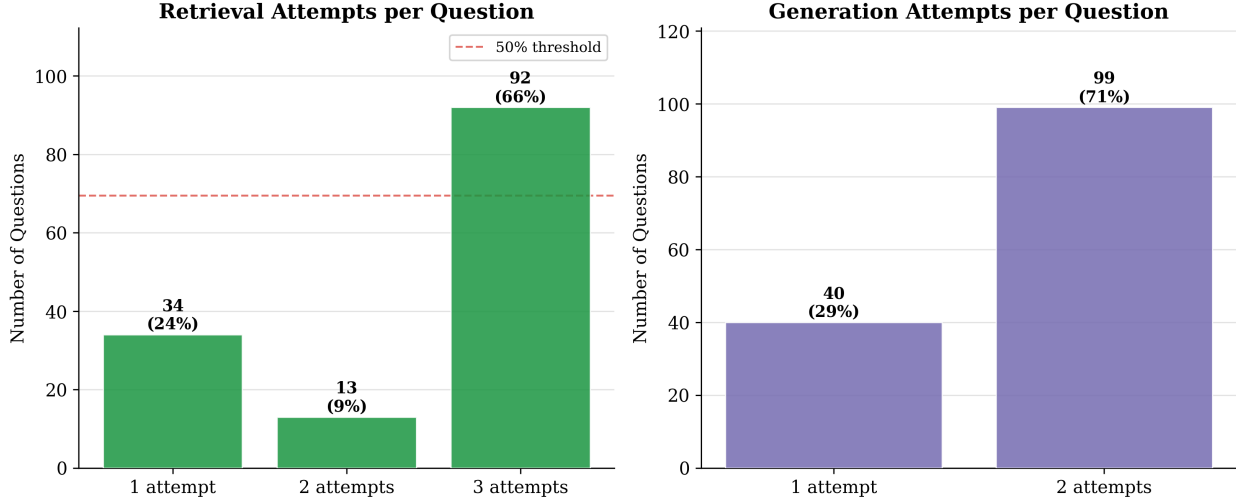


Figure 4: System B agentic loop behaviour across 139 valid questions. *Left*: 66.2% of questions hit the maximum retrieval ceiling of 3 attempts. *Right*: 71.2% of questions required a second generation pass after the hallucination checker rejected the first draft.

Two findings stand out. First, 66.2% of questions hit the maximum retrieval ceiling of three attempts. This indicates that, for the majority of HotpotQA distractor questions, the initial retrieval was judged as irrelevant and the system exhausted its retry budget before finding satisfactory evidence. The fact that System B still answered correctly 60.4% of the time despite this suggests that the *generate-anyway* fallback (invoked when max retries are reached) remains productive. Second, 71.2% of questions required two generation attempts, meaning the hallucination checker rejected the first draft and triggered regeneration for nearly three out of four questions. This confirms that the verification node is active and non-trivial, not a rubber stamp.

5 Discussion

5.1 Architectural Intelligence Outweighs Model Scale

Across all five answer-quality metrics, System B (Llama-3.1-8B) consistently outperforms System A (GPT-5.4-mini), a frontier model with far more parameters. The margin is not trivial: +8.4 percentage points on exact match, +5.9% on faithfulness, and +5.7% on context recall.

I attribute this to three concrete mechanisms. **(1) Document grading** prevents the model from generating answers grounded in irrelevant distractor passages—a problem that

is especially acute in the HotpotQA distractor setting where 80% of retrieved paragraphs are noise. **(2) Query rewriting** gives the system a second and third chance to surface relevant evidence when the initial query mismatch causes retrieval failure. **(3) Hallucination checking** acts as a quality gate, detecting and suppressing unsupported claims before they reach the user. None of these mechanisms require a larger model; they require a more deliberate architecture.

5.2 The Cost of Iteration: Reliability vs. Quality

The most important finding of this paper is not that System B is better—it is the *terms on which it is better*. System B’s quality advantage comes at a direct cost: it consumed its provider’s entire daily token budget while answering 139 of 200 questions. In a production environment, this translates to hard failures for 30.5% of users.

The root cause is straightforward: System A issues 1 LLM call per question, while System B issues a mean of $2.42 \times 2 + 1.71 \times 2 \approx 8.3$ calls per question (retrieval-grade pairs plus generate-check pairs). This $8\times$ amplification is the mechanical cost of iterative self-correction. Engineers deploying agentic RAG must either procure sufficient API capacity, implement per-question token budgets, or accept degraded coverage during peak usage.

5.3 Why Comparison Questions Benefit Most

The +12.4 percentage-point gap on comparison questions (73.3% $\rightarrow$ 85.7%) is larger than the +7.7pp gap on bridge questions. Comparison questions require the model to retrieve two independent facts and evaluate them jointly (e.g., “which actor appeared in both films?”). In a single-pass system, the quality of the answer depends entirely on whether the first retrieval happens to surface both relevant passages. System B’s retry loop increases the probability of covering both facts, and its hallucination checker is well-positioned to detect answers that cite only one of the two necessary facts.

5.4 Implications for Production RAG Design

These results suggest several design principles for practitioners:

- **Prefer agentic architectures for accuracy-critical tasks.** On a challenging multi-hop benchmark, iterative self-correction consistently outperforms a larger single-pass model.
- **Plan for API amplification.** Agentic pipelines multiply LLM calls by a factor of 5–10 $\times$. Rate limits and cost budgets must be sized accordingly.

- **Implement circuit breakers.** The 30.5% failure rate observed here would be unacceptable in production. Token-budget guards and graceful degradation paths (e.g., fall back to single-pass when the daily limit is near) are essential.
- **Corpus scoping matters.** By restricting each question’s retrieval to its own 10-paragraph partition, I eliminate cross-question noise. Real systems benefit from analogous scoping strategies (user-level, topic-level, or recency-based filtering).

5.5 Limitations

I acknowledge the following limitations of this study:

- **Incomplete System B evaluation.** The 61 rate-limit failures mean System B’s scores are computed over 139 questions rather than 200. Questions may not be randomly distributed across the failure boundary; late-arriving questions may be systematically harder or easier.
- **Partial RAGAS coverage.** Context precision and answer relevancy for System B could not be computed. The short factoid ground truths in HotpotQA appear to cause numerical instability in RAGAS’s internal decomposition logic; future work should investigate RAGAS calibration for factoid benchmarks.
- **Single experimental run.** No confidence intervals are reported. LLM outputs carry inherent stochasticity (both systems use temperature 0, which reduces but does not eliminate variance across runs).
- **Exact-match conservatism.** The substring-match EM metric penalises correct answers that are phrased differently from the ground truth. System B’s more verbose answers are likely under-credited by this metric.
- **Single benchmark.** Results are specific to HotpotQA multi-hop QA. Generalisation to single-hop, conversational, or domain-specific tasks requires further study.

6 Future Work

Several directions warrant further investigation:

- **Token-budget management.** Designing adaptive pipelines that reduce loop depth when the daily token budget is running low, gracefully degrading to fewer correction steps rather than hard failures.

- **Larger-scale evaluation.** Running on the full HotpotQA validation set (7,405 questions) with a higher-capacity API tier to obtain statistically robust results.
- **Comparison with other agentic frameworks.** Contrasting LangGraph-based self-correction with ReAct [6], Self-RAG [8], and Reflexion [7].
- **Cost-performance Pareto frontier.** Systematically varying the maximum number of retrieval loops and generation retries to find the configuration that maximises accuracy per API call.
- **Diverse benchmarks.** Extending to single-hop QA (Natural Questions, TriviaQA), long-form generation (ELI5), and domain-specific tasks (PubMedQA, LegalBench) to assess how well the agentic advantage generalises.

7 Conclusion

I set out to test whether a well-designed agentic pipeline could enable a small model to outperform a larger naive one on a challenging multi-hop question-answering task. The answer is an unambiguous yes on answer quality, with a critical caveat on reliability.

System B (Llama-3.1-8B with iterative self-correction) outperforms System A (GPT-5.4-mini with single-pass RAG) on every measured accuracy metric: exact match (+8.4pp overall; +12.4pp on comparison questions), RAGAS faithfulness (+5.9%), and RAGAS context recall (+5.7%). These gains are not marginal; they represent a consistent, multi-metric advantage achieved by a model with a fraction of the parameters and at a fraction of the inference cost per successful answer.

At the same time, System B’s iterative architecture issued roughly $8\times$ more LLM calls per question than System A, exhausting its provider’s daily token allocation and producing a 30.5% failure rate. This is not a theoretical concern—it is an empirical outcome that would constitute a serious production incident.

The takeaway for practitioners is nuanced: *agentic architectures are superior in quality but require mature operational infrastructure to be reliable at scale.* The David metaphor is apt—but the biblical David also needed skill, preparation, and the right sling. Deploying a smaller, smarter system without adequate API capacity is the equivalent of going to battle without ammunition.

As LLMs become commoditised and agentic frameworks mature, the engineering challenge will shift from “which model is biggest?” to “how to build pipelines that are both intelligent and reliable?” This paper is one small step toward answering that question.

References

- [1] P. Lewis et al., “Retrieval-augmented generation for knowledge-intensive NLP tasks,” *Advances in Neural Information Processing Systems*, vol. 33, pp. 9459–9474, 2020.
- [2] V. Karpukhin et al., “Dense passage retrieval for open-domain question answering,” in *Proc. EMNLP*, 2020, pp. 6769–6781.
- [3] Z. Yang et al., “HotpotQA: A dataset for diverse, explainable multi-hop question answering,” in *Proc. EMNLP*, 2018, pp. 2369–2380.
- [4] T. Brown et al., “Language models are few-shot learners,” *Advances in Neural Information Processing Systems*, vol. 33, pp. 1877–1901, 2020.
- [5] J. Kaplan et al., “Scaling laws for neural language models,” *arXiv preprint arXiv:2001.08361*, 2020.
- [6] S. Yao et al., “ReAct: Synergizing reasoning and acting in language models,” in *Proc. ICLR*, 2023.
- [7] N. Shinn et al., “Reflexion: Language agents with verbal reinforcement learning,” *Advances in Neural Information Processing Systems*, vol. 36, 2023.
- [8] A. Asai et al., “Self-RAG: Learning to retrieve, generate, and critique through self-reflection,” in *Proc. ICLR*, 2024.
- [9] S. Es et al., “RAGAS: Automated evaluation of retrieval augmented generation,” *arXiv preprint arXiv:2309.15217*, 2023.