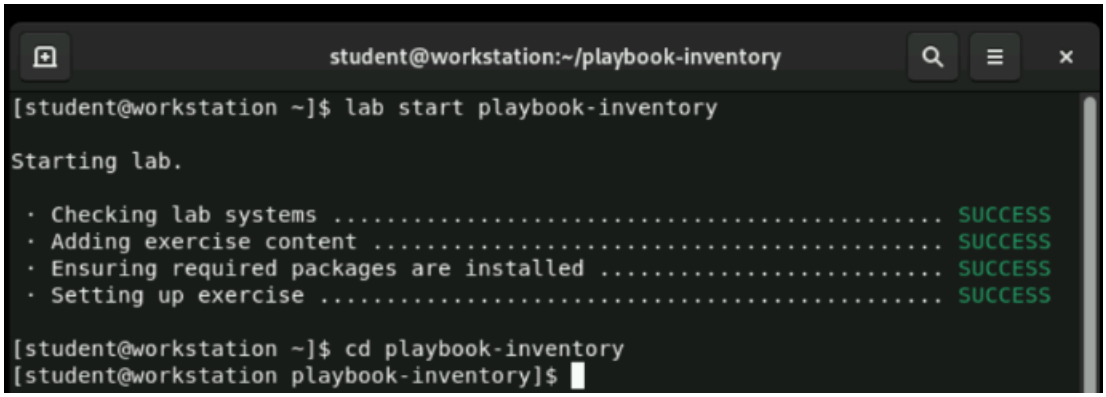
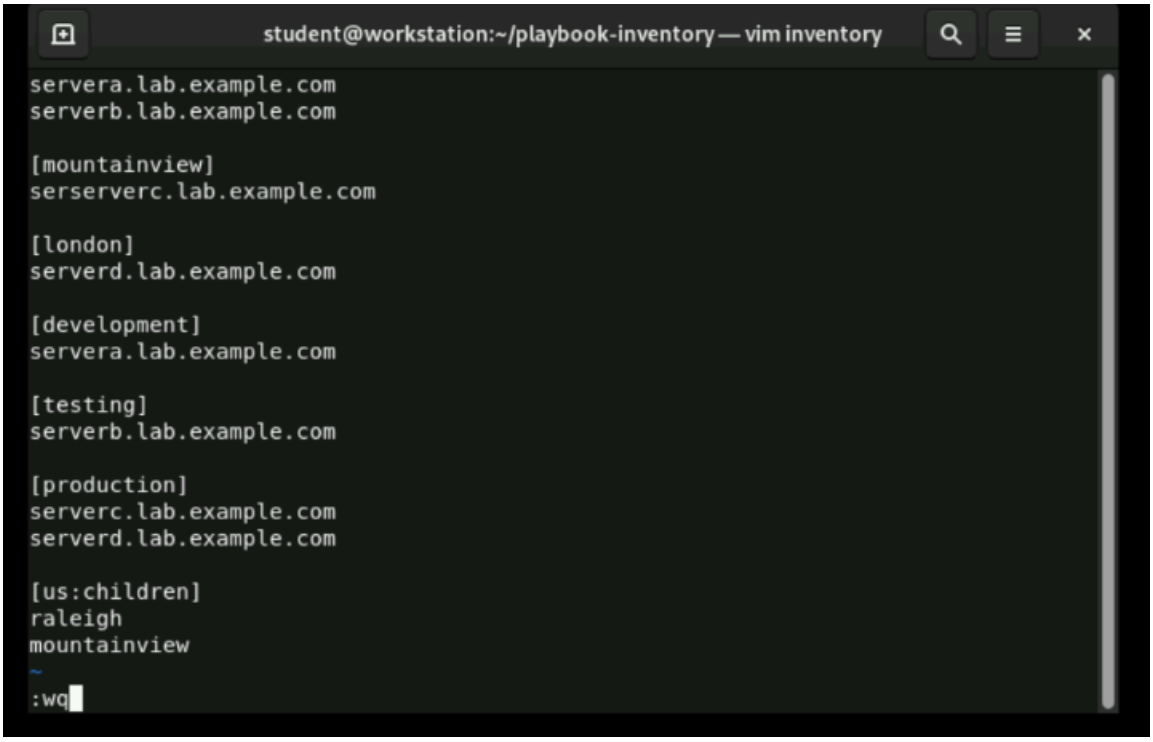
Guided Exercise: Building an Ansible Inventory Ahmed Abdelhedi

1/



2/



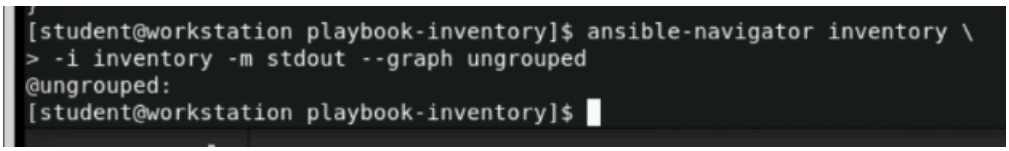
3.1/



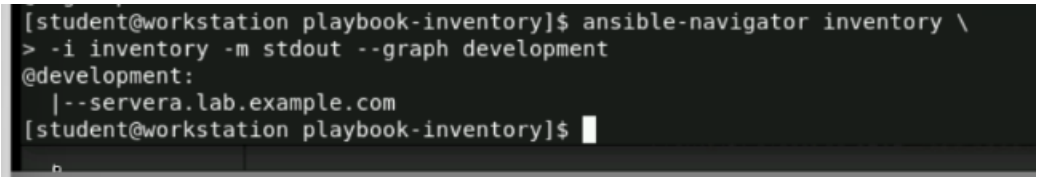
```
[student@workstation playbook-inventory]$ ansible-navigator inventory \
> -i inventory -m stdout --list
{
    "_meta": {
        "hostvars": {}
    },
    "all": {
        "children": [
            "development",
            "london",
            "production",
            "testing",
            "ungrouped",
            "us",
            "webservers"
        ]
    },
    "development": {
        "hosts": [
            "servera.lab.example.com"
        ]
    },
    "london": {
        "hosts": [
            "serverd.lab.example.com"
        ]
    },
    "mountainview": {
        "hosts": [
            "serverc.lab.example.com"
        ]
    },
    "production": {
```


student@workstation:~/playbook-inventory
File Edit View Search Terminal Help
]
},
"production": {
"hosts": [
"serverc.lab.example.com",
"serverd.lab.example.com"
]
},
"raleigh": {
"hosts": [
"servera.lab.example.com",
"serverb.lab.example.com"
]
},
"testing": {
"hosts": [
"serverb.lab.example.com"
]
},
"us": {
"children": [
"mountainview",
"raleigh"
]
},
"webservers": {
"hosts": [
"servera.lab.example.com",
"serverb.lab.example.com",
"serverc.lab.example.com",
"serverd.lab.example.com"
]
}
}
[student@workstation playbook-inventory]$

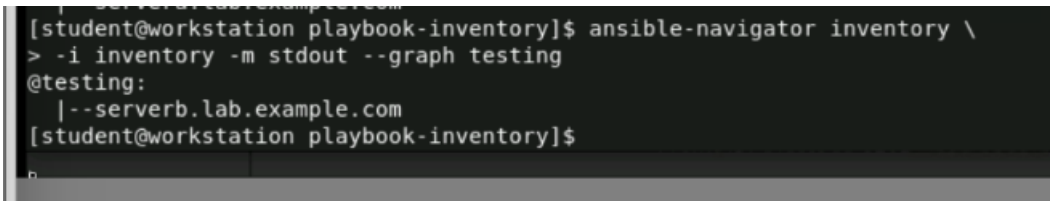
3.2/


[student@workstation playbook-inventory]$ ansible-navigator inventory \
> -i inventory -m stdout --graph ungrouped
@ungrouped:
[student@workstation playbook-inventory]$

3.3/


[student@workstation playbook-inventory]$ ansible-navigator inventory \
> -i inventory -m stdout --graph development
@development:
|--servera.lab.example.com
[student@workstation playbook-inventory]$

3.4/


[student@workstation playbook-inventory]$ ansible-navigator inventory \
> -i inventory -m stdout --graph testing
@testing:
|--serverb.lab.example.com
[student@workstation playbook-inventory]$

3.5/

```
[student@workstation playbook-inventory]$ ansible-navigator inventory \
> -i inventory -m stdout --graph production
@production:
  |--serverc.lab.example.com
  |--serverd.lab.example.com
[student@workstation playbook-inventory]$
```

3.6/

```
[student@workstation playbook-inventory]$ ansible-navigator inventory \
> -i inventory -m stdout --graph us
@us:
  |--@mountainview:
  |  |--serverc.lab.example.com
  |--@raleigh:
  |  |--servera.lab.example.com
  |  |--serverb.lab.example.com
[student@workstation playbook-inventory]$
```

3.7/

