


## Lab - Configure CDP and LLDP

### Topology

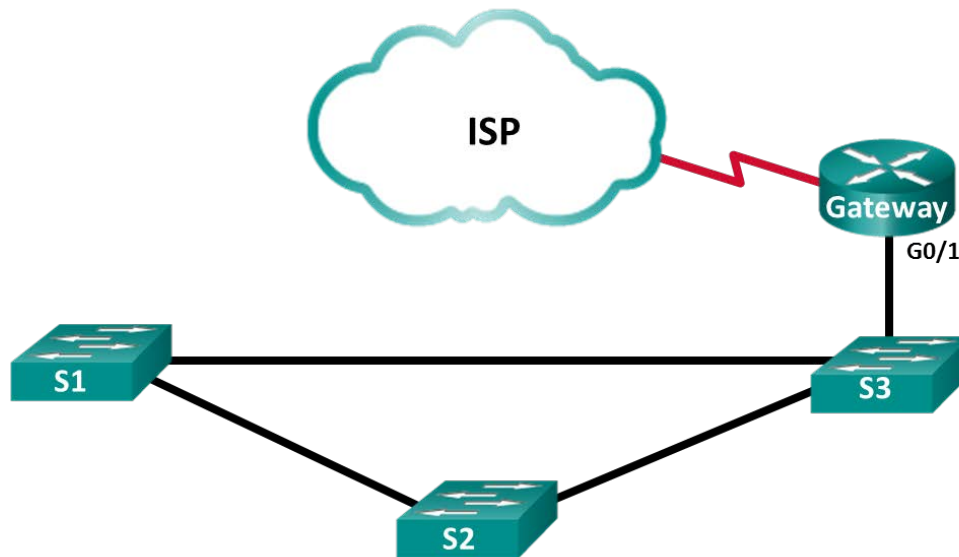

### Addressing Table

Device	Interface	IP Address	Subnet Mask
Gateway	G0/1	192.168.1.254	255.255.255.0
	S0/0/1	209.165.200.226	255.255.255.252
ISP	S0/0/1 (DCE)	209.165.200.225	255.255.255.252

### Objectives

**Part 1: Build the Network and Configure Basic Device Settings**

**Part 2: Network Discovery with CDP**

**Part 3: Network Discovery with LLDP**

### Background / Scenario

Cisco Discovery Protocol (CDP) is a Cisco proprietary protocol for network discovery on the data link layer. It can share information such as device names and IOS versions, with other physically connected Cisco devices. Link Layer Discovery Protocol (LLDP) is vendor-neutral protocol using on the data link layer for network discovery. It is mainly used with network devices in the local area network (LAN). The network devices advertise information, such as their identities and capabilities to their neighbors.

In this lab, you must document the ports that are connected to other switches using CDP and LLDP. You will document your findings in a network topology diagram. You will also enable or disable these discovery protocols as necessary.

**Note:** The routers used with CCNA hands-on labs are Cisco 1941 Integrated Services Routers (ISRs) with Cisco IOS Release 15.2(4)M3 (universalk9 image). The switches used are Cisco Catalyst 2960s with Cisco IOS Release 15.0(2) (lanbasek9 image). Other routers, switches, and Cisco IOS versions can be used.

Depending on the model and Cisco IOS version, the commands available and the output produced might vary from what is shown in the labs. Refer to the Router Interface Summary Table at the end of this lab for the correct interface identifiers.

**Note:** Make sure that the routers and switches have been erased and have no startup configurations. If you are unsure, contact your instructor.

### Required Resources

- 2 Routers (Cisco 1941 with Cisco IOS Release 15.2(4)M3 universal image or comparable)
- 3 Switches (Cisco 2960 with Cisco IOS Release 15.0(2) lanbasek9 image or comparable)
- Console cables to configure the Cisco IOS devices via the console ports
- Ethernet cables as shown in the topology

## Part 1: Build the Network and Configure Basic Device Settings

In Part 1, you will set up the network topology and configure basic settings on the router and switches.

### Step 1: Cable the network as shown in the topology.

The Ethernet ports used on the switches are not specified in the topology. You may choose to use any Ethernet ports to cable the switches as shown in the topology diagram.

### Step 2: Initialize and reload the network devices as necessary.

### Step 3: Configure basic device settings for the switches.

- Console into the device and enable privileged EXEC mode.
- Enter configuration mode.
- Disable DNS lookup to prevent the switch from attempting to translate incorrectly entered commands as though they were host names.
- Configure the hostname according to the topology.
- Verify that the switchports with connected Ethernet cables are enabled.
- Save the running configuration to the startup configuration file.

### Step 4: Configure basic device settings for the routers.

- Console into the device and enable privileged EXEC mode.
- Enter configuration mode.
- Copy and paste the following configurations into the routers.

#### ISP:

```
hostname ISP
no ip domain lookup
interface Serial0/0/1
  ip address 209.165.200.225 255.255.255.252
  no shutdown
```

#### Gateway:

```
hostname Gateway
```

```
no ip domain lookup
interface GigabitEthernet0/1
  ip address 192.168.1.254 255.255.255.0
  ip nat inside
  no shutdown
interface Serial0/0/1
  ip address 209.165.200.226 255.255.255.252
  ip nat outside
  no shutdown
ip nat inside source list 1 interface Serial0/0/1 overload
access-list 1 permit 192.168.1.0 0.0.0.255
```

- d. Save the running configuration to the startup configuration file.

## Part 2: Network Discovery with CDP

On Cisco devices, CDP is enabled by default. You will use CDP to discover the ports that are currently connected.

- a. On router Gateway, enter the **show cdp** command in the privileged EXEC mode to verify that CDP is currently enabled on router Gateway.

```
Gateway# show cdp
Global CDP information:
    Sending CDP packets every 60 seconds
    Sending a holdtime value of 180 seconds
    Sending CDPv2 advertisements is enabled
```

How often are CDP packets sent?

If CDP is disabled on Gateway, enable CDP by issuing the **cdp run** command in the global configuration mode.

```
Gateway(config)# cdp run
Gateway(config)# end
```

- b. Issue the **show cdp interface** to list the interfaces that are participating in CDP advertisements.

```
Gateway# show cdp interface
Embedded-Service-Engine0/0 is administratively down, line protocol is down
  Encapsulation ARPA
  Sending CDP packets every 60 seconds
  Holdtime is 180 seconds
GigabitEthernet0/0 is administratively down, line protocol is down
  Encapsulation ARPA
  Sending CDP packets every 60 seconds
  Holdtime is 180 seconds
GigabitEthernet0/1 is up, line protocol is up
  Encapsulation ARPA
  Sending CDP packets every 60 seconds
  Holdtime is 180 seconds
```

```
Serial0/0/0 is administratively down, line protocol is down
  Encapsulation HDLC
  Sending CDP packets every 60 seconds
  Holdtime is 180 seconds
Serial0/0/1 is up, line protocol is up
  Encapsulation HDLC
  Sending CDP packets every 60 seconds
  Holdtime is 180 seconds
```

```
cdp enabled interfaces : 5
interfaces up          : 2
interfaces down        : 3
```

How many interfaces are participating in the CDP advertisement? Which interfaces are up?

- c. Issue the **show cdp neighbors** command to determine the CDP neighbors.

```
Gateway# show cdp neighbors
```

```
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone,
                  D - Remote, C - CVTA, M - Two-port Mac Relay
```

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
ISP	Ser 0/0/1	158	R B S I	CISCO1941	Ser 0/0/1
S3	Gig 0/1	170	S I	WS-C2960-	Fas 0/5

- d. For more details on CDP neighbors, issue the **show cdp neighbors detail** command.

```
Gateway# show cdp neighbors detail
```

```
-----
```

```
Device ID: ISP
```

```
Entry address(es):
```

```
  IP address: 209.165.200.225
```

```
Platform: Cisco CISCO1941/K9, Capabilities: Router Source-Route-Bridge
Switch IGMP
```

```
Interface: Serial0/0/1, Port ID (outgoing port): Serial0/0/1
```

```
Holdtime : 143 sec
```

```
Version :
```

```
Cisco IOS Software, C1900 Software (C1900-UNIVERSALK9-M), Version 15.4(3)M2,
RELEASE SOFTWARE (fc2)
```

```
Technical Support: http://www.cisco.com/techsupport
```

```
Copyright (c) 1986-2015 by Cisco Systems, Inc.
```

```
Compiled Fri 06-Feb-15 17:01 by prod_rel_team
```

```
advertisement version: 2
```

```
Management address(es):
```

```
  IP address: 209.165.200.225
```

```
-----  
Device ID: S3  
Entry address(es):  
Platform: cisco WS-C2960-24TT-L, Capabilities: Switch IGMP  
Interface: GigabitEthernet0/1, Port ID (outgoing port): FastEthernet0/5  
Holdtime : 158 sec  
  
Version :  
Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE7,  
RELEASE SOFTWARE (fcl)  
Technical Support: http://www.cisco.com/techsupport  
Copyright (c) 1986-2014 by Cisco Systems, Inc.  
Compiled Thu 23-Oct-14 14:49 by prod_rel_team  
  
advertisement version: 2  
Protocol Hello: OUI=0x00000C, Protocol ID=0x0112; payload len=27,  
value=00000000FFFFFFFF010221FF00000000000000CD996E87400FF0000  
VTP Management Domain: ''  
Native VLAN: 1  
Duplex: full
```

- e. What can you learn about ISP and S3 from the outputs of the **show cdp neighbors detail** command?

- f. Configure the SVI on S3. Use an available IP address in 192.168.1.0 / 24 network. Configure 192.168.1.254 as the default gateway.

```
S3(config)# interface vlan 1  
S3(config-if)# ip address 192.168.1.3 255.255.255.0  
S3(config-if)# no shutdown  
S3(config-if)# exit  
S3(config)# ip default-gateway 192.168.1.254
```

- g. Issue the **show cdp neighbors detail** command on Gateway. What additional information is available?

- h. For security reasons, it is a good idea to turn off CDP on an interface facing an external network. Issue the **no cdp enable** in the interface configuration mode on the S0/0/1 interface on Gateway.

```
Gateway(config)# interface s0/0/1  
Gateway(config-if)# no cdp enable  
Gateway(config-if)# end
```

To verify that CDP has been turned off on the interface S0/0/1, issue the **show cdp neighbors** or **show cdp interface** command. You may need to wait for the hold time to expire. The hold time is the amount of time the network devices will hold the CDP packets until the devices discard them.

```
Gateway# show cdp neighbors  
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge  
S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone,
```

D - Remote, C - CVTA, M - Two-port Mac Relay

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
S3	Gig 0/1	161	S I	WS-C2960-	Fas 0/5

The interface S0/0/1 on Gateway no longer has a CDP adjacency with the ISP router. But it still has CDP adjacencies with other interfaces.

Gateway# **show cdp interface**

Embedded-Service-Engine0/0 is administratively down, line protocol is down

Encapsulation ARPA

Sending CDP packets every 60 seconds

Holdtime is 180 seconds

GigabitEthernet0/0 is administratively down, line protocol is down

Encapsulation ARPA

Sending CDP packets every 60 seconds

Holdtime is 180 seconds

GigabitEthernet0/1 is up, line protocol is up

Encapsulation ARPA

Sending CDP packets every 60 seconds

Holdtime is 180 seconds

Serial0/0/0 is administratively down, line protocol is down

Encapsulation HDLC

Sending CDP packets every 60 seconds

Holdtime is 180 seconds

cdp enabled interfaces : 4

interfaces up : 1

interfaces down : 3

- i. To disable CDP globally, issue the **no cdp run** command in the global configuration mode.

Gateway# **conf t**

Gateway(config)# **no cdp run**

Gateway(config)# **end**

Which command(s) would you use to verify that CDP has been disabled?

- j. Enable CDP globally on Gateway. How many interfaces are CDP enabled? Which interfaces are CDP disabled?

- k. Console into all the switches and use the CDP commands to determine the Ethernet ports that connected to other devices. An example of the CDP commands for S3 is displayed below.

S3# **show cdp neighbors**

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge

S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone,

D - Remote, C - CVTA, M - Two-port Mac Relay

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
Gateway	Fas 0/5	143	R B S I	CISCO1941	Gig 0/1
S2	Fas 0/2	173	S I	WS-C2960-	Fas 0/4
S1	Fas 0/4	171	S I	WS-C2960-	Fas 0/4

### Part 3: Network Discovery with LLDP

On Cisco devices, LLDP maybe enabled by default. You will use LLDP to discover the ports that are currently connected.

- a. On Gateway, enter the **show lldp** command in the privileged EXEC mode.

```
Gateway# show lldp
% LLDP is not enabled
```

If LLDP is disabled, enter the **lldp run** command in the global configuration mode.

```
Gateway(config)# lldp run
```

- b. Use the **show lldp** command to verify that LLDP is enabled on Gateway.

```
Gateway# show lldp
```

Global LLDP Information:

```
Status: ACTIVE
LLDP advertisements are sent every 30 seconds
LLDP hold time advertised is 120 seconds
LLDP interface reinitialisation delay is 2 seconds
```

Issue the **show lldp neighbors** command. Which devices are neighbors to Gateway?

- c. If there are no LLDP neighbors for Gateway, enable LLDP on the switches. Issue **lldp run** in the global configuration mode on the devices.

```
S1(config)# lldp run
S2(config)# lldp run
S3(config)# lldp run
```

- d. Issue the **show lldp neighbors** command on the switches and router to list the LLDP enabled ports. The output for Gateway is shown below.

```
Gateway# show lldp neighbors
```

Capability codes:

```
(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other
```

Device ID	Local Intf	Hold-time	Capability	Port ID
S3	Gi0/1	120	B	Fa0/5

Total entries displayed: 1

- e. Issue the **show lldp neighbors detail** command on Gateway.


```
Gateway# show lldp neighbors detail
```

```
-----  
Local Intf: Gi0/1  
Chassis id: 0cd9.96e8.7400  
Port id: Fa0/5  
Port Description: FastEthernet0/5  
System Name: S3  
  
System Description:  
Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE7,  
RELEASE SOFTWARE (fc1)  
Technical Support: http://www.cisco.com/techsupport  
Copyright (c) 1986-2014 by Cisco Systems, Inc.  
Compiled Thu 23-Oct-14 14:49 by prod_rel_team  
  
Time remaining: 103 seconds  
System Capabilities: B  
Enabled Capabilities: B  
Management Addresses:  
    IP: 192.168.1.3  
Auto Negotiation - supported, enabled  
Physical media capabilities:  
    100base-TX(FD)  
    100base-TX(HD)  
    10base-T(FD)  
    10base-T(HD)  
Media Attachment Unit type: 16  
Vlan ID: 1  
  
Total entries displayed: 1
```

What port is used on S3 to connect to the Gateway router?

- f. Use the **show** command outputs from CDP and LLDP to document the connected ports in the network topology.



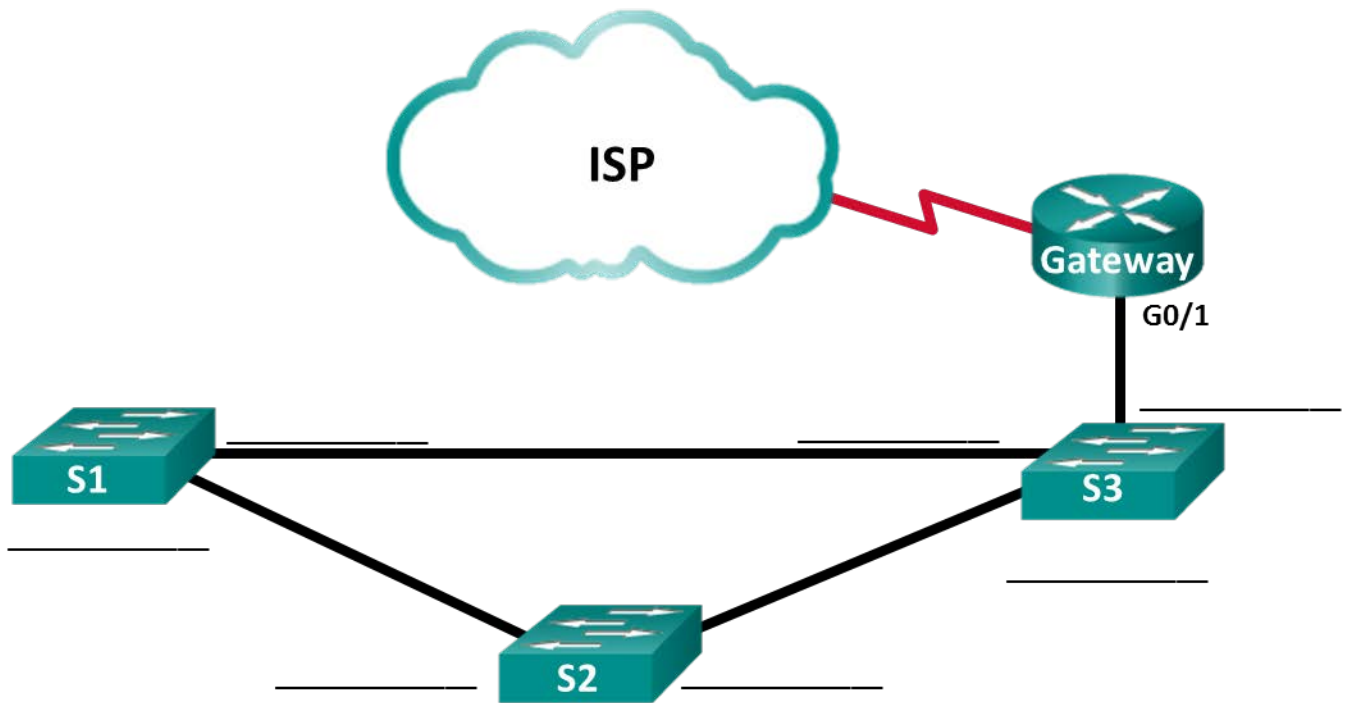

## Reflection

Within a network, on which interfaces should you not use discovery protocols? Explain.

**Router Interface Summary Table**

Router Interface Summary				
Router Model	Ethernet Interface #1	Ethernet Interface #2	Serial Interface #1	Serial Interface #2
1800	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
1900	Gigabit Ethernet 0/0 (G0/0)	Gigabit Ethernet 0/1 (G0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
2801	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/1/0 (S0/1/0)	Serial 0/1/1 (S0/1/1)
2811	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
2900	Gigabit Ethernet 0/0 (G0/0)	Gigabit Ethernet 0/1 (G0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
<b>Note:</b> To find out how the router is configured, look at the interfaces to identify the type of router and how many interfaces the router has. There is no way to effectively list all the combinations of configurations for each router class. This table includes identifiers for the possible combinations of Ethernet and Serial interfaces in the device. The table does not include any other type of interface, even though a specific router may contain one. An example of this might be an ISDN BRI interface. The string in parenthesis is the legal abbreviation that can be used in Cisco IOS commands to represent the interface.				