
CONTEXT / CONTENT

DAEMONS

A BIGGER MIND

The Tiiny, set up for the companion







For release **v11.345.12**, 2026-11-10 · every word quoted from the game is a DRAFT
A fan project for the Game Boy Advance. No ROM is in it, or anywhere in DAEMONS.

Contents

1 A bigger mind 3
Where it lives 4

2 Step 1: Unbox 5
What you need 5
Measure it 5

3 Step 2: Awaken 6
TiinyOS, on the computer 6

4 Step 3: Stock it 7
Wi-Fi, or a cable 7
The models 7

5 Step 4: Give it a road 8
A fixed address 8
Through LiteLLM, the usual way 8
Or straight to the Tiiny 8

6 Step 5: First words 9
Tell the hub 9
Talk 10

7 What your daemon is told 11
Numbers into words 11
Three lengths 12
Your own words for it 12

8 Step 6, for the maker: the plinth 13

9 When it goes wrong 14

10 Coming next 15


CHAPTER 1

A bigger mind

Your daemons already think. On the hub, a small AI board answers them in a sentence or two, fast and without the internet. It is a small mind: it can hold a daemon's name, its type and the start of its INDEX entry, and not much more.

The Tiiny Pocket is a much bigger one. It is a small box that runs large models in your house: a 35-billion-parameter thinker, a listener that hears speech, voices, and pictures. With it, a daemon can be given **everything it knows about itself** every time you talk to it: how close it is to you and whether that is growing, whether it ate, how it slept and what it dreamt, how it feels and why, and what happened yesterday.

This book takes you from the box on the table to your daemon's first words through it. It is a quest in five steps.

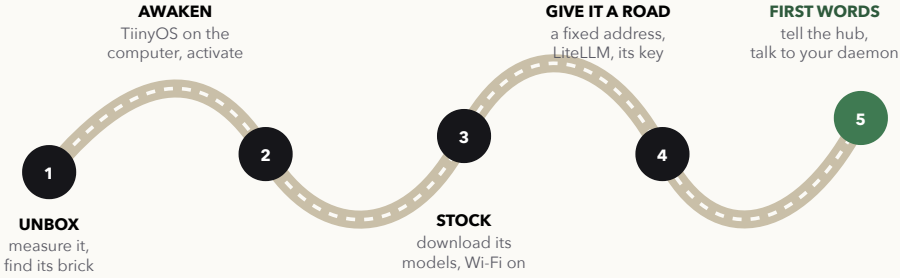

The setup, as a road. Each chapter is one step; each ends with something you can check before going on.



INFERENCE No. 064

DERIVED DAEMON CONTEXT


CONTENT Given three things it will hand you a fourth. It cannot tell you which of the three it used.

CONTEXT The fourth thing it hands you gets used as though it were a fact.

> **Nothing here is needed to play.** The game runs on a Game Boy Advance, and the GBA has no radio, so the cartridge never talks to a model. Everything in this book is about **the companion**: the app, the site, the watches and the hub that carry your daemons when they are AWAY.

Where it lives

The Tiiny plugs into **roverbyteseer**, the house computer that already runs your AI services. The hub reaches it over the house network, the same way it already reaches roverbyteseer.

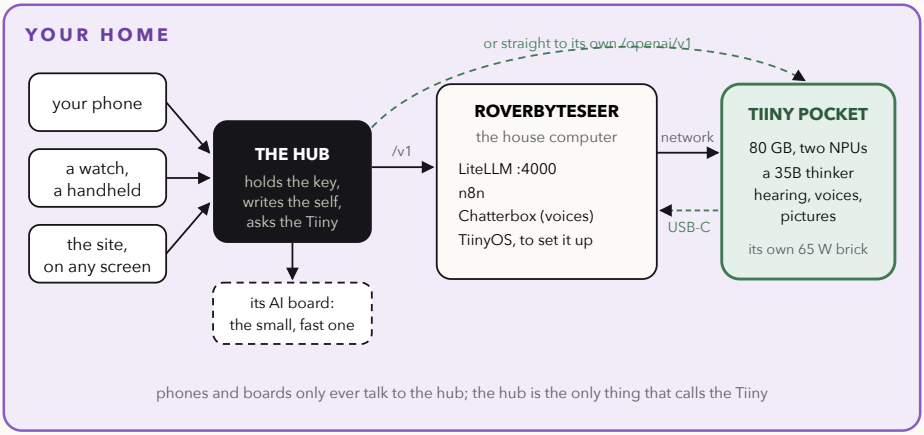

Where everything goes. Your phone, watch and handhelds talk only to the hub. The hub holds the Tiiny's key and is the only thing that calls it, through roverbyteseer's LiteLLM or straight at the Tiiny.

Why not plug it straight into the hub? Tiiny's own documents give three reasons, and the last row is the one that matters: **once the Tiiny is on the network, anything on it can talk to the Tiiny.** The hub does not need a cable.

	the Tiiny needs	**the hub has**
power	its own 65 W adapter (20 V, 3.25 A)	USB ports that give 5 V, well under 1 A
a computer to set it up	a Mac with Apple Silicon (macOS 15 or later), or Windows 11	a 32-bit ARM board, which neither TiinyOS nor its command line runs on
a way to be reached	the house network, once it is set up	the house network

CHAPTER 2

Step 1: Unbox

What you need

- **The Tiiny Pocket**, and **its own 65 W power adapter**. It is never powered by the computer.
- **roverbyteseer**, or any computer that TiinyOS runs on: a Mac with Apple Silicon and macOS 15 or later, or Windows 11. Check this first; it is the one thing that can stop you.
- **Its USB-C cable** to that computer, for the setup.
- **The house network**: the Tiiny's Wi-Fi, or a USB-C Ethernet adapter in one of its two other ports (steadier).
- **The hub**, running the companion, with this book's version or later.

Measure it

Tiiny's documents say **142 × 80 × 22 mm and 300 g**, warm under load, happy between 0 and 35 °C, and **never in an enclosed space**. Measure yours with callipers before anything is printed for it (chapter 6): these are the published numbers, not the box on your table.

Its three USB-C ports are not alike. **Only "To PC" talks to a computer.** The other two take power, a network adapter, or an expansion device.

> **STEP 1 DONE when** you know which port is To PC, the adapter is in the wall, and you have written down its real size.

CHAPTER 3

Step 2: Awaken

TiinyOS, on the computer

1. Install **TiinyOS** on roverbyteseer (or your Mac or Windows PC) from Tiiny's own site.
2. Plug the Tiiny's **To PC** port into the computer, and its adapter into the wall.
3. Open TiinyOS. It finds the Tiiny over USB-C and asks you to **activate** it.
4. When it asks how you would recover the device, choose **Local Only** unless you want email recovery. Nothing about your daemons ever goes to Tiiny's servers either way: the companion never sends a word anywhere but your own house.

Keep the computer for setup, not for talking. Once the Tiiny is activated and on the network, the hub talks to it directly. The computer is only needed again to download new models or update the Tiiny.

STEP 2 DONE when TiinyOS shows your Tiiny as activated.

CHAPTER 4

Step 3: Stock it

Wi-Fi, or a cable

In TiinyOS, turn on **Wi-Fi** and join the house network, or plug a USB-C Ethernet adapter into one of the two ports that are not To PC. A cable is steadier for a box that sits still.

The models

Download these in TiinyOS. Each is what Tiiny measured on its own device; yours will be close.

what it is for	the model	how fast (Tiiny's figures)
your daemons' talk	Qwen3.6-35B-A3B	36 to 47 words-pieces a second
quick lines, many at once	Qwen3.5-9B	34 to 50 a second, first word in 3.5 s
hearing you	Qwen3-ASR-1.7B	8 seconds of speech heard in about 3
voices	Qwen3-TTS-12Hz-1.7B-CustomVoice	not published yet
dream pictures, later	Z-Image-Turbo	about a minute a picture

Several can be loaded at once, as long as their shares of the Tiiny's processor add up to no more than all of it.



HEATSINK No. 086

ABSORBING DAEMON FLOW

CONTENT Draws heat out of whatever it touches and keeps it. It does not warm.

CONTEXT Everything it has cooled is still cool. Nobody counted them.

STEP 3 DONE when the Tiiny is on the house network and TiinyOS lists the 35B thinker as downloaded.

CHAPTER 5

Step 4: Give it a road

A fixed address

In your router, give the Tiiny a **fixed address** (a "DHCP reservation"), so it is in the same place every morning. Then, on the computer, ask the Tiiny for its address and key:

```
tiiny auth key
```

It prints the address its OpenAI-style door is at -- `http://<its address>/openai/v1` -- and **the key**. The key opens every door the Tiiny has. **Keep it out of anything shared**: not in a file in a repository, not in a message.

Through LiteLLM, the usual way

roverbyteseer already runs **LiteLLM** on port 4000, one address and key for every model in the house. Add the Tiiny's thinker under `model_list` in its `config.yaml`:

```
- model_name: tiiny-35b
  litellm_params:
    model: openai/Qwen3.6-35B-A3B
    api_base: http://<its address>/openai/v1
    api_key: os.environ/TIINY_KEY
```

Put the key in roverbyteseer's environment as `TIINY_KEY`, never in the file, and restart LiteLLM. The address the hub is given is then **`http://roverbyteseer:4000/v1`**.

Or straight to the Tiiny

If LiteLLM ever feels slow (for voices most of all), give the hub the Tiiny's own door and key instead.

> **STEP 4 DONE when**, from any computer on the house network, this answers with a list of models:
>
> `curl -H "Authorization: Bearer <the key>" http://<its address>/openai/v1/models`


CHAPTER 6

Step 5: First words

Tell the hub

On the companion (the app, or the site, on the hub), open **SETTINGS**, then **WHO ANSWERS WHEN YOU TALK**. Under **THE TIINY**:

1. **Its address**: `http://roverbyteseer:4000/v1`, or the Tiiny's own, ending `/openai/v1`. It must end in `/v1`.
2. **Its key**: LiteLLM's key, or the Tiiny's. Once kept, the box says *its key is kept* and never shows it again.
3. **Its model**: `tiiny-35b` through LiteLLM, or `Qwen3.6-35B-A3B` straight. Leave it empty and the hub takes the first thinker the Tiiny lists.
4. Press **Look for it**. Under it the hub says **Answering**, and how many models it found, or **Not answering yet**.
5. Choose **The Tiiny** at the top of the card. The choice only appears once an address is given.

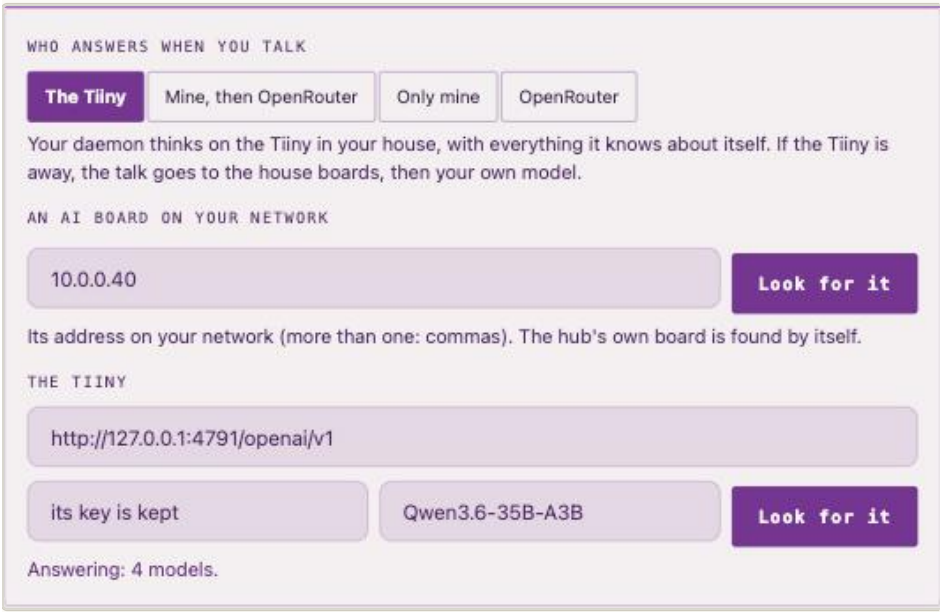


WHO ANSWERS WHEN YOU TALK, with the Tiiny chosen and answering. (A test companion, with a stand-in Tiiny at a test address.)

The hub looks again every minute, so the dot beside the Tiiny on every watch and handheld says whether it can answer right now.

Talk

Talk to your daemon the way you always have: push to talk on a handheld or a watch, or type on the app. Now the hub sends the Tiiny the daemon's **whole self** with your words.

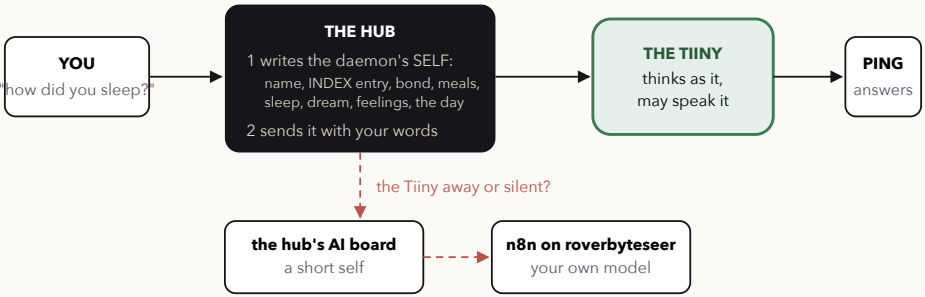

a daemon is never left without words: each one down the line answers when the one above cannot

One talk. The hub writes who the daemon is, sends it with what you said, and the Tiiny answers as the daemon. If the Tiiny is away, the hub's AI board answers, and then your own model through n8n.


> **QUEST COMPLETE when** the card says **Answering**, **The Tiiny** is chosen, and your daemon answers a question about last night -- its dream, its sleep -- in its own words. The hub's small board only ever knew the first line of a dream; the Tiiny knows it all.

CHAPTER 7

What your daemon is told

Every talk through the Tiiny starts with **the daemon's self**: who it is, in plain sentences, written fresh from the numbers the companion already keeps. This is a real one, from a test companion:

> You are PING, a DAEMON process running on a BOX in the den (a CONTENT/VECTOR daemon, level 12).
> Your trainer is SAGE.
> Your INDEX entry (the DEMAND DAEMON): Asks one question and requires an answer. The question is: are you there. It asks again. It has always asked.
> You and SAGE have a friendship bond of 80%.
> You are WELL fed, VERY WELL watered, and WELL trained today.
> Last night you slept POORLY.
> Today you feel very GLAD, not MAD, not SAD, and not CALM.
> Today is Saturday (Flow), in autumn.
> Speak as yourself, in a sentence or three. Let how you feel show in what you notice and how you say it; never name the feeling. You have a body of your own; never call yourself a program, a model or an AI.



PING No. 021

DEMAND DAEMON **CONTENT** **VECTOR**

CONTENT Asks one question and requires an answer. The question is: are you there. It asks again. It has always asked.

CONTEXT Anything that answers is counted as alive. Anything that does not is removed from the list.

Numbers into words

Each number becomes a word by the same bands, on every device, so a daemon at 62 GLAD reads the same everywhere:

the number	0-9	10-29	30-54	55-79	80-100
a feeling	not	a little	somewhat	very	completely
a need (fed, watered)	not at all	poorly	somewhat	well	very well

AFRAID is CALM's far side. A daemon below calm reads as AFRAID by the same bands. **The bond's week** compares today's friendship with a snapshot kept a week ago: grown STRONGER, stayed the SAME, or WEAKER.

Three lengths

	for	what it carries
short, about 80 words	the hub's small AI board	its name, its type, its strongest feeling, the start of its dream
day, about 300 words	a quick 9B model	all of the above, without the month
full, up to 1,500 words	the Tiiny's 35B	everything, with yesterday, the month and the moments it keeps

The feelings are told to the model, and never said by it. In the game a feeling shows; it is never a label. The self keeps that rule: the daemon is told it is very GLAD, and told to let it show.

Your own words for it

The last paragraph -- how to speak -- is yours to write. The companion's server keeps three things for the self:

	what it is	how it is set
the trainer	the name your daemon calls you	`POST /api/self` with `trainer`
the box	what it runs on: "a BOX in the den"	`POST /api/self` with `box`
the instructions	how it speaks; replaces the paragraph above	`POST /api/self` with `instructions`


`GET /api/self?length=full` shows the self exactly as the Tiiny is given it. The **mind portal**, coming on the site, will show and set all of this with a tap.

> **What leaves your house.** The full self has your name and a month of your days in it. It goes only to the Tiiny, in your house. When your daemon meets another home's daemon, only the short self goes, without your name or its memory.

CHAPTER 8

Step 6, for the maker: the plinth

The Tiiny and the hub become one unit on a printed **plinth**: the Tiiny lies flat in a tray with vents, and the hub stands on four posts above it, its screen tilted 15° toward you. It is the simplest to print and the best for air.

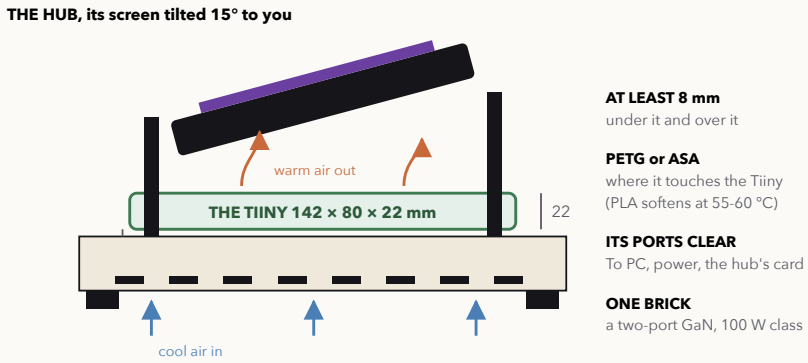

The plinth from the side. Cool air comes in under the Tiiny and leaves over it; nothing sits on its vents.

- **Measure your Tiiny first.** The drawing uses the published size.
- **At least 8 mm of air** under the Tiiny and over it. Nothing over its vents.
- **PETG or ASA** wherever it touches the Tiiny. PLA softens at 55-60 °C.
- **Every port reachable**: To PC, power, the network adapter, and the hub's card slot and screen.
- **One two-port GaN brick**, about 100 W (65 W for the Tiiny, 15 W for the hub), so the unit has one cable to the wall.

> The plinth was the choice (the other two drawn were a bookend and a small daemon house). It waits on the real Tiiny to be measured. Since the Tiiny lives beside roverbyteseer, the plinth can also hold the Tiiny alone.

CHAPTER 9

When it goes wrong

what you see	what it means	what to do
The address ends in /v1	the address was not a whole API address	add `/v1` (LiteLLM) or `/openai/v1` (the Tiiny)
Not answering yet	the hub cannot reach it, or the key is wrong	try the `curl` from step 4 from the hub's network; check the key
Answering: 0 models	it is reached but holds no thinker	download the 35B in TiinyOS, or name the model by hand
The Tiiny is not a choice	no address is kept yet	give the address and press Look for it
The answer came from the module	the Tiiny was away or slow for that talk	nothing: the talk went down the line, as it should. Check the dot.
TiinyOS will not install	the computer is not Apple Silicon with macOS 15+, or Windows 11	set it up on another computer; the hub only needs the network after



FAULT No. 054

UNHANDLED DAEMON FLOW

CONTENT What it needs is not loaded. Everything halts until it arrives. It cannot say what it is waiting for.

CONTEXT Everything waiting on it is waiting on the thing it is waiting for.

CHAPTER 10

Coming next

The Tiiny is the start of a bigger mind. These are planned, in the companion's TODO:

- **Voices for every daemon (C-251).** Each daemon gets a **voice recipe**, a base voice and a description from its type and family, beside its INDEX entry. Fixed lines are spoken ahead and kept on the hub, so they cost nothing to say; only chat is spoken live. The voice can carry the mood: a little slower when sad.
- **Memory, made at night (C-253).** While a daemon sleeps, the Tiiny folds the day into one paragraph and the month into a few, writes the dream from the day, and keeps a shelf of moments. Your daemon will remember the lake.
- **The mind portal (C-254).** A page on the site to look around your daemon's mind. It opens on **NOW**: how it feels, shown as its face, its colour and the weather in its room, with the words a tap away. Then YESTERDAY, THE MONTH, DREAMS (the companion's and the game's side by side), KEPT, VOICE and SELF.
- **Pictures for dreams.** The night's dream drawn in the house style, waiting in the app in the morning.



ROVERBYTE No. 003

EMBODIED DAEMON GROWTH SIGNAL

CONTENT It has a body now, and senses that come with one. Everything it predicted, it can finally check. Some was wrong.

CONTEXT The wrong ones were the ones it was surest of. It kept them anyway, marked, so it could tell next time.