

System Management Recabling Plan

Overview

System Managment will update racks x3701 and x3507. Only management and primary ethernet networks will be updated. No high speed updates are required.

Rack x3701 Switch Updates

Add the Aruba 6300 and two 8325's to u47, u46, and u45. The XD670 ILO ports on the existing management switch (MAN-3701U48) will be removed. Everything else on that switch will remain connected. No changes to the high speed sitches (HSNL-3701U42 and HSNL-3701U43) are required. An existing Aruba 8325 is currently in the rack and can be repurposed for this work.

A	manage man-3701u48	B	48
	Aruba 6300M 48G		47
	Aruba 8325 32P 100G		46
	Aruba 8325 32P 100G		45
			44
A	NDR hsns-3701u43	C	43
B	NDR hsnl-3701u42	A	42
			41

Note: New (and repurposed) switches shown with a green background.

Rack x3507 Switch Updates


Add the Aruba 6300, two 9300's, and two 8325's to u43 through u47. No changes to the high speed sitches (HSNL-3507U42 and HSNL-3507U43) are required. SERV-3507U05 iLO is connected to the local 6300M (FORGE-3507u47M) at port 17.

Two DL380's (DL-3507U23 and DL-3507U25) are NOT included in this recabling effort. No cables should be removed. Anything that that these nodes are cabled to should be left in place.


48	
47	Aruba 6300M 48G
46	Aruba 9300-32D 32p
45	Aruba 9300-32D 32p
44	Aruba 8325 32P 100G
43	Aruba 8325 32P 100G
42	
41	A NDR hsns-3507u41 B
40	A NDR hsnl-3507u40 B
39	

Note: New switches shown with a green background.

Server Connections — Rack x3701

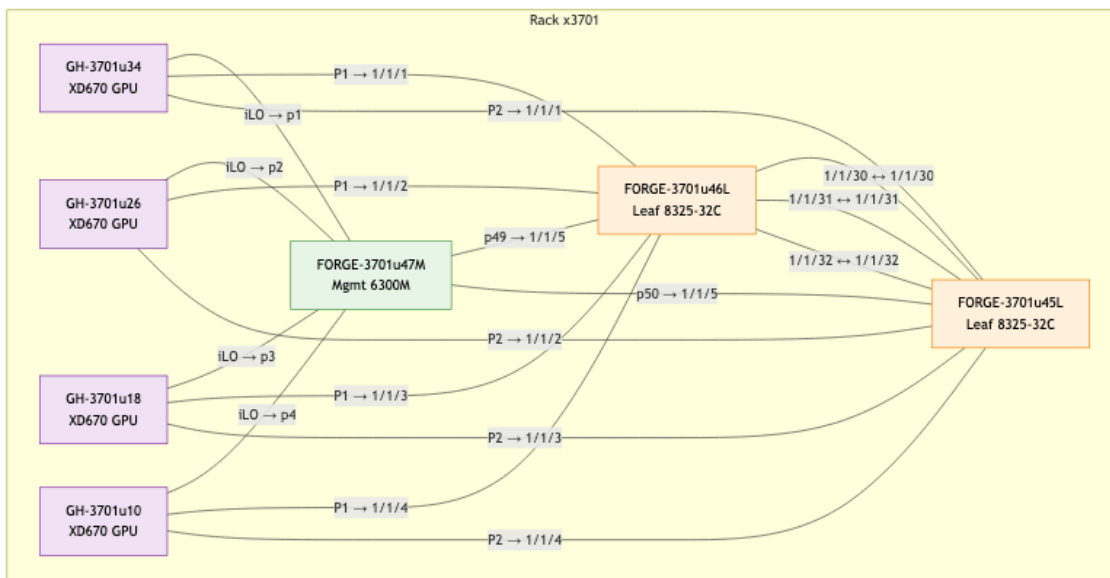


Server Connections — Rack x3507

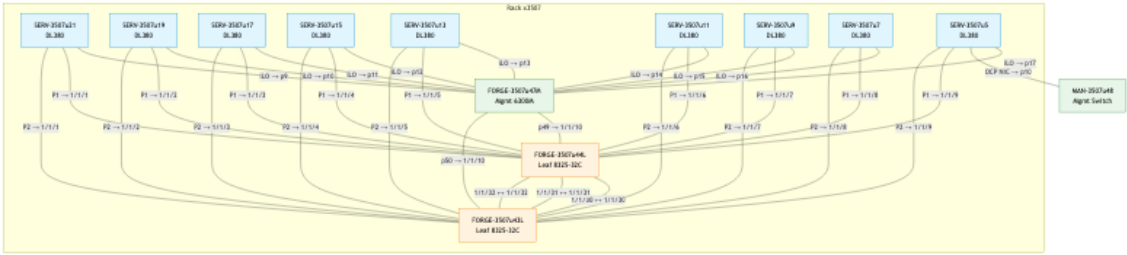

Legend

Color	Layer	Speed	Cable Type
Blue (management)	Layer 1	1 GbE	CAT6 STP 3m (intra-rack) / CAT5 RJ45 4.3m (cross-rack)
Orange (backbone)	Layer 1c	100 GbE	QSFP28-QSFP28 DAC 3m (intra-rack)
Orange (backbone)	Layer 2	100 GbE	QSFP28-QSFP28 AOC 15m (cross-rack) / DAC 3m (intra-rack)

Leaf / Spine / Backbone Fabric

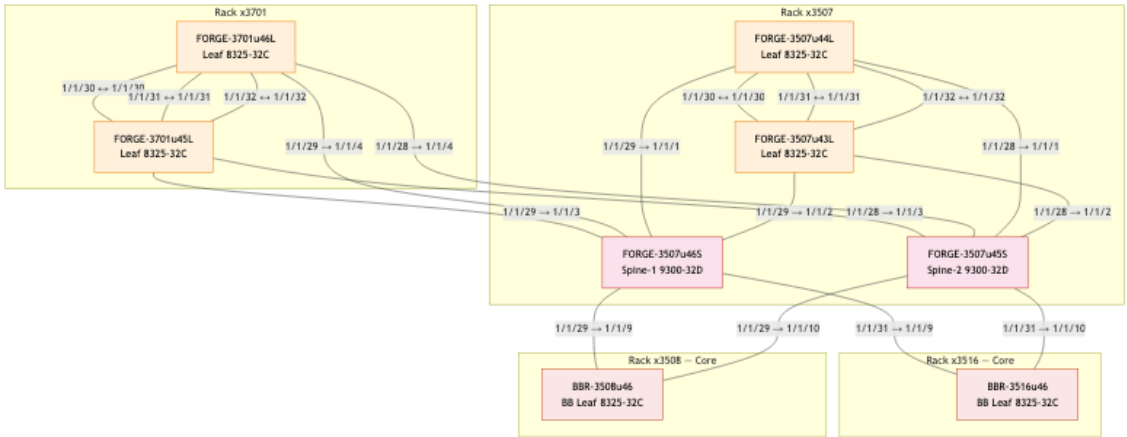

Switch Cabling Tables

FORGE-3507u44L — Leaf-1 (Aruba 8325-32C, 32x 100G QSFP28)

Port	Remote Device	Remote Port	Function	Cable
1/1/1	SERV-3507u21	Port 1	Server downlink	100G DAC 3m
1/1/2	SERV-3507u19	Port 1	Server downlink	100G DAC 3m
1/1/3	SERV-3507u17	Port 1	Server downlink	100G DAC 3m
1/1/4	SERV-3507u15	Port 1	Server downlink	100G DAC 3m

1/1/5	SERV-3507u13	Port 1	Server downlink	100G DAC 3m
1/1/6	SERV-3507u11	Port 1	Server downlink	100G DAC 3m
1/1/7	SERV-3507u9	Port 1	Server downlink	100G DAC 3m
1/1/8	SERV-3507u7	Port 1	Server downlink	100G DAC 3m
1/1/9	SERV-3507u5	Port 1	Server downlink	100G DAC 3m
1/1/10	FORGE-3507u47M	49	Mgmt switch uplink	10G DAC 3m
1/1/28	FORGE-3507u45S	1/1/1	Spine-2 uplink	100G DAC 3m
1/1/29	FORGE-3507u46S	1/1/1	Spine-1 uplink	100G DAC 3m
1/1/30	FORGE-3507u43L	1/1/30	ISL (VSX)	100G DAC 3m
1/1/31	FORGE-3507u43L	1/1/31	ISL (VSX)	100G DAC 3m
1/1/32	FORGE-3507u43L	1/1/32	ISL (VSX)	100G DAC 3m

FORGE-3507u43L — Leaf-2 (Aruba 8325-32C, 32× 100G QSFP28)

Port	Remote Device	Remote Port	Function	Cable
1/1/1	SERV-3507u21	Port 2	Server downlink	100G DAC 3m
1/1/2	SERV-3507u19	Port 2	Server downlink	100G DAC 3m
1/1/3	SERV-3507u17	Port 2	Server downlink	100G DAC 3m
1/1/4	SERV-3507u15	Port 2	Server downlink	100G DAC 3m
1/1/5	SERV-3507u13	Port 2	Server downlink	100G DAC 3m
1/1/6	SERV-3507u11	Port 2	Server downlink	100G DAC 3m
1/1/7	SERV-3507u9	Port 2	Server downlink	100G DAC 3m
1/1/8	SERV-3507u7	Port 2	Server downlink	100G DAC 3m
1/1/9	SERV-3507u5	Port 2	Server downlink	100G DAC 3m
1/1/10	FORGE-3507u47M	50	Mgmt switch uplink	10G DAC 3m
1/1/28	FORGE-3507u45S	1/1/2	Spine-2 uplink	100G DAC 3m
1/1/29	FORGE-3507u46S	1/1/2	Spine-1 uplink	100G DAC 3m
1/1/30	FORGE-3507u44L	1/1/30	ISL (VSX)	100G DAC 3m
1/1/31	FORGE-3507u44L	1/1/31	ISL (VSX)	100G DAC 3m
1/1/32	FORGE-3507u44L	1/1/32	ISL (VSX)	100G DAC 3m

FORGE-3507u46S — Spine-1 (Aruba 9300-32D, 32× 400G QSFP-DD + 2× 10G SFP+)

Port	Remote Device	Remote Port	Function	Cable
1/1/1	FORGE-3507u44L	1/1/29	Leaf-1 downlink	100G DAC 3m
1/1/2	FORGE-3507u43L	1/1/29	Leaf-2 downlink	100G DAC 3m
1/1/3	FORGE-3701u45L	1/1/29	x3701 Leaf downlink	100G AOC 15m
1/1/4	FORGE-3701u46L	1/1/29	x3701 Leaf downlink	100G AOC 15m
1/1/29	BBR-3508u46	1/1/9	BB Leaf uplink	100G AOC 15m
1/1/31	BBR-3516u46	1/1/9	BB Leaf uplink	100G AOC 15m

FORGE-3507u45S — Spine-2 (Aruba 9300-32D, 32× 400G QSFP-DD + 2× 10G SFP+)

Port	Remote Device	Remote Port	Function	Cable
1/1/1	FORGE-3507u44L	1/1/28	Leaf-1 downlink	100G DAC 3m
1/1/2	FORGE-3507u43L	1/1/28	Leaf-2 downlink	100G DAC 3m
1/1/3	FORGE-3701u45L	1/1/28	x3701 Leaf downlink	100G AOC 15m
1/1/4	FORGE-3701u46L	1/1/28	x3701 Leaf downlink	100G AOC 15m
1/1/29	BBR-3508u46	1/1/10	BB Leaf uplink	100G AOC 15m
1/1/31	BBR-3516u46	1/1/10	BB Leaf uplink	100G AOC 15m

BBR-3508u46 — Router-1 (Aruba 8325-32C 32-PORT 100G QSFP+/QSFP28)

Port	Remote Device	Remote Port	Function	Cable
1/1/9	FORGE-3507u46S	1/1/29	BB Leaf uplink	100G AOC 15m
1/1/10	FORGE-3507u45S	1/1/29	BB Leaf uplink	100G AOC 15m
1/1/20	FORT-3508u41	1/1/25	Fortigate uplink	100G AOC 15m

BBR-3516u46 — Router-2 (Aruba 8325-32C 32-PORT 100G QSFP+/QSFP28)

Port	Remote Device	Remote Port	Function	Cable
1/1/9	FORGE-3507u46S	1/1/31	BB Leaf uplink	100G AOC 15m
1/1/10	FORGE-3507u45S	1/1/31	BB Leaf uplink	100G AOC 15m
1/1/20	FORT-3516u41	1/1/25	Fortigate uplink	100G AOC 15m

FORGE-3701u46L — Leaf (Aruba 8325-32C, 32× 100G QSFP28)

Port	Remote Device	Remote Port	Function	Cable
1/1/1	GH-3701u34	Port 1	GPU downlink	100G DAC 3m

1/1/2	GH-3701u26	Port 1	GPU downlink	100G DAC 3m
1/1/3	GH-3701u18	Port 1	GPU downlink	100G DAC 3m
1/1/4	GH-3701u10	Port 1	GPU downlink	100G DAC 3m
1/1/5	FORGE-3701u47M	49	Mgmt switch uplink	10G DAC 3m
1/1/28	FORGE-3507u45S	1/1/4	Spine-2 uplink	100G AOC 15m
1/1/29	FORGE-3507u46S	1/1/4	Spine-1 uplink	100G AOC 15m
1/1/30	FORGE-3701u45L	1/1/30	ISL (VSX)	100G DAC 3m
1/1/31	FORGE-3701u45L	1/1/31	ISL (VSX)	100G DAC 3m
1/1/32	FORGE-3701u45L	1/1/32	ISL (VSX)	100G DAC 3m

FORGE-3701u45L — Leaf (Aruba 8325-32C, 32x 100G QSFP28)

Port	Remote Device	Remote Port	Function	Cable
1/1/1	GH-3701u34	Port 2	GPU downlink	100G DAC 3m
1/1/2	GH-3701u26	Port 2	GPU downlink	100G DAC 3m
1/1/3	GH-3701u18	Port 2	GPU downlink	100G DAC 3m
1/1/4	GH-3701u10	Port 2	GPU downlink	100G DAC 3m
1/1/5	FORGE-3701u47M	50	Mgmt switch uplink	10G DAC 3m
1/1/28	FORGE-3507u45S	1/1/3	Spine-2 uplink	100G AOC 15m
1/1/29	FORGE-3507u46S	1/1/3	Spine-1 uplink	100G AOC 15m
1/1/30	FORGE-3701u46L	1/1/30	ISL (VSX)	100G DAC 3m
1/1/31	FORGE-3701u46L	1/1/31	ISL (VSX)	100G DAC 3m
1/1/32	FORGE-3701u46L	1/1/32	ISL (VSX)	100G DAC 3m

BBR-3516u46 — BB Leaf (Aruba 8325-32C, 32x 100G QSFP28)

Port	Remote Device	Remote Port	Function	Cable
1/1/9	FORGE-3507u46S	1/1/31	Spine-1 downlink	100G AOC 15m
1/1/10	FORGE-3507u45S	1/1/31	Spine-2 downlink	100G AOC 15m

BBR-3508u46 — BB Leaf (Aruba 8325-32C, 32x 100G QSFP28)

Port	Remote Device	Remote Port	Function	Cable
1/1/9	FORGE-3507u46S	1/1/29	Spine-1 downlink	100G AOC 15m
1/1/10	FORGE-3507u45S	1/1/29	Spine-2 downlink	100G AOC 15m

FORGE-3701u47M — Mgmt (Aruba 6300M, 48× 1G + 4× 25G SFP28)

Port	Remote Device	Remote Port	Function	Cable
1	GH-3701u34	iLO	Management	CAT6 3m
2	GH-3701u26	iLO	Management	CAT6 3m
3	GH-3701u18	iLO	Management	CAT6 3m
4	GH-3701u10	iLO	Management	CAT6 3m
49	FORGE-3701u46L	1/1/5	Leaf uplink	10G DAC 3m
50	FORGE-3701u45L	1/1/5	Leaf uplink	10G DAC 3m

FORGE-3507u47M — Mgmt (Aruba 6300M, 48× 1G + 4× 25G SFP28)

Port	Remote Device	Remote Port	Function	Cable
9	SERV-3507u21	iLO	Management	CAT6 3m
10	SERV-3507u19	iLO	Management	CAT6 3m
11	SERV-3507u17	iLO	Management	CAT6 3m
12	SERV-3507u15	iLO	Management	CAT6 3m
13	SERV-3507u13	iLO	Management	CAT6 3m
14	SERV-3507u11	iLO	Management	CAT6 3m
15	SERV-3507u9	iLO	Management	CAT6 3m
16	SERV-3507u7	iLO	Management	CAT6 3m
17	SERV-3507u5	iLO	Management	CAT6 3m
49	FORGE-3507u44L	1/1/10	Leaf uplink	10G DAC 3m
50	FORGE-3507u43L	1/1/10	Leaf uplink	10G DAC 3m
