

Print?

An illustration of two stylized human figures, a woman on the left and a man on the right, standing next to a large blue question mark. The woman is wearing a blue shirt and black pants, and the man is wearing a grey shirt and black pants. They appear to be looking at the question mark with some confusion or curiosity.

Easy Debugging





Create Custom Class For Printing

```
1 class AppLogs {
2   AppLogs._();
3
4   static String get _getCurrentTime {
5     final DateTime now = DateTime.now();
6     return '${now.minute}:${now.second}:${now.millisecond}';
7   }
8
9   /*Success
10   static void successLog(String message, [String tag = 'Success']) {
11     if (kDebugMode) {
12       log('\x1B[32m$tag 🟢🟢🟢🟢🟢🟢🟢🟢🟢🟢: $message\x1B[0m', name: 'Success $_getCurrentTime', level:
13       1: 0);
14     }
15
16   /*debug
17   static void debugLog(String message, [String tag = 'Debug']) {
18     if (kDebugMode) {
19       log('\x1B[37m$tag 🟡🟡🟡🟡🟡🟡🟡🟡🟡🟡: $message\x1B[0m', name: 'Debug $_getCurrentTime', level:
20       1); }
21     }
22
23   /*info
24   static void infoLog(String message, [String tag = 'Info']) {
25     if (kDebugMode) {
26       log('\x1B[33m$tag 🟠🟠🟠🟠🟠🟠🟠🟠🟠🟠: $message\x1B[0m', name: 'Info $_getCurrentTime', level:
27       2); }
28     }
29
30   /*error
31   static void errorLog(String message, [String tag = 'Error']) {
32     if (kDebugMode) {
33       log('\x1B[31m$tag 🔴🔴🔴🔴🔴🔴🔴🔴🔴🔴: $message\x1B[0m', name: 'Error $_getCurrentTime', level:
34       3); }
35     }
36   }
```






How to use ?

```
1 void main() async {  
2   AppLogs.debugLog("This is a warning message.");  
3   AppLogs.errorLog("This is an error message.");  
4   AppLogs.infoLog("This is an info message.");  
5   AppLogs.successLog("This is a success message.");  
6 }
```





When calling any logging method, the console might show something like:

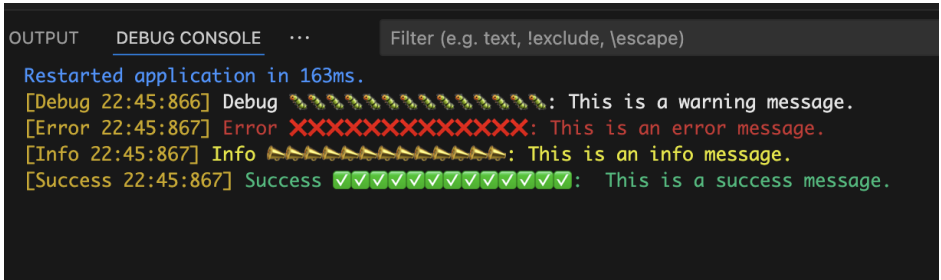



Ahmed Hussein
Flutter Developer

THANK YOU



Was This Helpful?

Like, Share and Follow
for more Content



Like



Comment



Share



Save

